

**APPENDIX F**

**INTERNAL SIGNAGE  
AND GRAPHICS  
MANUAL**

MESSAGE TYPE			MOUNTING TYPE								
Message Code	Manual Page #	MESSAGE INDEX	Post Mount			PM	F	OFM	FM	WM	Other
			FM-1	FM-2	C-3						
		<b>Text and Symbols:</b>									
ACC-PRK	35	(Accessibility symbol) PARKING BY DISABLED PERMIT ONLY				X					
ACC-VAN	35	(Accessibility symbol) PARKING BY DISABLED PERMIT ONLY VAN ACCESSIBLE				X					
BIK-LOK	39	(Bike Restriction Symbol) DO NOT LOCK BICYCLES TO THE RAMP USE BICYCLE RACKS (Tri-Rail ligature)					X		X		
BT-L	25	(Left Arrow) BUSES TAXIS (Tri-Rail ligature)	X								
BT-R	25	(Right Arrow) BUSES TAXIS (Tri-Rail ligature)	X								
BT-U	25	(Up Arrow) BUSES TAXIS (Tri-Rail ligature)	X								
BUS	23	BUS STOP (Bus Symbol) (Tri-Rail ligature)	X								
C1-XXX	20	(Tri-Rail logo) STATION NAME									C-1
C2-XXX	21	(Tri-Rail logo) STATION NAME									C-2
CAU	36	CAUTION WATCH FOR MOVING TRAINS (Tri-Rail ligature)				X	X			X	
CR-DW	38	DO NOT CROSS ON TRACKS CROSS AT DESIGNATED WALKWAY (Tri-Rail logo)				X	X			X	
CR-OB	38	DO NOT CROSS ON TRACKS CROSS AT OVERHEAD BRIDGE (Tri-Rail logo)				X	X			X	
DROP	24	PASSENGER PICK-UP DROP-OFF (Passenger/Car Symbol) (Tri-Rail ligature)	X								
DROP-ACC	23	0	X								
DROP--R	25 sim	PARKING (Right Arrow) PASSENGER DROPOFF PICKUP (Right Arrow) (Tri-Rail ligature)	X								
D-SPD	36	(Tri-Rail ligature) DANGER SOME HIGH SPEED TRAINS DO NOT STOP AT THIS STATION STAND WELL BEHIND THE YELLOW STRIP				X	X			X	
ELEC	47	ELECTRICAL ROOM (also in Braille)								X	
ELEV	43, 44	(Accessible elevator symbol) ELEVATOR (Braille)								X	
ELEV-BR	43	(Accessible elevator symbol) ELEVATOR								X	
JAN	47	JANITOR (also in Braille)								X	

**Legend**

- C-1 Canopy Mount, Long Panel
- C-2 Canopy Mount, Short Panel
- C-3 Double Post Mounted Station Identity
- D Directory

- F Fence Mount
- FM-1 Flag Post Mount
- FM-2 Smaller Flag Post Mount
- KI Information Kiosk

- LM Line Map
- ME Main Entry Monument
- OFM Overhead Flag Mount
- PH Phasing Sign

- PM Post Mount
- PY Entry Pylon
- SIM Similar To
- SID Single Post Mount Station Identity

- WM Wall or Column Mount



MESSAGE TYPE			MOUNTING TYPE								
Message Code	Manual Page #	MESSAGE INDEX	Post Mount				F	OFM	RM	WM	Other
			FM-1	FM-2	C-3	PM					
		<i>Text and Symbols:</i>									
LM-XXXN	30, 33	(Northbound Line Map Graphics) STATION NAME								D, KI, LM	
LM-XXXs	30, 33	(Southbound Line Map Graphics) STATION NAME								D, KI, LM	
MECH	47	MECHANICAL ROOM (also in Braille)							X		
ME-XXX	48	(Tri-Rail logo) STATION NAME (Tri-Rail logo) (Amtrak logo)								ME	
PH	46	WE'RE IMPROVING TRI-RAIL...etc. (Map)								PH	
POL-BIK	39	(Bike Symbol) ONLY BICYCLES WITH TRI-RAIL ISSUED PERMIT STICKERS ARE ALLOWED ON TRAINS CALL 1-800-TR-RAIL TO OBTAIN PERMIT (Tri-Rail ligature)				X	X		X		
POL-DISC	42	(Tri-Rail logo) ATTENTION TRI-RAIL PASSENGERS DISCOUNT POLICY				X	X			X	
POL-POP	41	(Tri-Rail logo) ATTENTION TRI-RAIL PASSENGERS PROOF OF PURCHASE ...				X	X			X	
POL-TIK	45	PASSENGERS MUST HAVE A VALID TICKET...etc (span.sh) (french)				X	X		X	X	
PY-XXX	16	(Tri-Rail logo) STATION NAME (Raised & Braille)								PY	
RR-M	40	(Men symbol) MEN (also in Braille)							X		
RR-U	40 sim	(Restroom symbol) RESTROOMS (also in Braille)							X		
RR-W	40	(Women symbol) WOMEN (also in Braille)							X		
SHU-AIRP	23	AIRPORT SHUTTLE STOP (Bus Symbol) (Tri-Rail ligature)	X								
SHU-TRI	23 SIM	TRI-RAIL SHUTTLE STOP (Bus Symbol) (Tri-Rail ligature)	X								
SID-XXX	29	(Tri-Rail logo) STATION NAME								SID	
TIK-L	25 sim	(Left Arrow) TICKETS (Tri-Rail ligature)	X							X	
TIK-R	25	(Right Arrow) TICKETS (Tri-Rail ligature)	X							X	
TIK-U	25 SIM	(Up Arrow) TICKETS (Tri-Rail ligature)	X							X	
TOW	25	NOTICE TRI-RAIL PASSENGER PARKING ONLY UNAUTHORIZED VEHICLES WILL BE TOWED AT OWNERS' EXPENSE (Tri-Rail ligature)	X								



MESSAGE TYPE			MOUNTING TYPE								
Message Code	Manual Page #	MESSAGE INDEX	Post Mount				F	OFM	RM	WM	Other
			FM-1	FM-2	C-3	PM					
		<i>Symbols Only:</i>									
ACC-L	28	(Left Arrow) (Accessibility symbol)		X				X		X	
ACC-R	28 sim	(Right Arrow) (Accessibility symbol)		X				X		X	
ACC-TR	28 sim	(Accessible Ramp To Train symbol)		X				X		X	
ACC-TR-L	28	(Left Arrow) (Accessible Ramp To Train symbol)		X				X		X	
ACC-TR-R	28 sim	(Right Arrow) (Accessible Ramp To Train symbol)		X				X		X	
ACC-TR-U	28 sim	(Up Arrow) (Accessible Ramp To Train symbol)		X				X		X	
ACC-U	28 sim	(Up Arrow) (Accessibility symbol)		X				X		X	
ELV-L	28	(Left Arrow) (Accessible elevator symbol)		X				X		X	
ELV-R	28 sim	(Right Arrow) (Accessible elevator symbol)		X				X		X	
ELV-U	28 sim	(Up Arrow) (Accessible elevator symbol)		X				X		X	
NPRK	26	(No Parking symbol) (Tri-Rail ligature)	X								
PRK	26	(Parking symbol) (Tri-Rail ligature)	X								
PRK-L	26 sim	(Left Arrow) (Parking symbol) (Tri-Rail ligature)	X								
PRK-R	26	(Right Arrow) (Parking symbol) (Tri-Rail ligature)	X								
PRK-U	26	(Up Arrow) (Parking symbol) (Tri-Rail ligature)	X								
TDD-L	40	(Left Arrow) (Raised TDD Telephone symbol)						X		X	
TDD-R	40	(Right Arrow) (Raised TDD Telephone symbol)						X		X	



<b>CONTENT</b>	<b>PAGE</b>
<b>GENERAL</b>	
MESSAGE AND MOUNTING INDEX .....	i, ii, iii
CONTENTS .....	1, 2
DETAIL PAGE GUIDE .....	3
LOGOTYPE COLOR USAGE .....	4
LOGOTYPE BLACK AND WHITE USAGE .....	5
LOGOTYPE COLOR USAGE ON DARK BACKGROUND .....	6
LOGOTYPE BLACK AND WHITE USAGE ON DARK BACKGROUND .....	7
(PMS) COLORS PANTONE MATCHING SYSTEM .....	8
(PMS) BLACK AND WHITE COLORS PANTONE MATCHING SYSTEM .....	9
ALPHABET .....	10
SYMBOLS .....	11
STATION IDENTITY PYLON SIGNAGE (COLOR EXHIBIT) .....	12
STATION END CANOPY IDENTITY SIGNAGE (COLOR EXHIBIT) .....	13
STATION POST MOUNT SIGNAGE (COLOR EXHIBIT) .....	14
STATION LINE MAP SIGNAGE (COLOR EXHIBIT) .....	15
 <b>SIGN TEXT LAYOUTS</b>	
C-1 (CANOPY) DEERFIELD BEACH AND MANGONIA PARK ELEVATION .....	19
C-1 (CANOPY) TYPICAL STATION IDENTITY SIGN AND SIGN LENGTH CRITERIA .....	20
C-2 (CANOPY) TYPICAL STATION IDENTITY SIGN AND SIGN LENGTH CRITERIA .....	21
C-3 (POST MOUNT STATION IDENTITY) FRONT ELEVATION .....	34
D (WALL MOUNTED DIRECTORY) FRONT ELEVATION .....	30
F (FENCE MOUNT) PANEL ELEVATIONS .....	38
F (FENCE MOUNT) PANEL ELEVATION .....	39
FM-1 (FLAG MOUNT) POST ELEVATION .....	22
FM-1 (FLAG MOUNT) PANEL ELEVATIONS .....	23
FM-1 (FLAG MOUNT) PANEL ELEVATIONS .....	24
FM-1 (FLAG MOUNT) PANEL ELEVATIONS .....	25
FM-1 (FLAG MOUNT) PANEL ELEVATIONS .....	26
FM-2 (FLAG MOUNT) POST ELEVATION .....	27
FM-2 (FLAG MOUNT) PANEL ELEVATIONS .....	28
KI (KIOSK) FRONT ELEVATION .....	30
KI (KIOSK) SIDE ELEVATION .....	31
KI (KIOSK) PLAN VIEW .....	32
LM (LINE MAP) FRONT AND SIDE ELEVATIONS .....	33
PH (PHASING SIGN) ELEVATION .....	46
PL (PLAQUE) ELEVATION.....	47
PM (POST MOUNT) POST AND PANEL ELEVATIONS.....	35
PM (POST MOUNT) POST AND PANEL ELEVATIONS.....	36
PM (POST MOUNT) POST AND PANEL ELEVATIONS.....	37
PM (POST MOUNT) PANEL ELEVATION.....	39



<b>CONTENT</b>	<b>PAGE</b>
<b>SIGN TEXT LAYOUTS</b>	
PY (PYLON) FRONT/REAR ELEVATIONS .....	16
PY (PYLON) SIDE ELEVATION .....	17
PY (PYLON) PLAN VIEW .....	18
RM (RAIL MOUNT) PANEL ELEVATIONS .....	39
SID (STATION IDENTITY) ELEVATION .....	29
WM (WALL MOUNT) PANEL ELEVATIONS .....	39
WM (WALL MOUNT) PANEL ELEVATIONS .....	40
WM (WALL MOUNT) PANEL ELEVATIONS .....	41
WM (WALL MOUNT) PANEL ELEVATIONS .....	42
WM (WALL MOUNT) PANEL ELEVATIONS .....	43
WM (WALL MOUNT) PANEL ELEVATIONS .....	44
WM (WALL MOUNT) PANEL ELEVATIONS .....	45
<b>DETAIL DRAWINGS</b>	
C1-C2 (CANOPY) HANGER ATTACHMENT AND CROSS SECTION, DETAIL 1 .....	55
C1-C2 (CANOPY) CANVAS CANOPY ATTACHMENT, DETAIL 11 .....	53
C-3 (POST MOUNT STATION IDENTITY) ELEVATIONS, DETAIL 5 .....	57
F (FENCE MOUNT) ELEVATION AND SIDE VIEW, DETAIL 7 .....	62
KI (KIOSK) MOUNTING SECTION AND PLAN VIEW , DETAIL 2 .....	51
KI (KIOSK) SECTIONS, DETAIL 12-13 .....	54
LM (LINE MAP) MOUNTING SECTION, DETAIL 9-10 .....	52
ME (MAIN ENTRY) ELEVATION AND CROSS SECTION, DETAIL 1-2 .....	48
ME (MAIN ENTRY) LOGO ELEVATION AND CROSS SECTION, DETAIL 4 -5 .....	49
ME (MAIN ENTRY) CROSS SECTIONS, DETAIL 6-7 .....	50
PH (PHASING SIGN) SECTION AND PLAN VIEW, DETAIL 2 .....	60
PM (POST MOUNT) PLAN VIEW SECTIONS, DETAIL 3-4 .....	58
PM (POST MOUNT) REAR ELEVATION, SIDE VIEW AND PLAN VIEW, DETAIL 4 .....	59
PY (PYLON) MOUNTING SECTION AND PLAN VIEW, DETAIL 2 .....	51
RM (RAIL MOUNT) ELEVATION AND SECTION, DETAIL 6 .....	61
SID (STATION IDENTITY FLAG MOUNT) ELEVATION AND PLAN VIEW, DETAIL 1 .....	56
WM (WALL MOUNT) SIDE VIEW, DETAIL 23 .....	63
<b>APPENDIX</b>	
KI (KIOSK) ADA "FEELER" BAR DETAIL .....	A1
LM (LINE MAP) ADA "FEELER" BAR DETAIL .....	A2
PH (PHASING SIGN) ADA "FEELER" BAR DETAIL .....	A3

**OTHER RESOURCES AVAILABLE FROM TRI-RAIL OFFICE**

- TECHNICAL SPECIFICATIONS, SECTION 10400, SIGNAGE
- ORIGINAL BID SET OF CONSTRUCTION DOCUMENTS, AVAILABLE ELECTRONICALLY
- MINUTES OF STATION-BY-STATION WALKTHROUGH MEETING
- RFI'S AND RESPONSES

PAGE AND DETAIL GUIDE RELATING TO  
PAGE NUMBERS OF THE MANUAL (REPRESENTED BY THE SQUARE)  
AND THE SHEET NUMBER OF THE AUTOCAD DRAWINGS (REPRESENTED BY THE CIRCLE).  
THE ORIGINAL BID DOCUMENTS WERE DRAWN IN AUTOCAD FORMAT  
AND SHOULD BE USED FOR FABRICATION DRAWINGS.  
THE MANUAL IS AN INFORMATIONAL GUIDE FOR OVERALL PLANNING.

**MANUAL  
DRAWINGS**



REFERS TO  
DETAIL NUMBER  
IN MANUAL  
REFERS TO  
MANUAL PAGE  
NUMBER IN THIS  
DOCUMENT

**AUTOCAD  
DRAWINGS**



REFERS TO  
DETAIL NUMBER  
IN DRAWING SET  
REFERS TO  
SHEET NUMBER IN  
CAD GENERATED  
BID DOCUMENTS



NO DETAIL  
REFERS TO  
MANUAL PAGE  
NUMBER IN THIS  
DOCUMENT




NO DETAIL  
REFERS ONLY  
SHEET NUMBER IN  
CAD GENERATED  
BID DOCUMENTS




**TRI-RAIL LOGOTYPE COLOR USAGE**

LETTERING.....PMS 315 C (TEAL)  
RED ARROW.....PMS 165 C (RED)  
BLUE ARROW.....PMS PROCESS BLUE C (BLUE)  
GREEN ARROW.....PMS 375 C (GREEN)

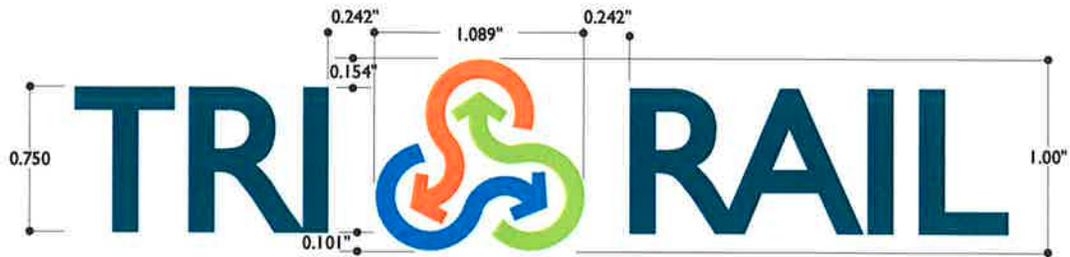

NOTE: ARROW LOGOTYPE SHALL BE LARGER THAN TRI-RAIL LETTERING  
AND SHALL BE ALIGNED OFF CENTER TOWARD TOP WHEN APPEARING ON ONE LINE

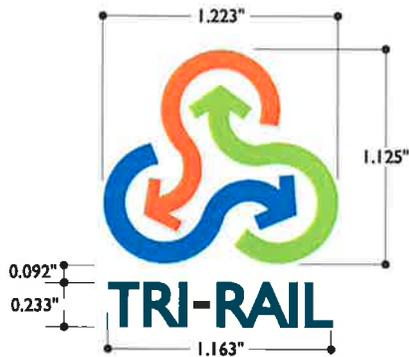


SCALE: 1' = 1"




**TRI-RAIL LOGOTYPE BLACK AND WHITE USAGE**

LETTERING.....PMS BLACK C.....(\* 100% BLACK) = PMS 315 C (TEAL)  
 TOP ARROW.....PMS 423 C.....(\* 55% BLACK) = PMS 165 C (RED)  
 LEFT ARROW.....PMS 425 C.....(\* 70% BLACK) = PMS PROCESS BLUE C (BLUE)  
 RIGHT ARROW.....PMS 422 C.....(\* 40% BLACK) = PMS 375 C (GREEN)

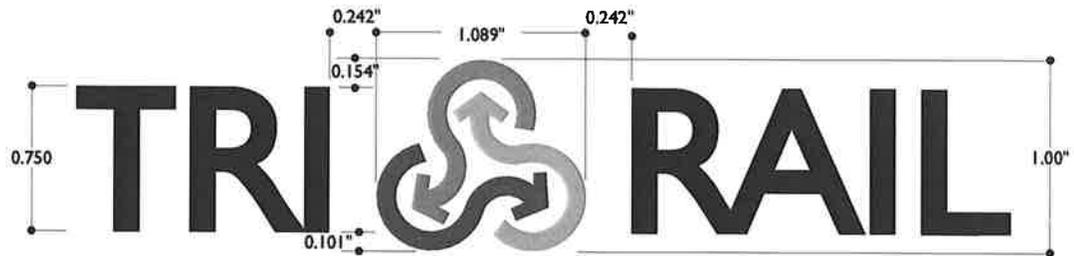

NOTE: ARROW LOGOTYPE SHALL BE LARGER THAN TRI-RAIL LETTERING  
 AND SHALL BE ALIGNED OFF CENTER TOWARD TOP WHEN APPEARING ON ONE LINE

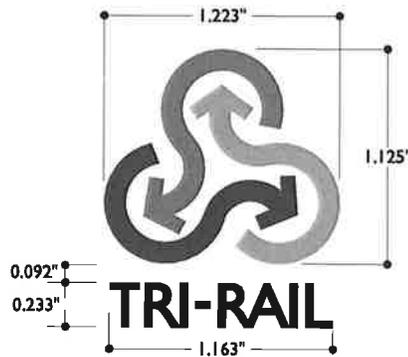


SCALE: 1" = 1"



**LOGOTYPE ON DARK BACKGROUND**

- BACKGROUND.....PMS 315 C (TEAL)
- ARROW FIELD.....WHITE
- LETTERING.....WHITE
- RED ARROW.....PMS 165 C (RED)
- BLUE ARROW.....PMS PROCESS BLUE C (BLUE)
- GREEN ARROW.....PMS 375 C (GREEN)

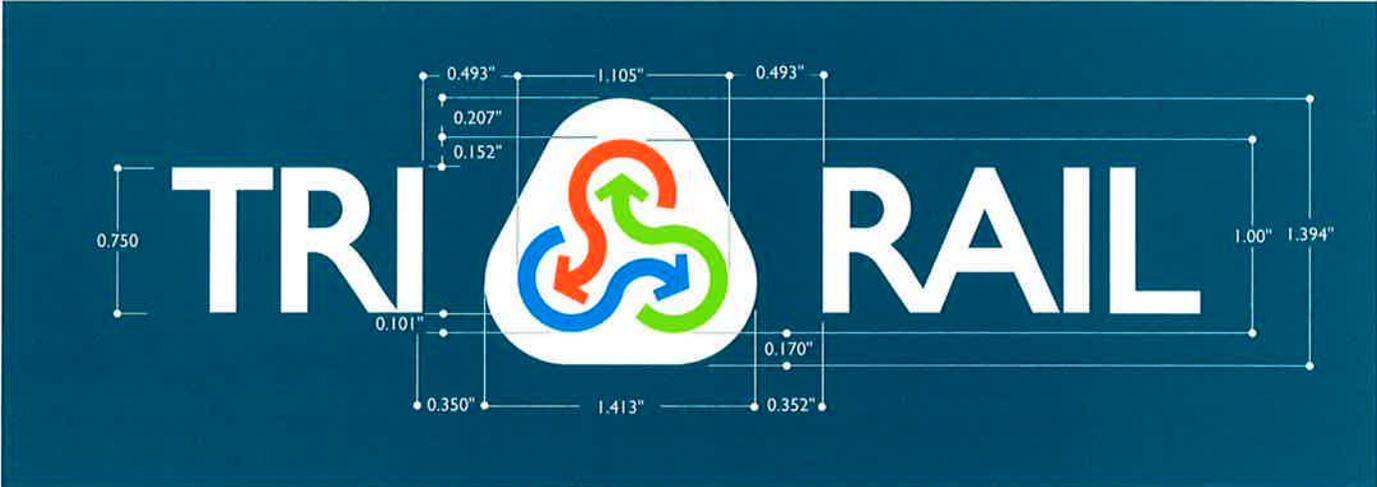


NOTE: ARROWS OF LOGOTYPE SHALL BE LARGER THAN TRI-RAIL LETTERING AND SHALL BE ALIGNED OFF CENTER TOWARD TOP WHEN APPEARING ON ONE LINE

SCALE: 1" = 1"



**LOGOTYPE ON DARK BACKGROUND**

- BACKGROUND.....PMS BLACK C..... (\*100% BLACK) = PMS 315 C (TEAL)
- ARROW FIELD.....WHITE
- LETTERING.....WHITE
- TOP ARROW.....PMS 423 C.....(\*55% BLACK) = PMS 165 C (RED)
- LEFT ARROW.....PMS 425 C.....(\*70% BLACK) = PMS PROCESS BLUE C
- RIGHT ARROW.....PMS 422 C.....(\*40% BLACK) = PMS 375 C (GREEN)

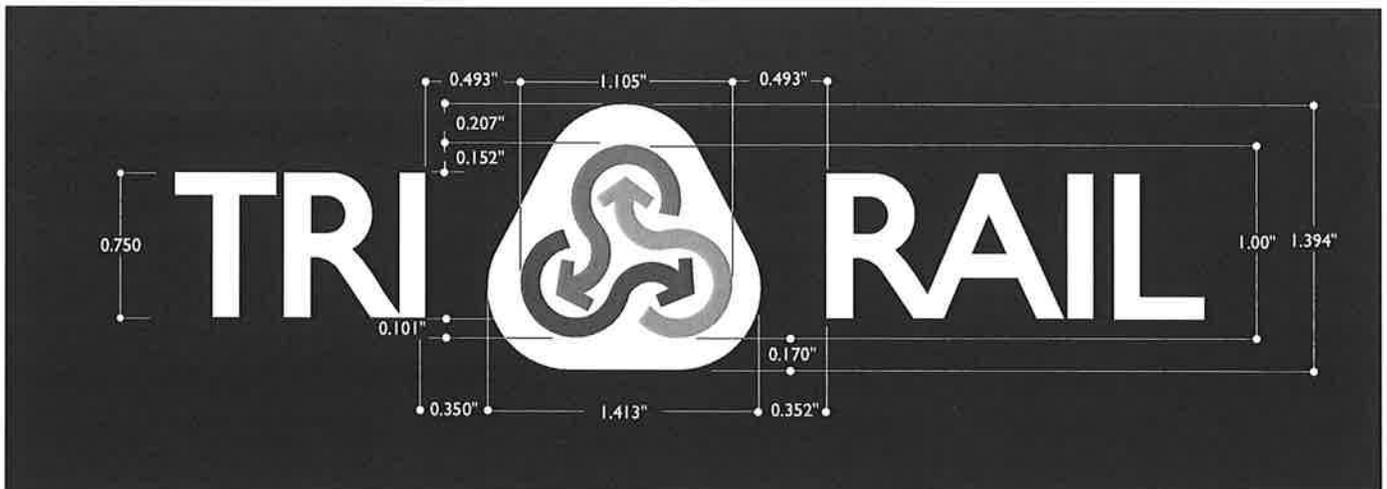

NOTE: ARROWS OF LOGOTYPE SHALL BE LARGER THAN TRI-RAIL LETTERING  
AND SHALL BE ALIGNED OFF CENTER TOWARD TOP WHEN APPEARING ON ONE LINE

SCALE: 1" = 1'-1"



**PANTONE MATCHING SYSTEM (PMS) NOTE:**

PANTONE (PMS) COLORS, SHOWN BELOW, ARE SOLID INK COLORS WHICH ARE PRE-MIXED AND PRINTED AS SOLID COLORS. ALL COLORS SHOULD BE MATCHED TO THESE PRINTED PMS COLOR BANDS.

IN PRINTING FOUR COLOR PROCESS (AS ON MOST INK JET PRINTERS AND COLOR COPIERS) THE PANTONE COLORS ARE CONVERTED TO THE (CMYK) PROCESS WHICH CONSISTS OF FOUR INDIVIDUAL INKS NAMED CYAN, MAGENTA, YELLOW AND BLACK. THE INKS ARE USED IN COMBINATION TO CREATE THE CLOSEST COLOR MATCH TO THE ORIGINAL PMS SOLID COLORS.

EXACT COLOR MATCH ON COLOR COPIERS OR INK JET PRINTERS WILL VARY DEPENDING UPON THE PRINTER, CALLIBRATION OF PRINTER AND AMOUNT OF THE FOUR COLOR INKS WHICH ARE APPLIED.



**PMS 315 C (TEAL)**



**PMS 165 C (RED)**



**PMS PROCESS BLUE C (BLUE)**



**PMS 375 C (GREEN)**

# TRI-RAIL BLACK AND WHITE PANTONE MATCHING SYSTEM

\* INDICATES PERCENT OF BLACK (MATCHING PMS COLORS) FOR ONE COLOR PRINTING



PMS BLACK C (BLACK).....(\*100% BLACK) = PMS 315 C (TEAL)



PMS 425 C (GREY).....(\*70% BLACK) = PMS PROCESS BLUE C (BLUE)



PMS 423 C (GREY).....(\*55% BLACK) = PMS 165 C (RED)




PMS 422 C (GREY).....(\*40% BLACK) = PMS 375 C (GREEN)

ABCDEFGHIJKLMN  
OPQRSTUVWXYZ  
1234567890,.-/\$(%)%  
abcdefghijklmnopqr  
stuvwxyz


ADOBE GILL SANS REGULAR

ABCDEFGHIJKLMN  
OPQRSTUVWXYZ  
1234567890,.-/\$(%)%  
abcdefghijklmnopqr  
stuvwxyz

ADOBE GILL SANS BOLD

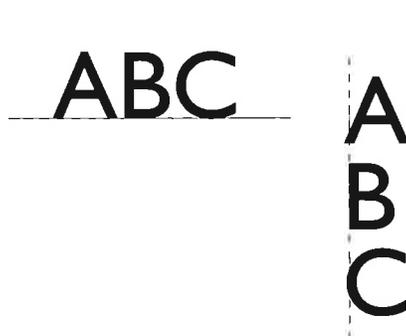

LETTERFORM BASELINES  
ANGLED AND CURVED FORMS  
PROTRUDE OVER BASELINE

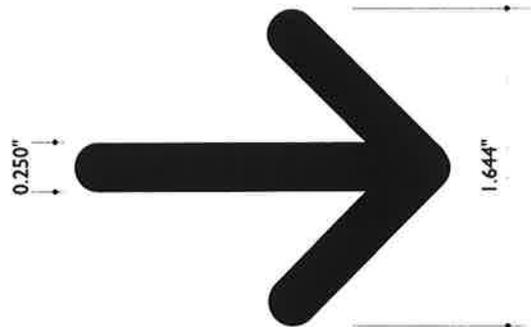

TRI-RAIL ARROW  
SCALE 1" = 1"



COMMUTER RAIL



BUS LANE



BUS STOP



TAXI STOP



DROP OFF / PICK UP



BICYCLE



ACCESSIBLE



WOMEN



MEN



RESTROOMS



ACCESSIBLE ELEVATOR



ELEVATOR



WATER FOUNTAIN



DO NOT ENTER



ENTER



NO PARKING



PARKING



INFORMATION



LOST AND FOUND



FIRST AID



TELEPHONE



TEXT TELEPHONE



HEARING ASSISTANCE




VOLUME CONTROL



EMERGENCY TELEPHONE



NO BICYCLES




BICYCLE PERMIT



ACCESSIBLE RAMP

TYPICAL INSTALLATION: TWO SIDED PYLON IDENTIFYING STATION AT ENTRY POINTS

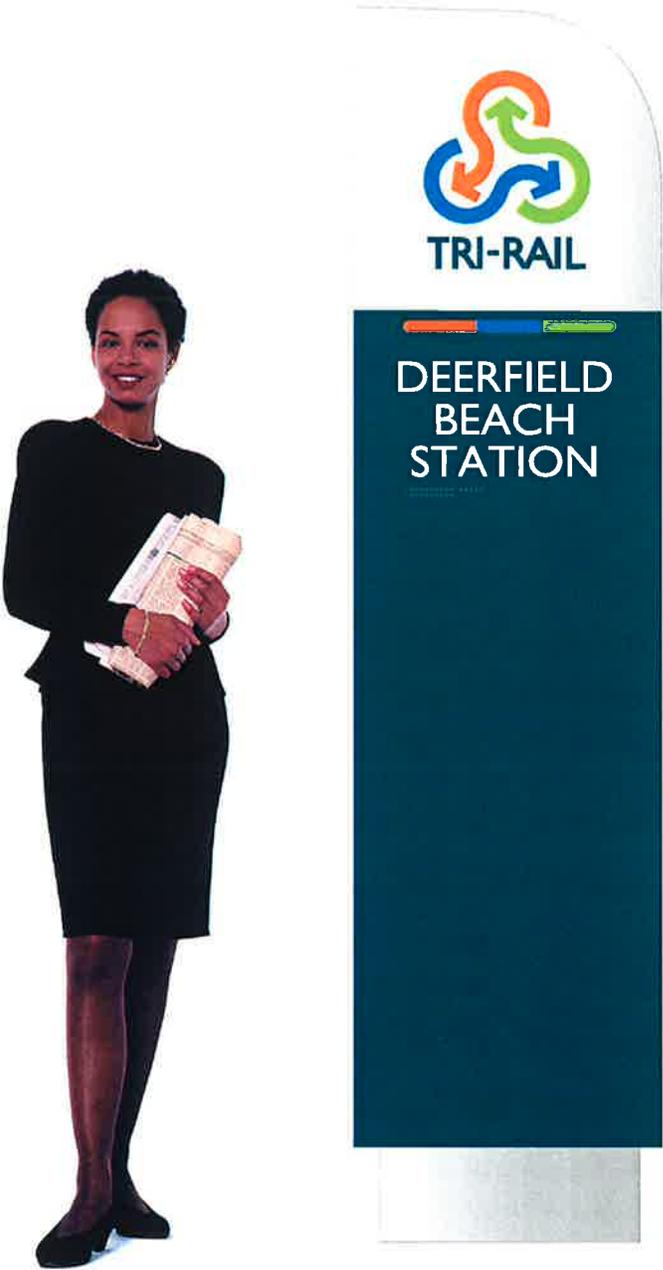


## TRI-RAIL STATION END CANOPY IDENTITY SIGNAGE

TYPICAL INSTALLATION: SIGNAGE MOUNTED ON EACH END OF STATION  
TO BE VIEWED FROM APPROACHING TRAIN



## TRI-RAIL STATION POST MOUNT SIGNAGE


TYPICAL INSTALLATION: POST MOUNT SIGNS AS 'AIRPORT SHUTTLE STOP', 'PASSENGER DROP-OFF AND PICK UP', 'PARKING', ETC.

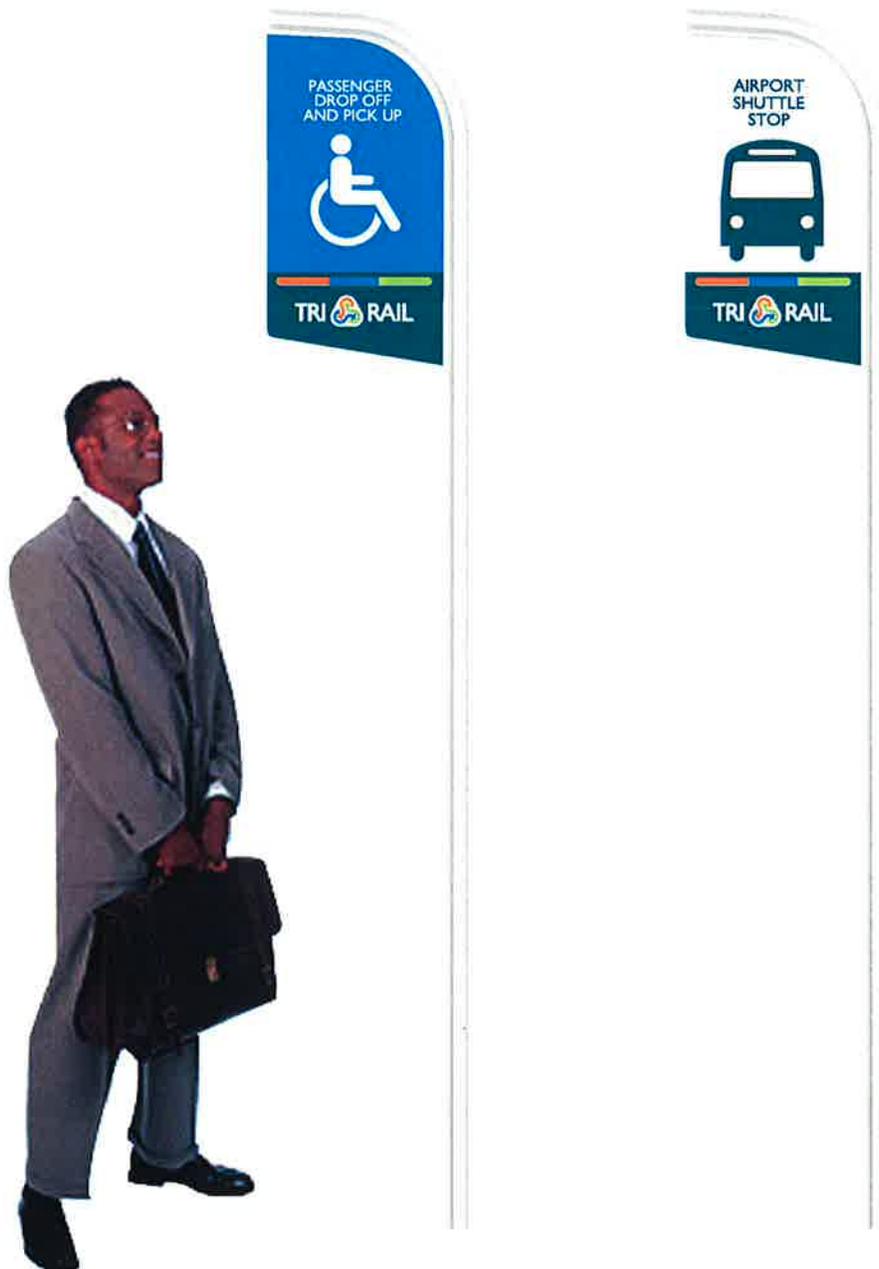

TYPICAL INSTALLATION: TWO SIDED LINE MAP.  
BLUE ARROWS AND LINES REPRESENT NORTHBOUND.  
RED ARROWS AND LINES REPRESENT SOUTHBOUND.  
LINE MAP WILL DISPLAY STATION NAMES AND LOCATION IN THE DIRECTION OF TRAVEL  
IN RELATIONSHIP TO USER VIEW ON EITHER SIDE OF SIGN.  
TRI-RAIL SYMBOL AND BOLD FACE STATION NAME INDICATE 'YOU ARE HERE'.




**SIGN TYPE PY PYLON**

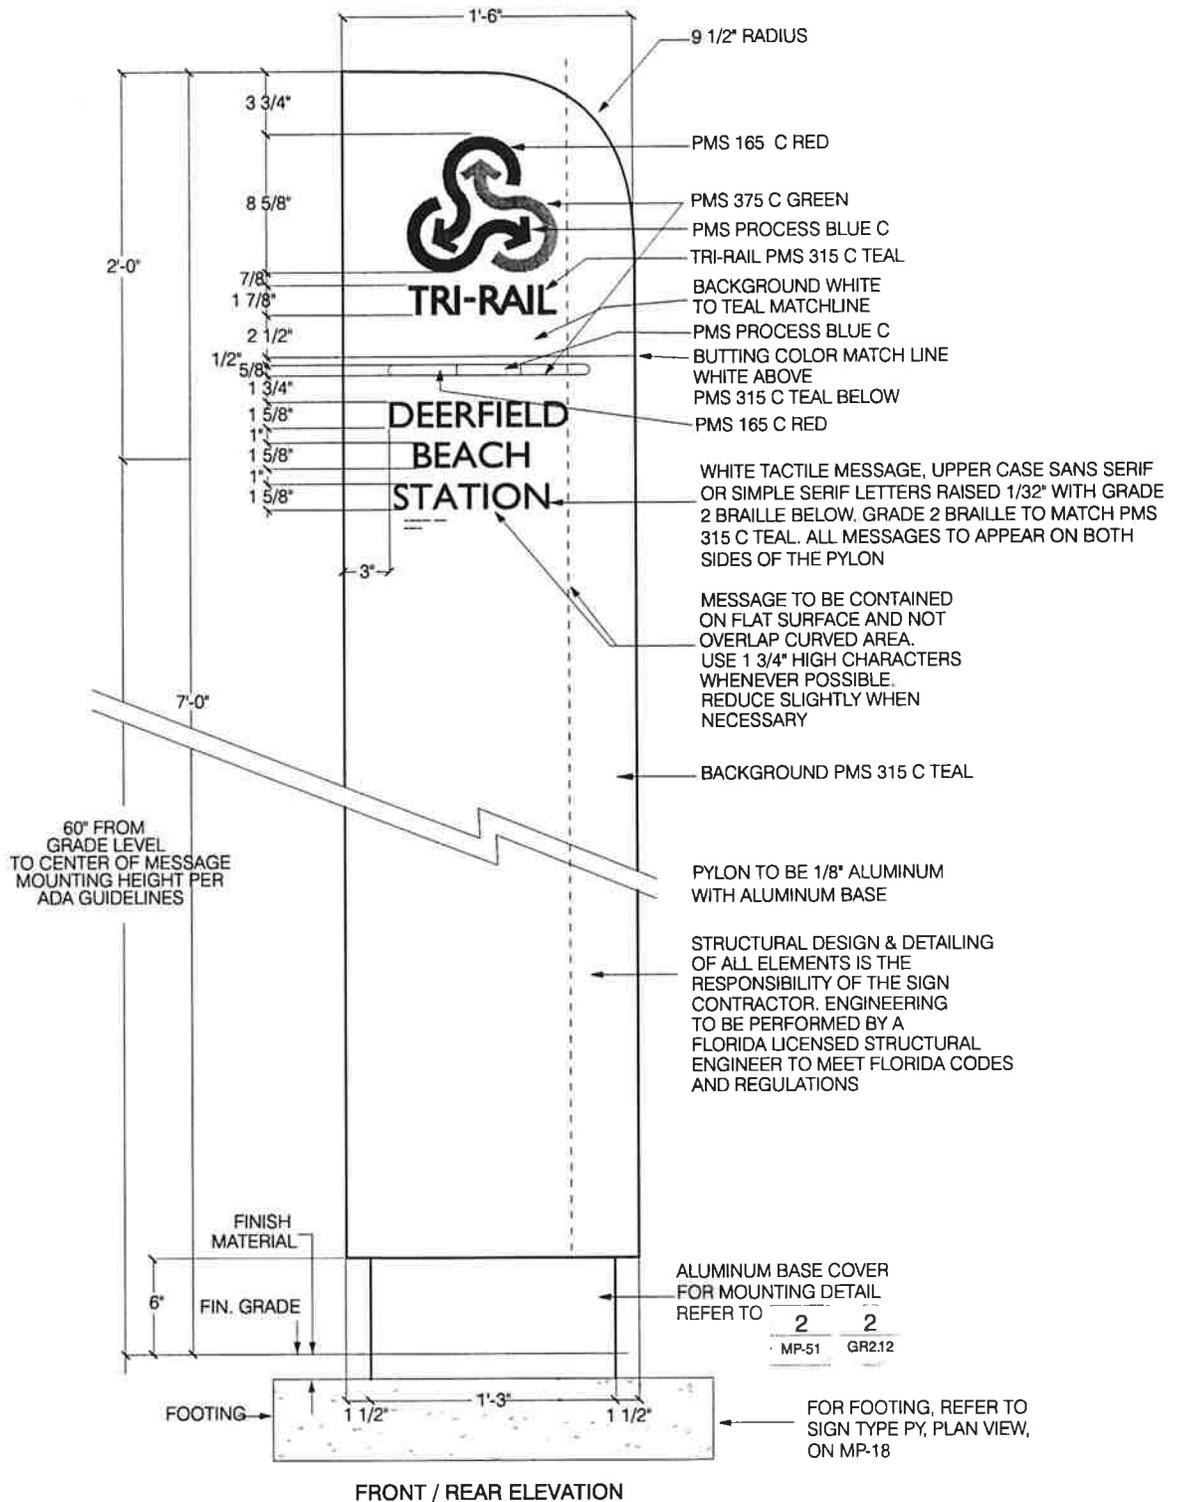

SCALE: 1" = 1'-0"




**SIGN TYPE PY PYLON**

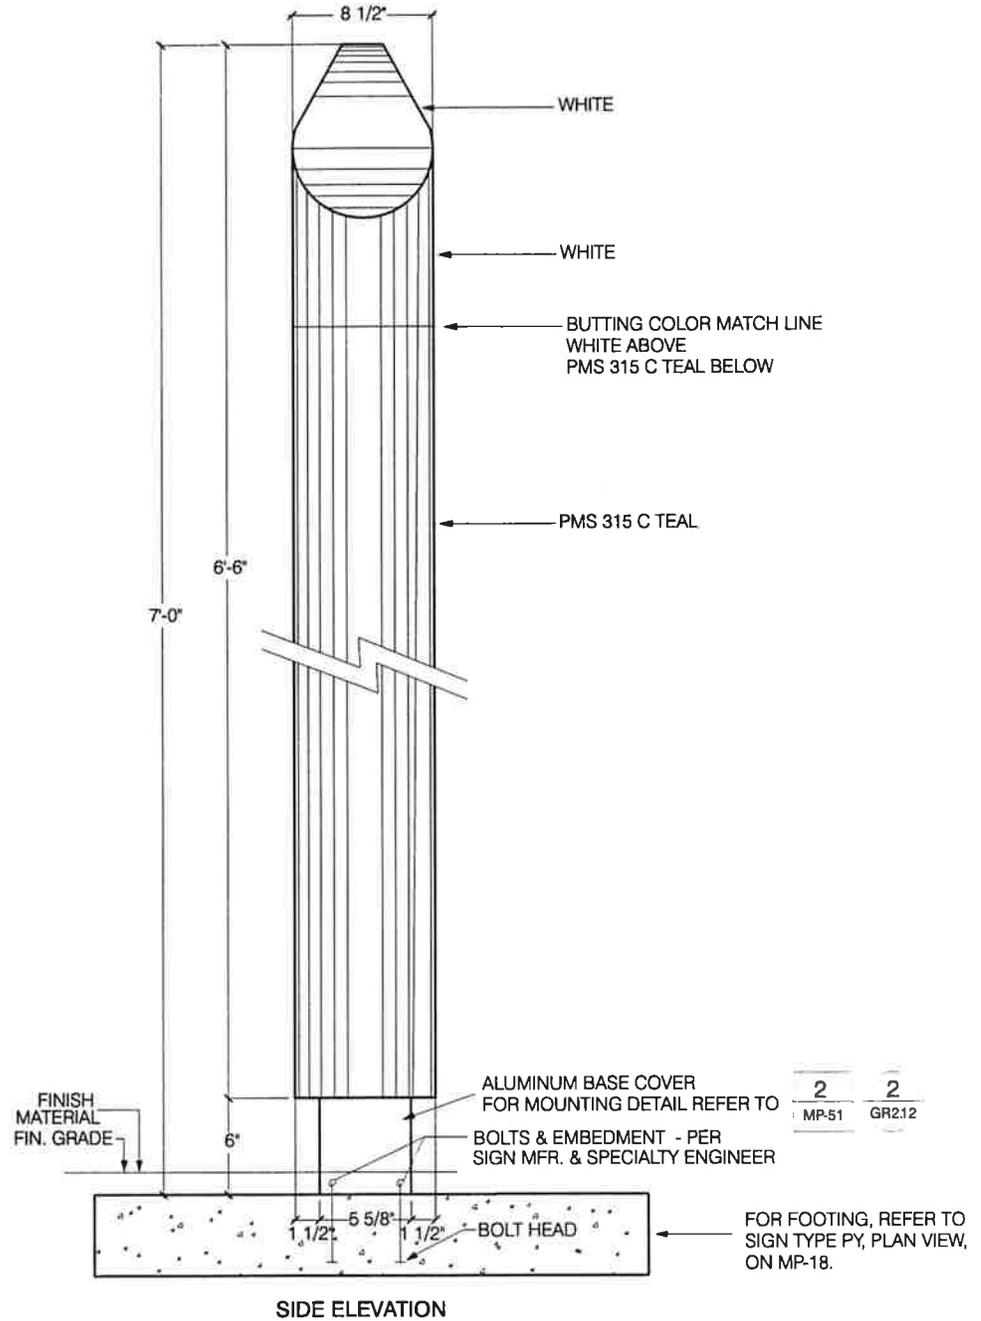

SCALE: 1" = 1'-0"



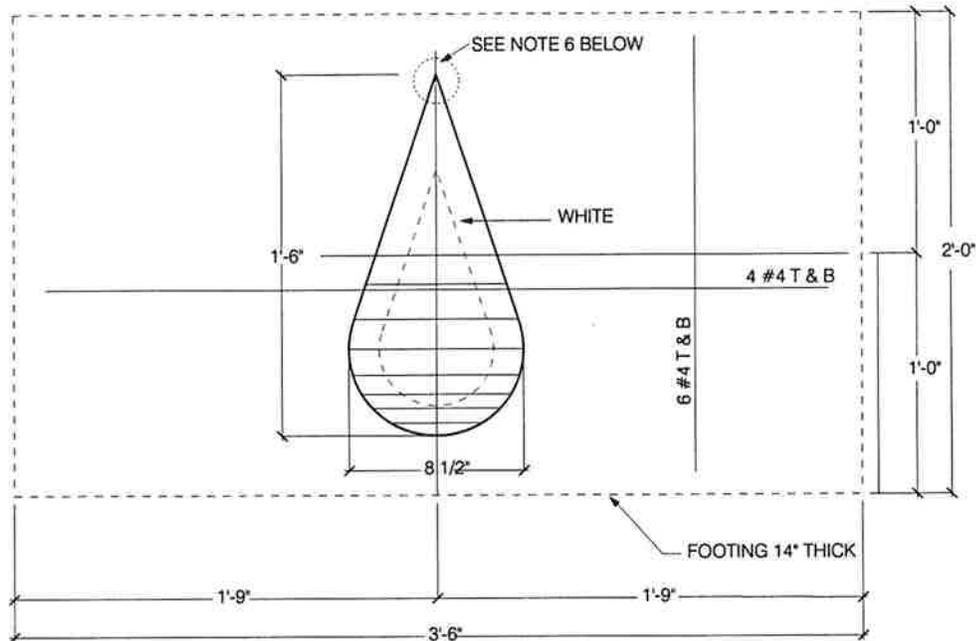


PLAN VIEW



## STRUCTURAL NOTES

1. CONCRETE STRENGTH AT 28 DAYS SHALL BE 4000 PSI WITH A MAXIMUM WATER/CEMENT RATIO OF 0.53. CONCRETE SLUMP SHALL BE 4" PLUS OR MINUS 1 INCH FOR DIRECT DISCHARGE OR PUMPING WITH A MINIMUM 4" DIAMETER HOSE. CONCRETE SLUMP FOR "PEA ROCK PUMP MIX" SHALL BE 6" PLUS OR MINUS 1 INCH FOR PUMPING WITH A 2" DIAMETER HOSE.
2. ALUMINUM SHAPES SHALL CONFORM TO 6061-T6 MILL FINISH.
3. APPLICABLE CODES AND STANDARDS INCLUDE:
  - STANDARD BUILDING CODE (PALM BEACH COUNTY), SOUTH FLORIDA BUILDING CODE MIAMI-DADE OR BROWARD EDITION, AS APPLICABLE
  - ACI 318 - BUILDING CODE REQUIREMENTS FOR STRUCTURAL CONCRETE
  - ACI 301 - STANDARD SPECIFICATIONS FOR STRUCTURAL CONCRETE
  - AWS D1.2.97 STRUCTURAL WELDING CODE - ALUMINUM
  - ASCE 7-93 MINIMUM DESIGN LOADS FOR BUILDINGS AND OTHER STRUCTURES.
4. STAINLESS STEEL BOLTS SHALL COMPLY WITH ASTM F593, ALLOY 303. NUTS SHALL COMPLY WITH ASTM F594.
5. WIND DESIGN PARAMETERS - ASCE 7-95:
  - VELOCITY = 150 MPH
  - I = 0.87
  - EXPOSURE "C"
6. MAINTAIN CONTINUOUS WELD TO MATCH ALUMINUM GROUND AND POLISHED PLATE FINISH PRIOR TO PAINTING. MAXIMUM RADIUS = 1/8"



NTS

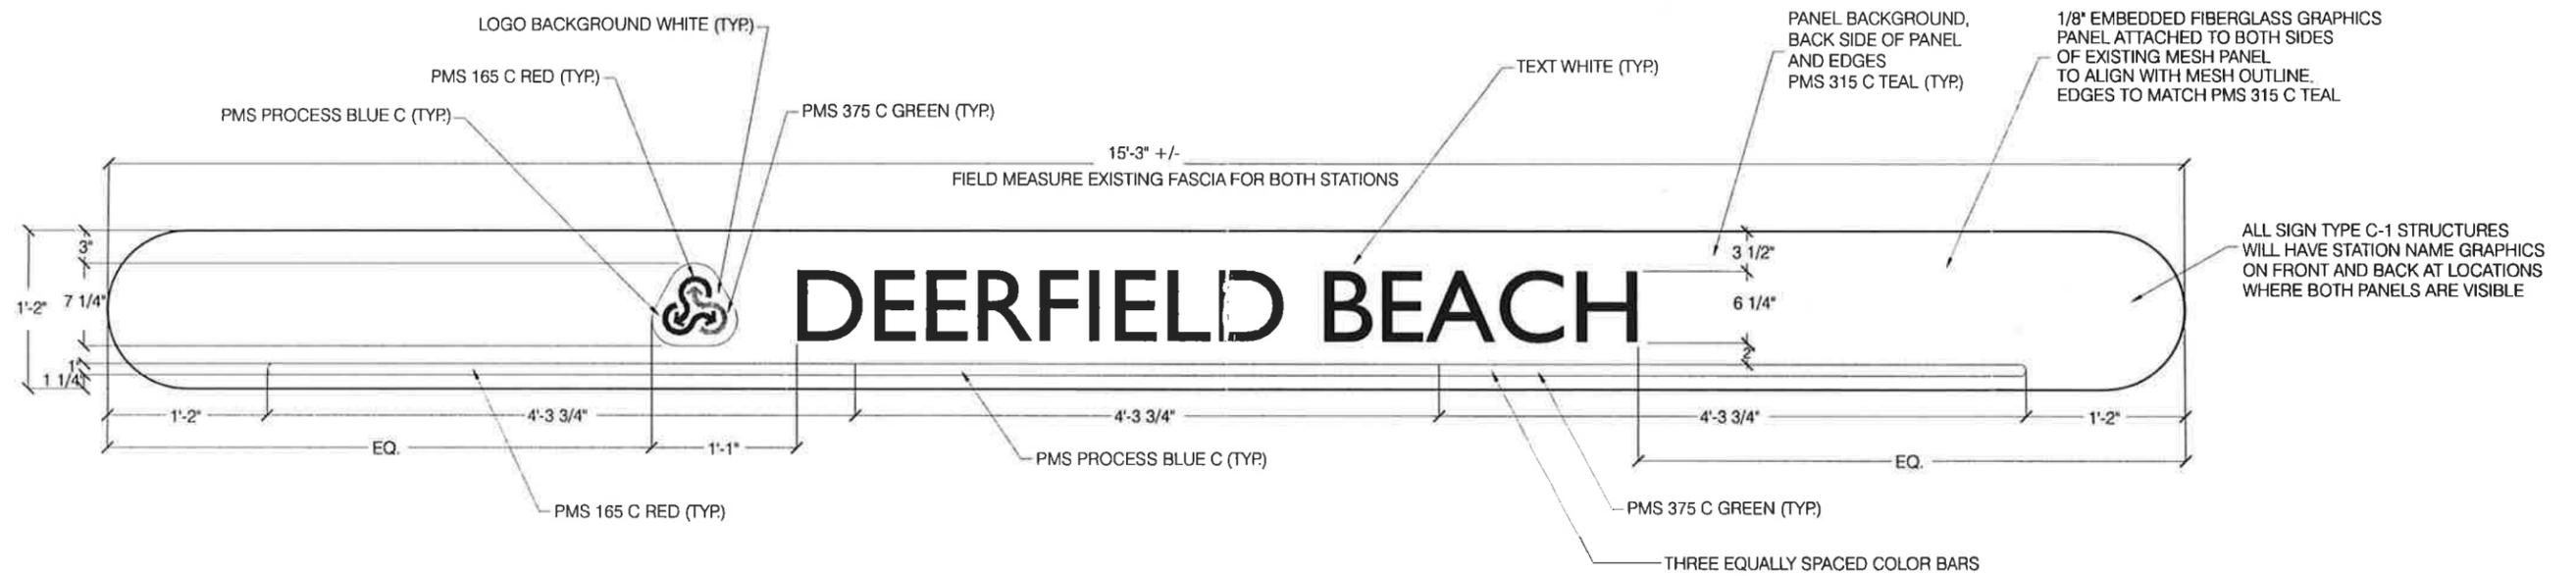

**SIGN TYPE C1 FOR DEERFIELD BEACH & MANGONIA PARK**  
MOUNT FIBERGLASS SIGN PANELS ONTO BOTH SIDES OF EXISTING STRUCTURAL MESH  
TO APPEAR LIKE A TWO-SIDED SIGN

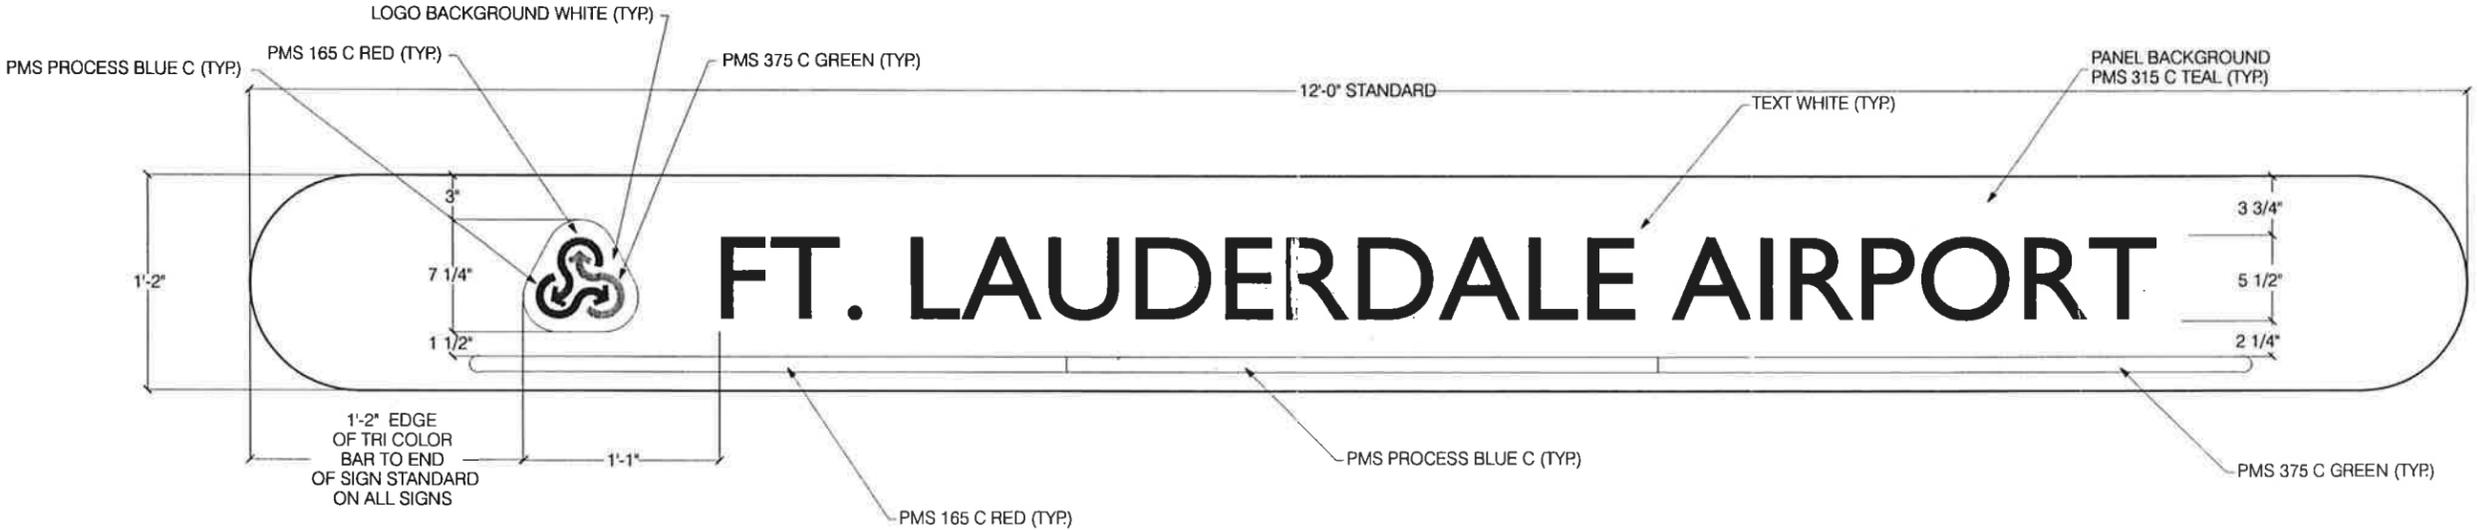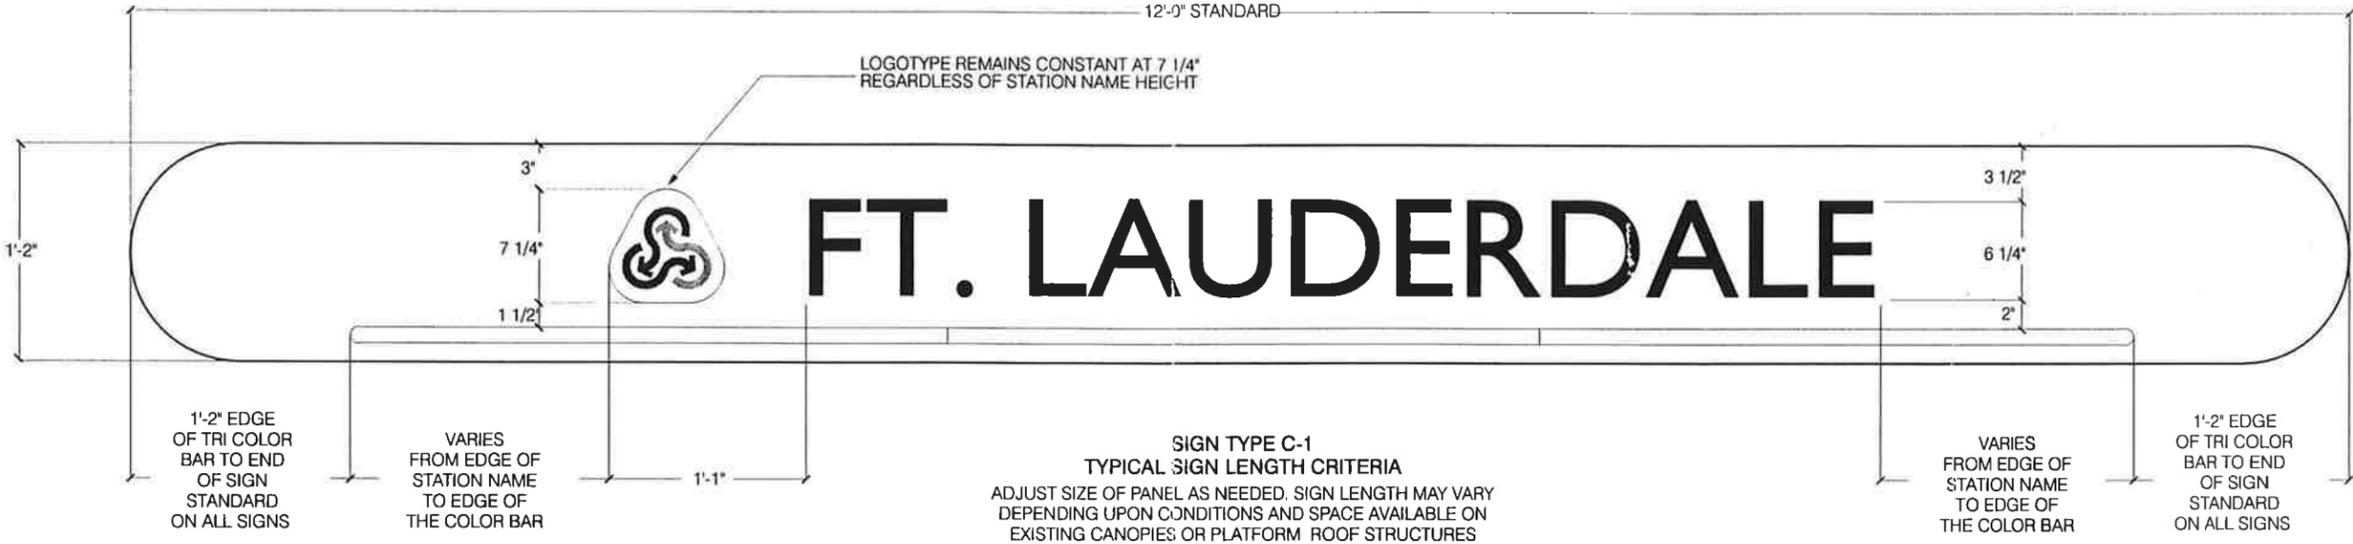

FOR CANOPY MOUNTED SIGNS REFER TO 11  
MP-53 11  
GR213 FOR SUSPENDED SIGNS REFER TO 1  
MP-55 1  
GR214 FOR SIGNS 8'-0" OR LESS REFER TO C-2  
MP-21 C-2  
GR205

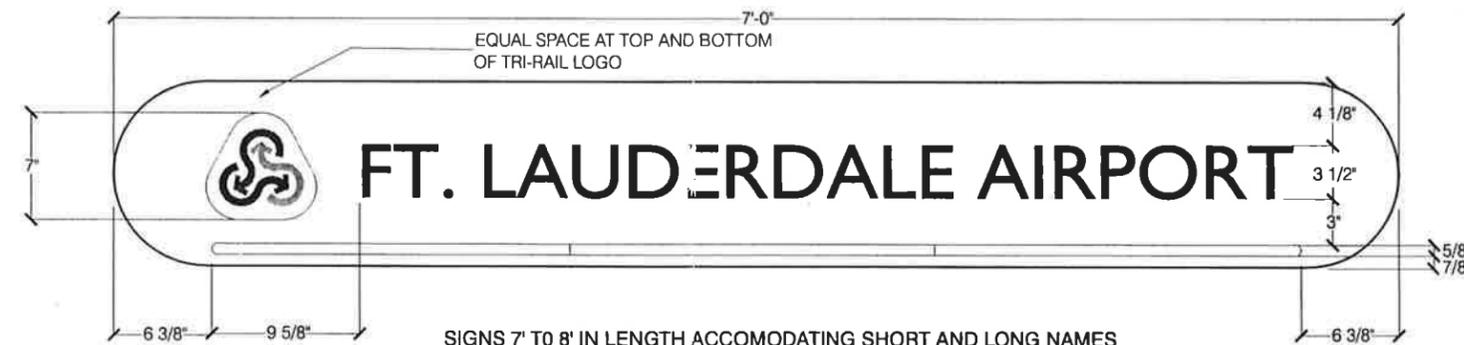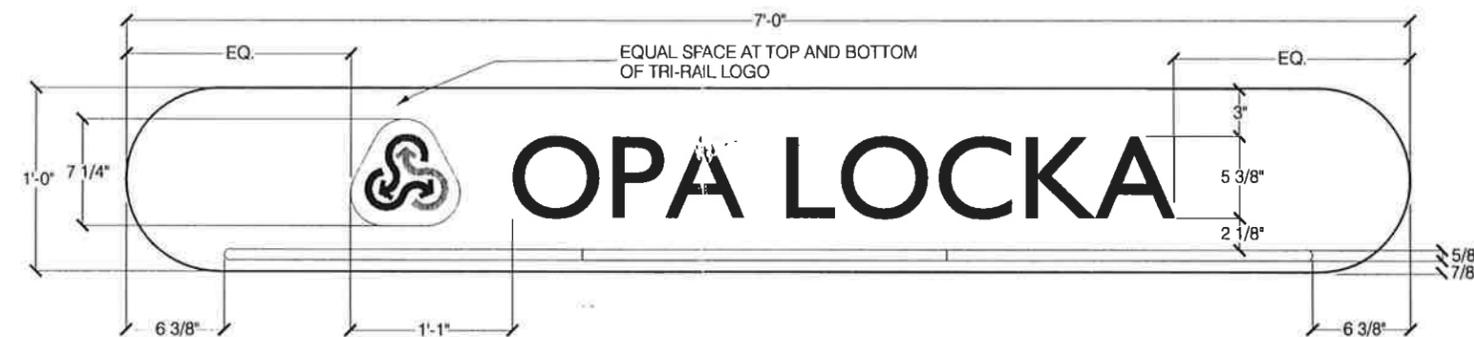

SIGNS 7' TO 8' IN LENGTH ACCOMODATING SHORT AND LONG NAMES

**SIGN TYPE C2, SHORT CANOPY SIGN (N&S)**  
 FIBERGLASS SIGN PANELS MOUNTED OR SUSPENDED FROM OVERHEAD CANOPY  
 SIGN WILL VARY IN LENGTH DEPENDING UPON STATION ARCHITECTURAL STRUCTURES  
 ABOVE SPACING GUIDES ARE INTENDED AS GUIDES AND MESSAGES WILL VARY UPON LENGTH OF MESSAGE  
 FINAL APPROVAL WILL BE SUBJECT TO TRI-RAIL REVIEW IN SHOP DRAWINGS

FOR CANOPY MOUNTED SIGNS REFER TO 

11	11
MP-53	GR213


FOR SUSPENDED SIGNS REFER TO 

1	1
MP-55	GR214

**SIGN TYPE C2 FOR DEERFIELD BEACH AND MANGONIA PARK**  
 FIBERGLASS SIGN PANELS MOUNT ONTO BOTH SIDES OF EXISTING STRUCTURAL MESH

SCALE: 1" = 1'0"



**SIGN TYPE FM-I FLAG MOUNT**

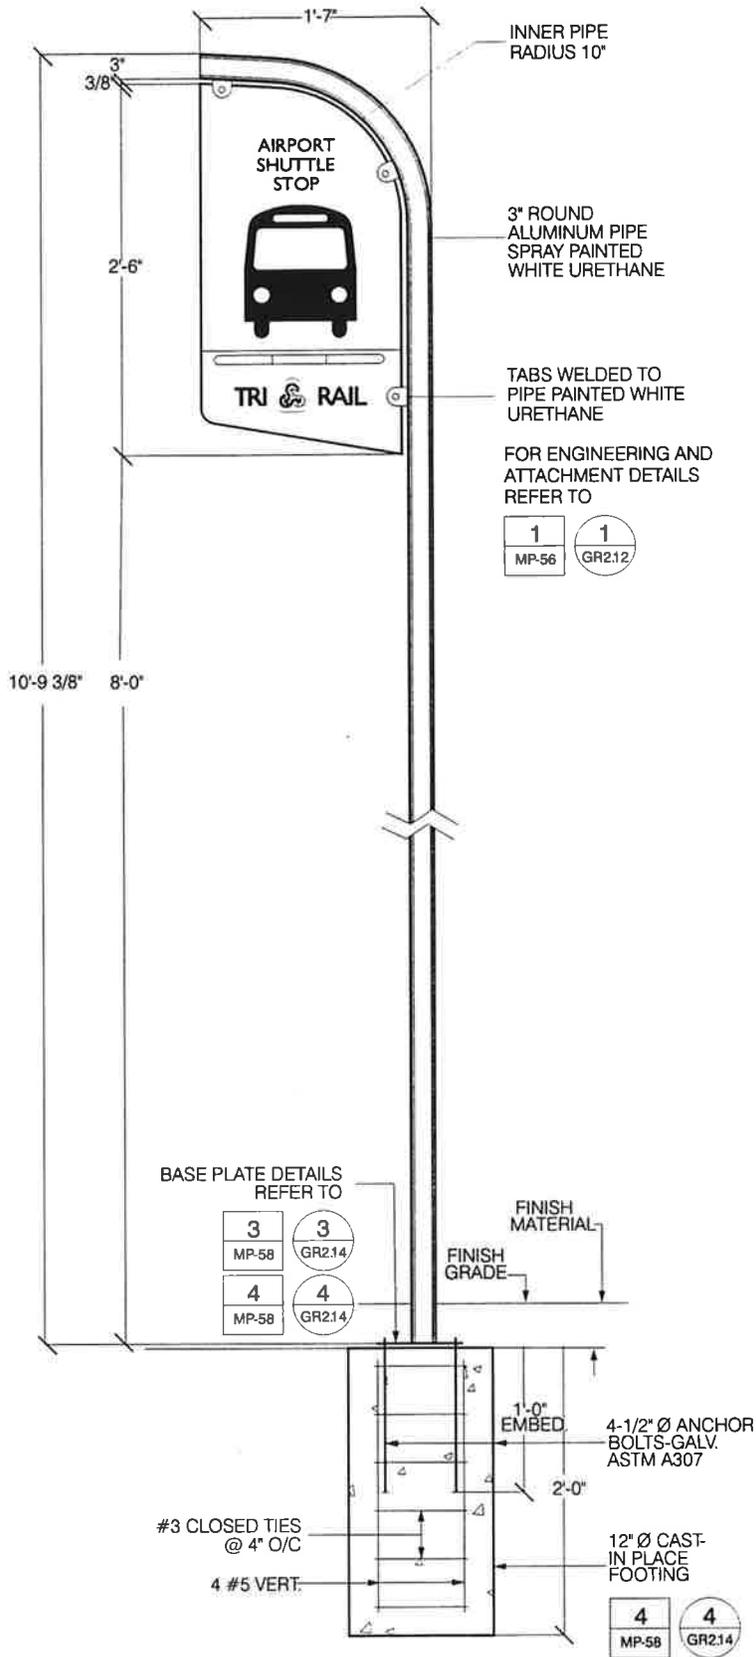

SCALE: 3/4" = 1'-0"





**SIGN TYPE FM-I PANELS**

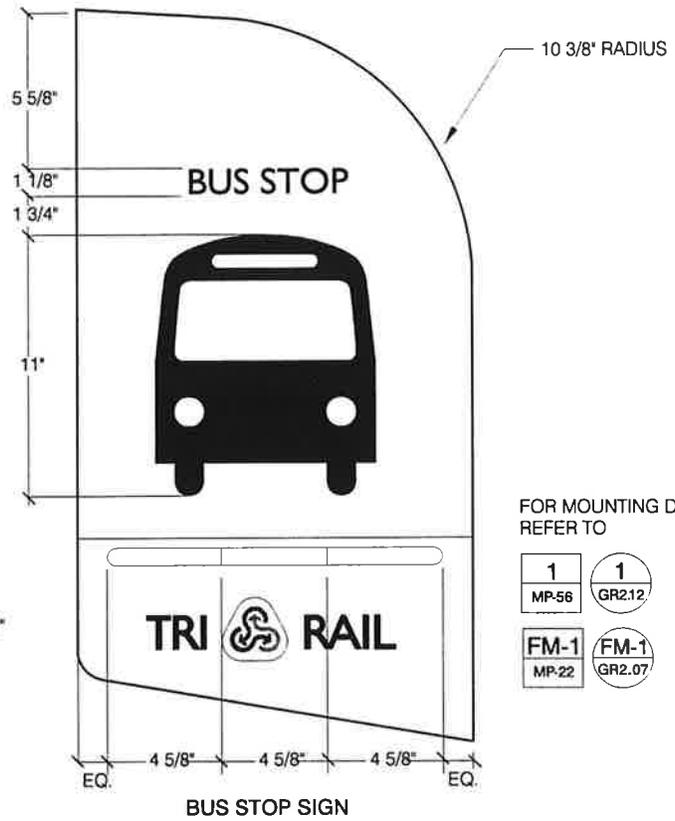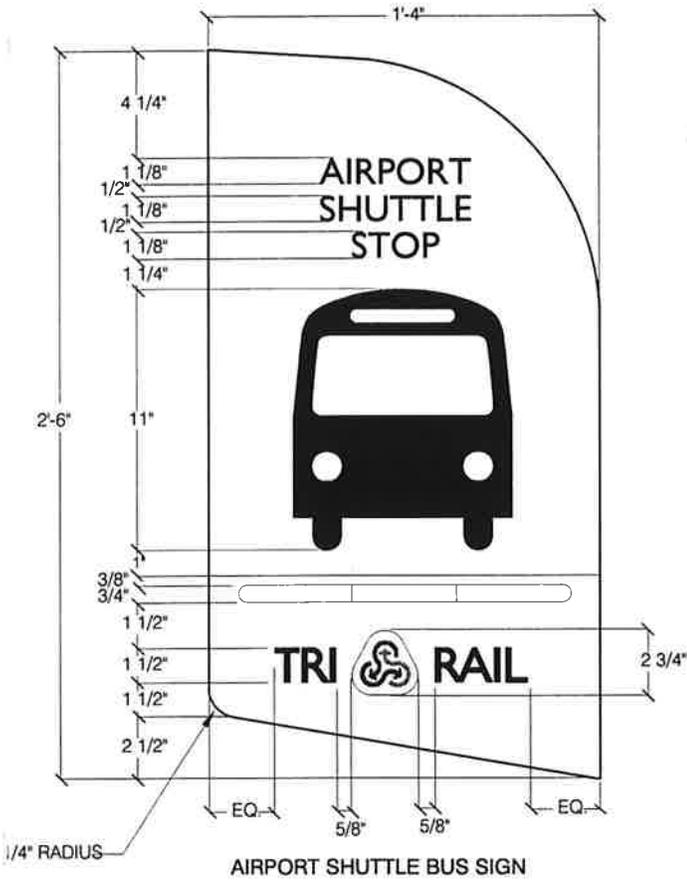

FOR MOUNTING DETAIL REFER TO


1 MP-56	1 GR2.12
FM-1 MP-22	FM-1 GR2.07

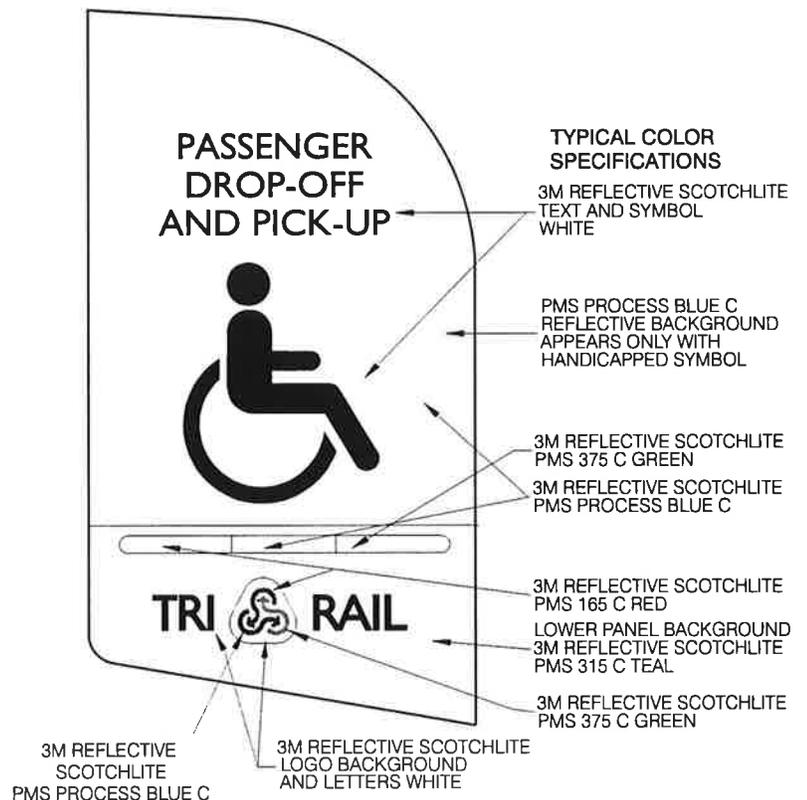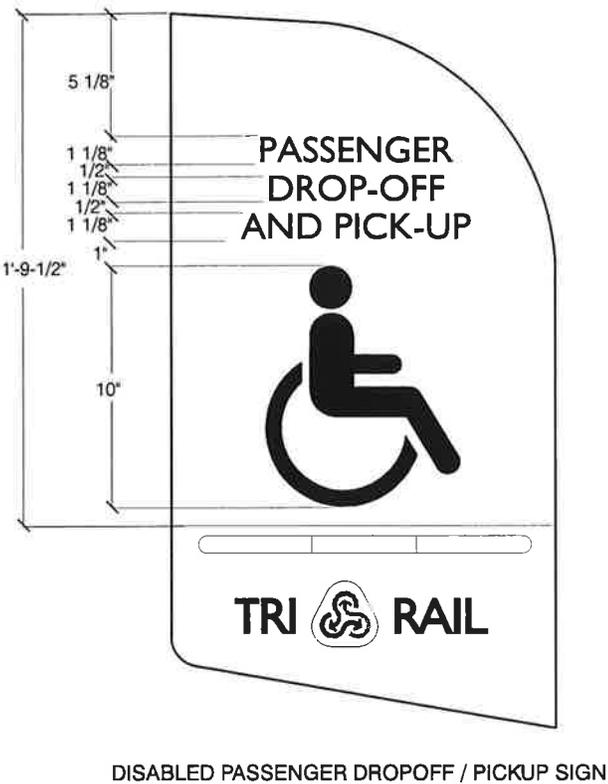

SCALE: 1-1/2" = 1'0"





**SIGN TYPE FM-1 PANELS**

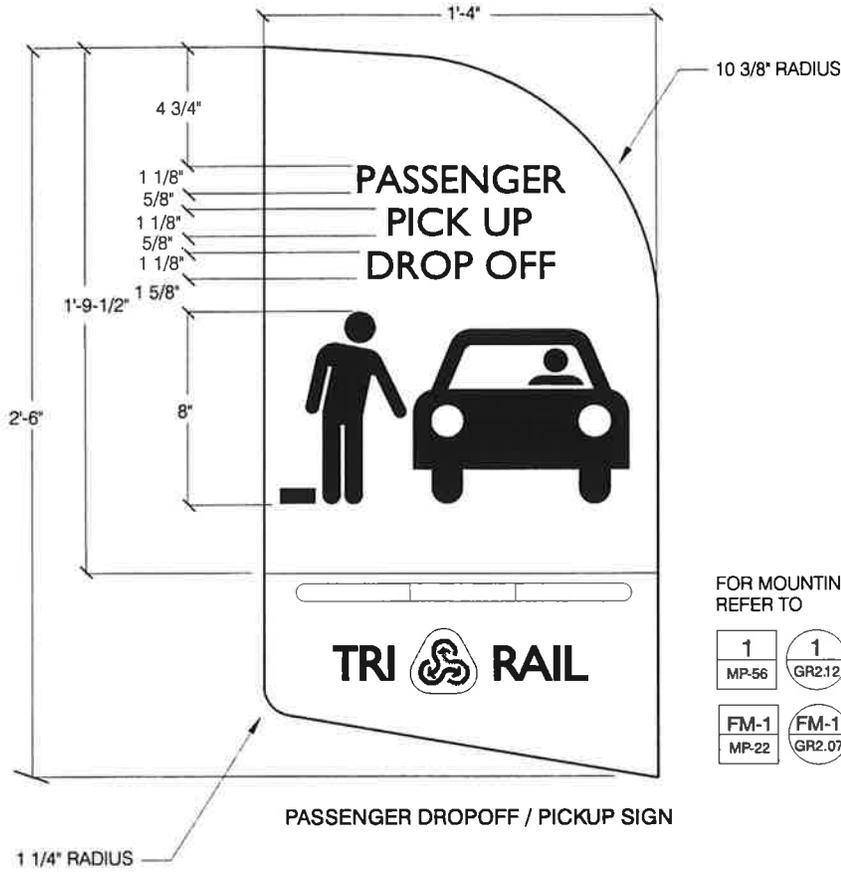

SCALE: 1-1/2" = 10'





**SIGN TYPE FM-I PANELS**

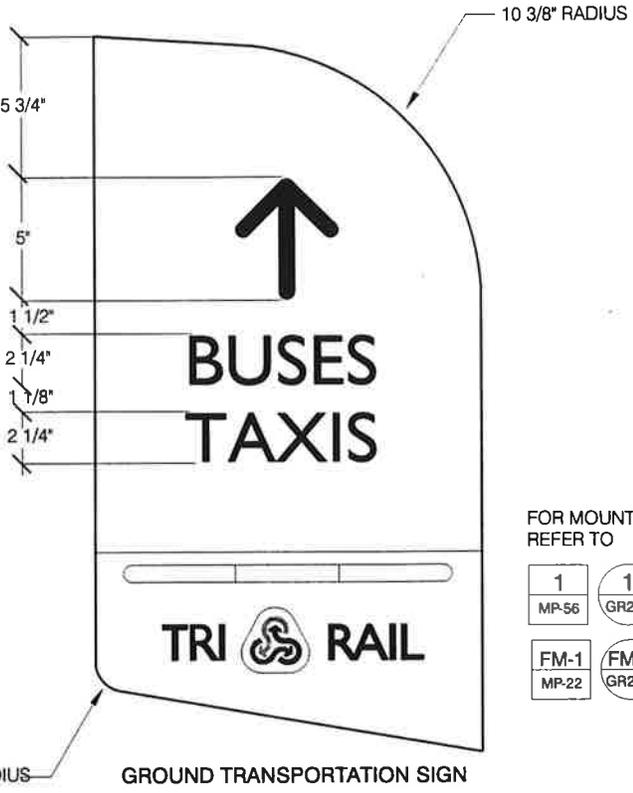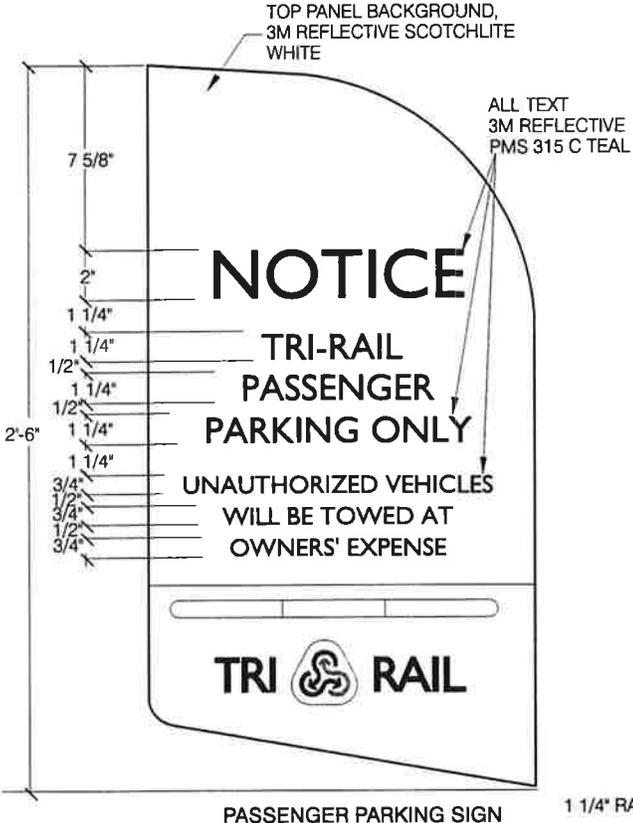

FOR MOUNTING DETAIL REFER TO





1 MP-56	1 GR2.12
FM-1 MP-22	FM-1 GR2.07

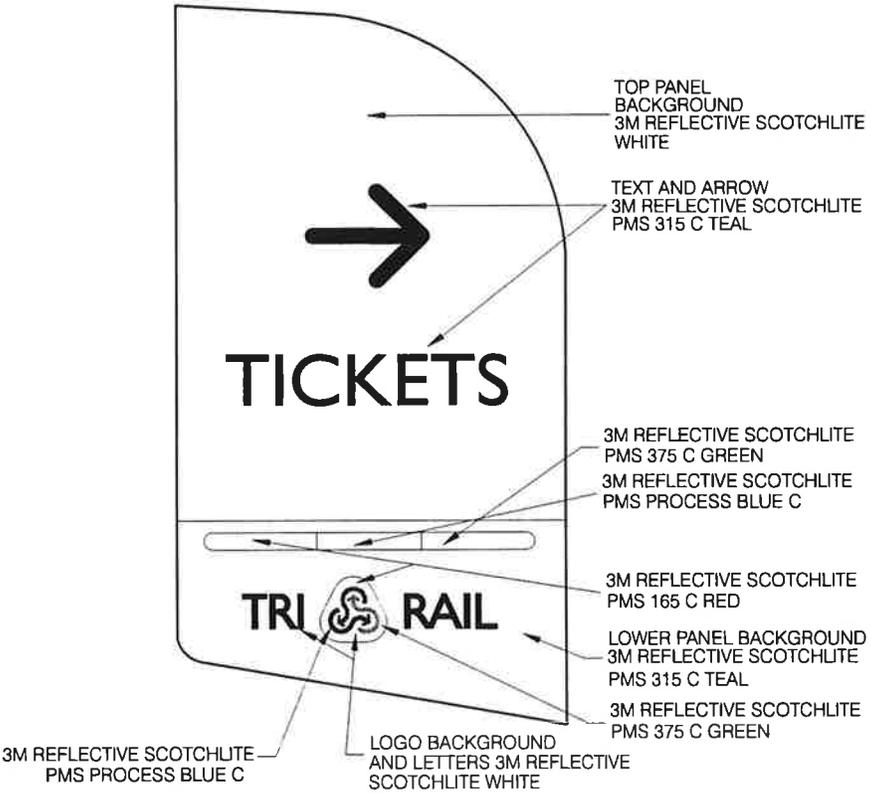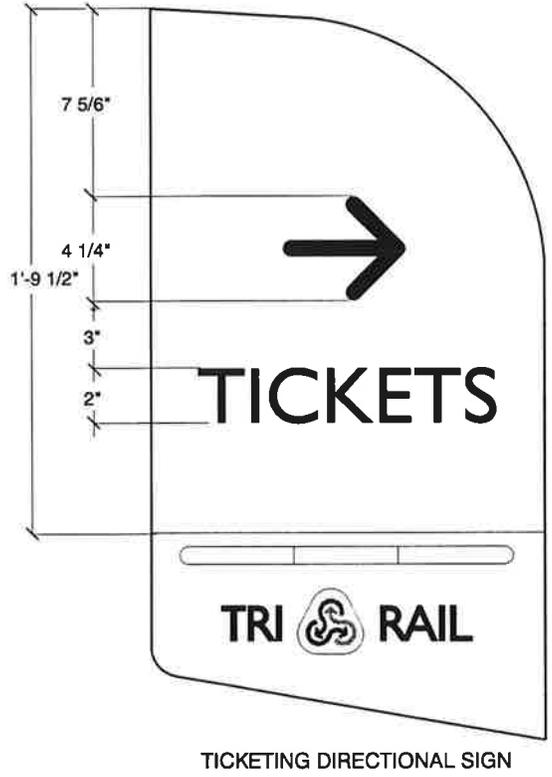

SCALE: 1-1/2" = 10'




**SIGN TYPE FM-1 PANELS**

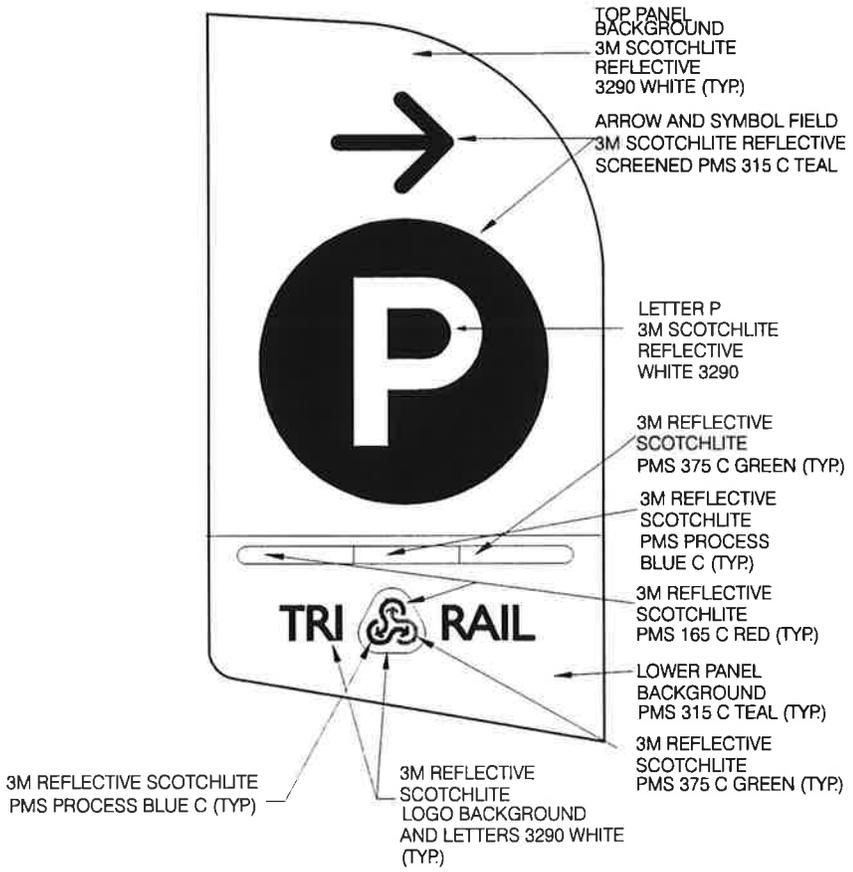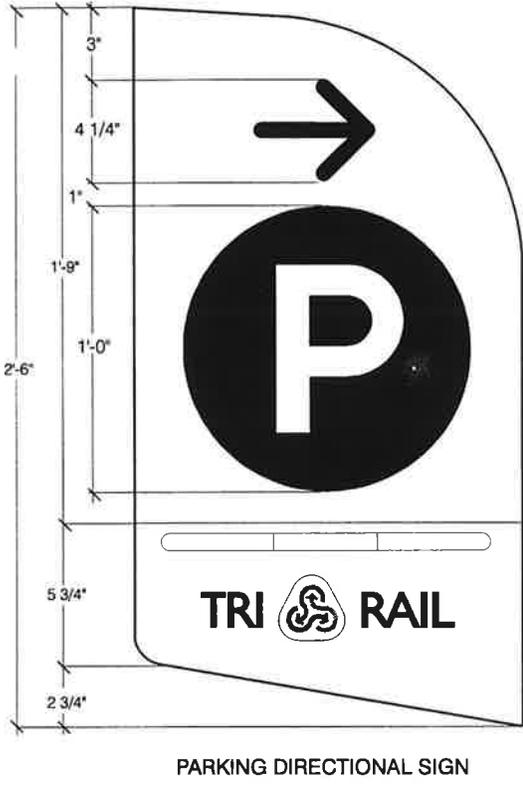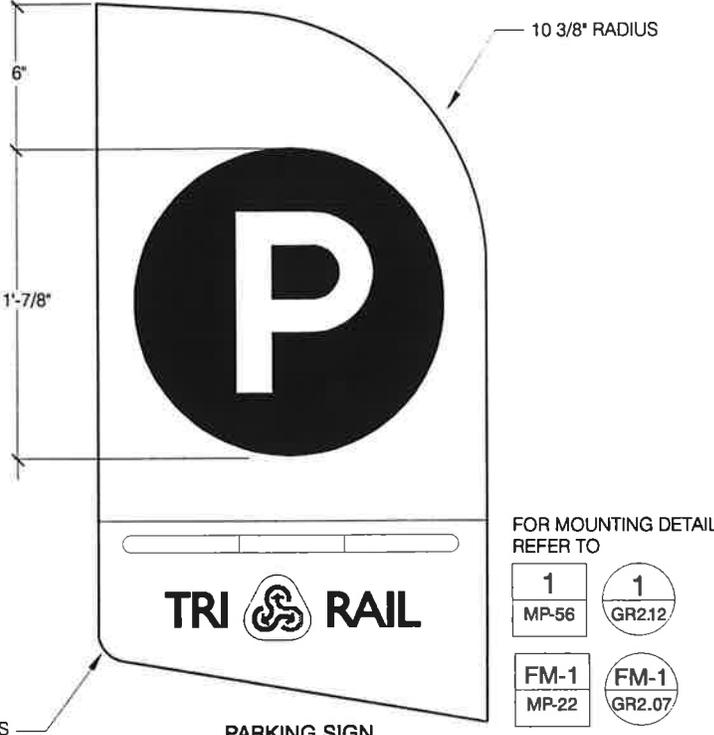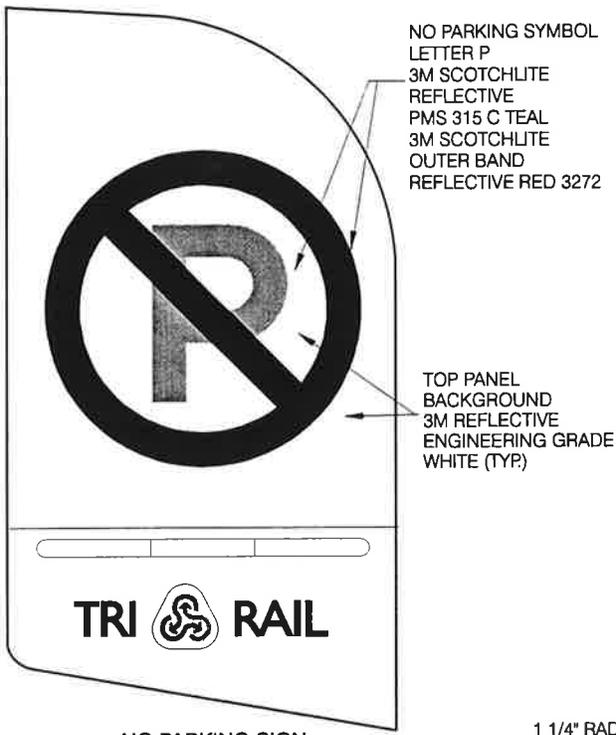


SCALE: 1-1/2" = 10"



**SIGN TYPE FM-2 FLAG MOUNT**

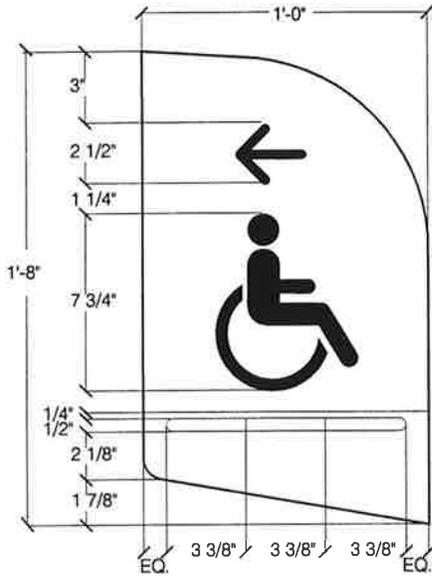


**WHEELCHAIR ACCESS**

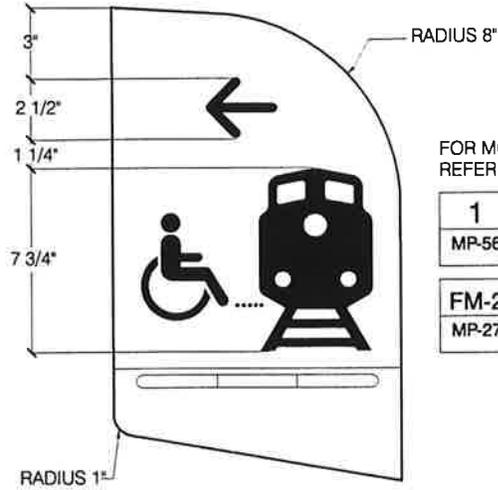


**WHEELCHAIR ACCESS TO TRAIN**

FOR MOUNTING DETAIL REFER TO

1 MP-56	1 GR2.12
FM-2 MP-27	FM-2 GR2.07

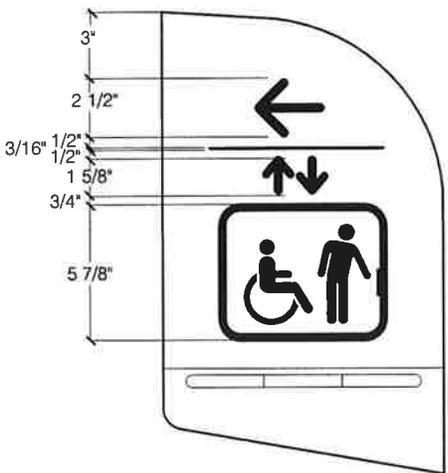

**WHEELCHAIR ACCESS ELEVATOR SIGN**


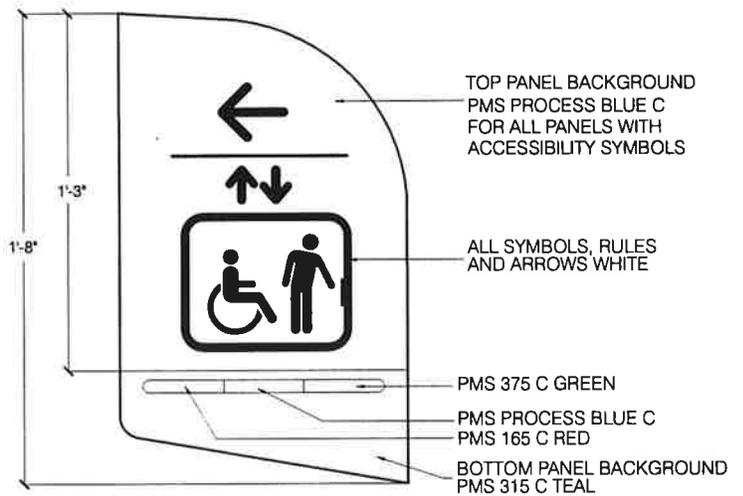


**TYPICAL DIMENSION AND PANEL COLOR SPECIFICATIONS**

SCALE: 1 1/2" = 1'-0"



**SIGN TYPE SID STATION IDENTITY**

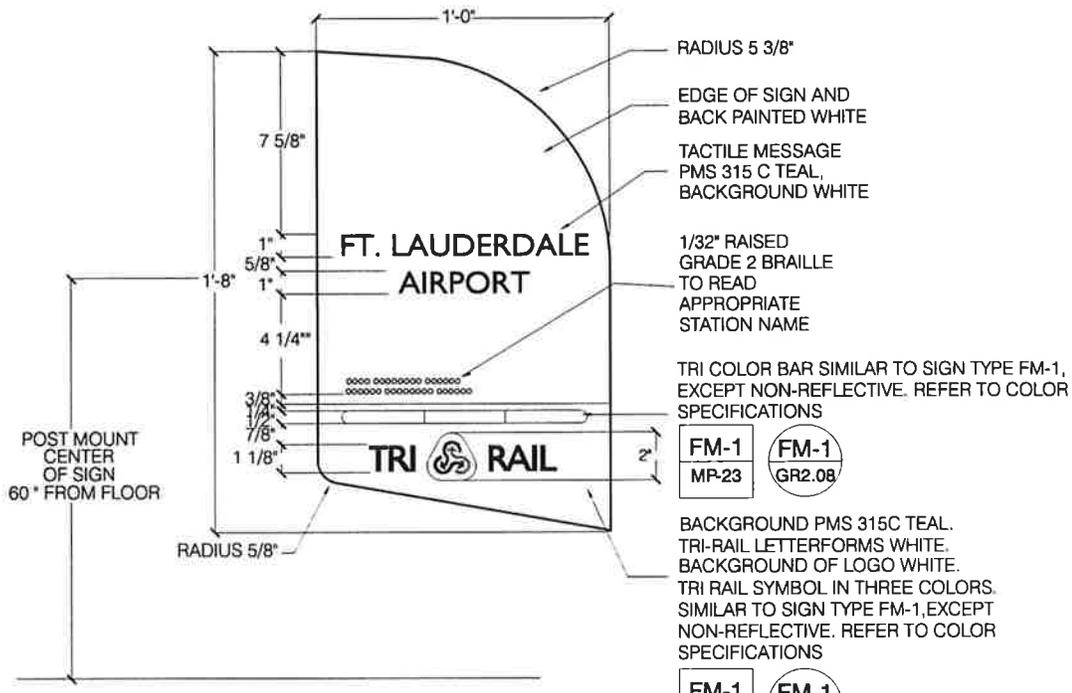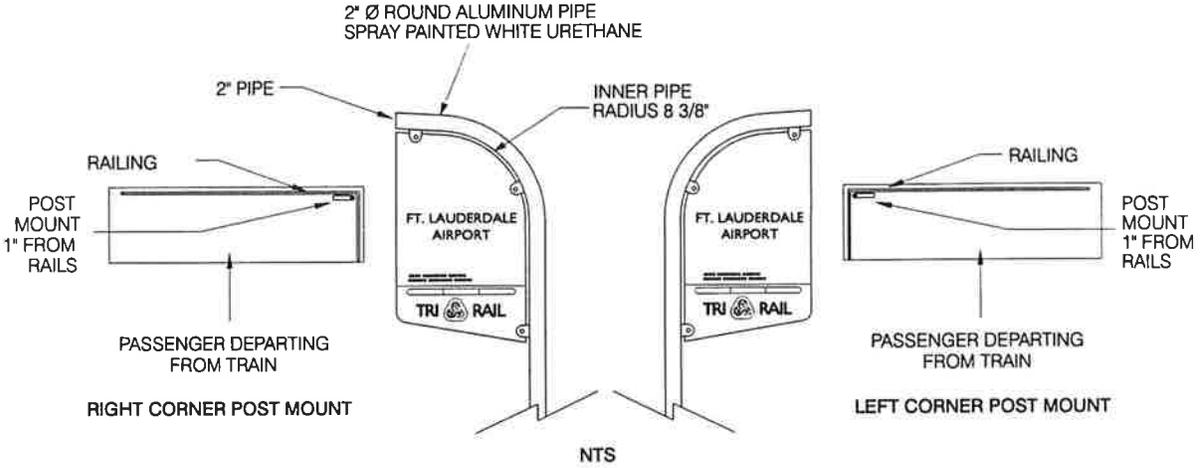

**STATION IDENTITY SIGNS AT MINI-HIGH RAMPS**

FM-1	FM-1
MP-23	GR2.08

FM-1	FM-1
MP-23	GR2.08


FM-2	FM-2
MP-27	GR2.07

1	1
MP-56	GR2.12

SCALE: 1-1/2" = 1'-0"



# SIGN TYPES KI, D KIOSK AND WALL MOUNT DIRECTORY

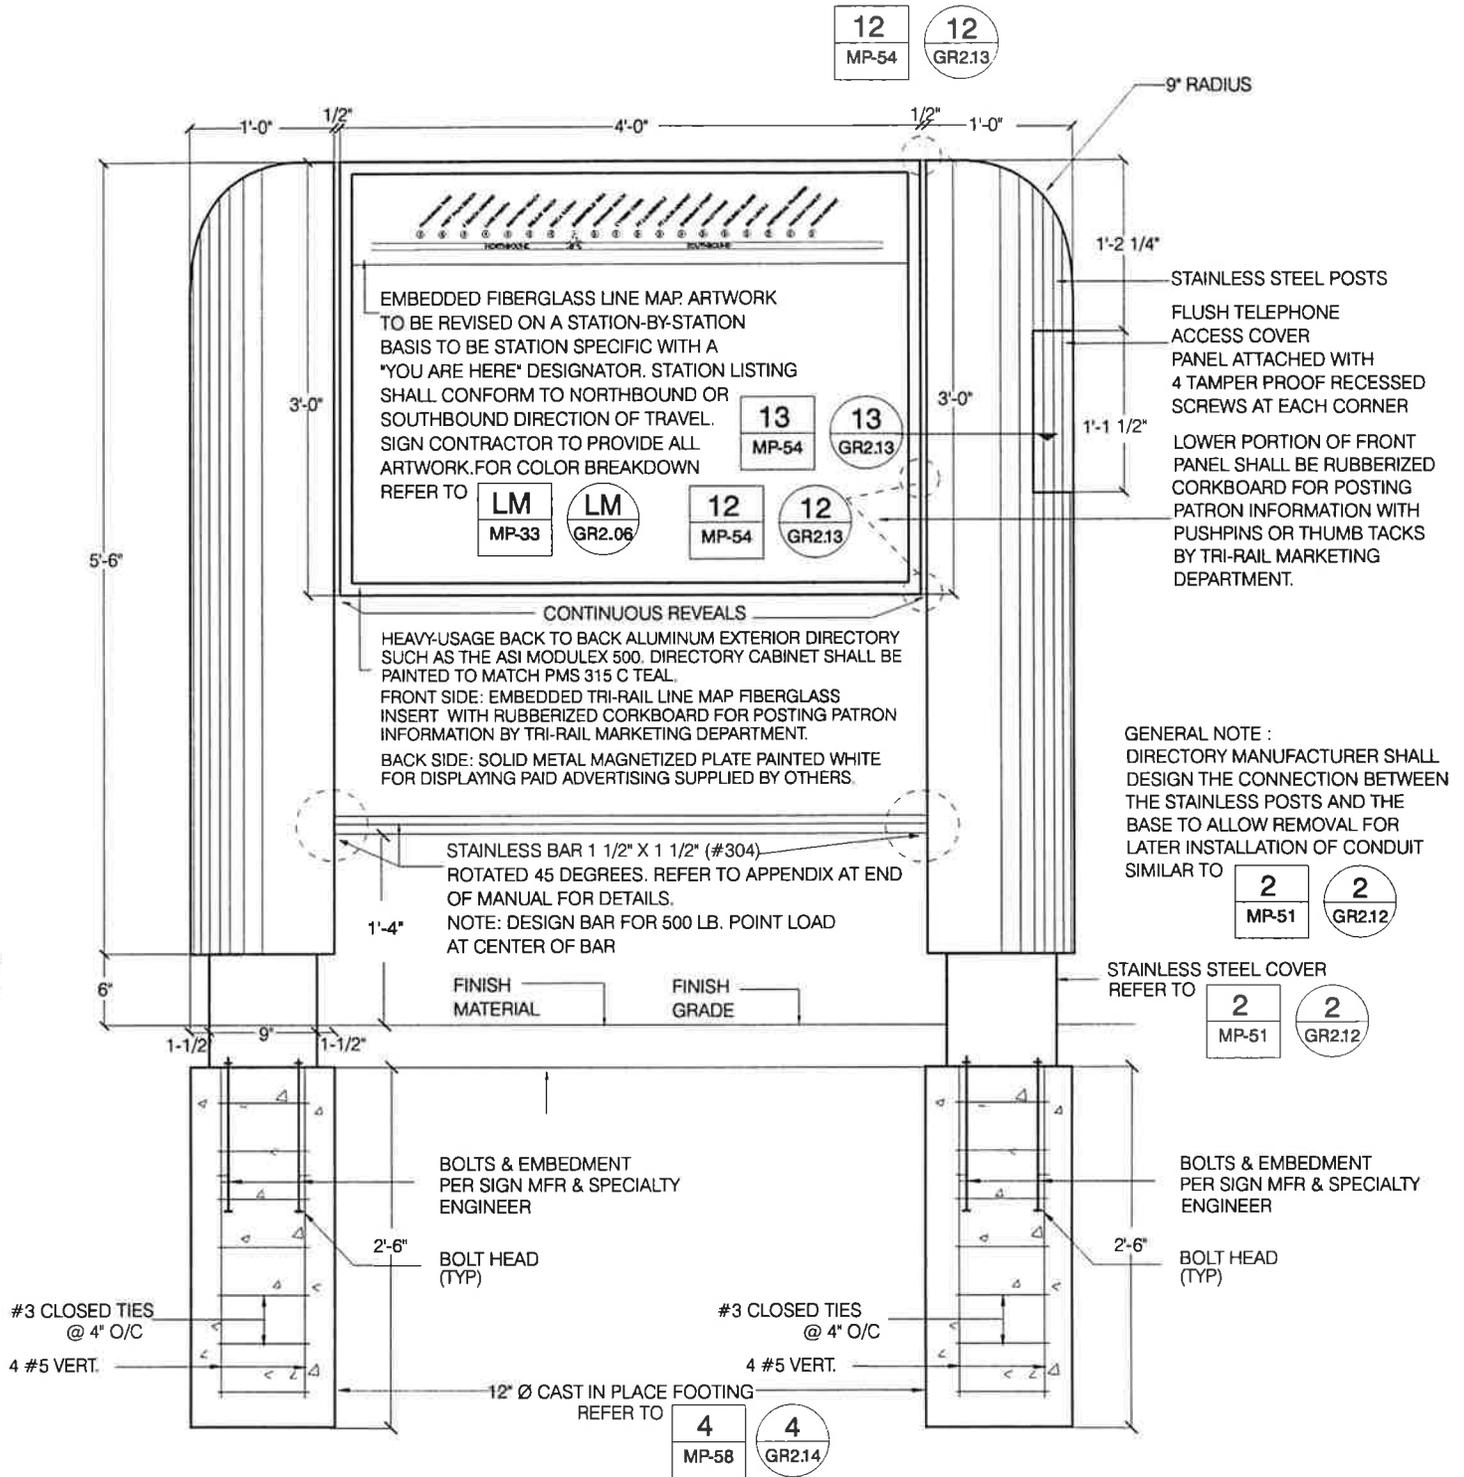


**SIGN TYPE KI:** POST MOUNTED DIRECTORY INFORMATION KIOSK  
**SIGN TYPE D:** WALL MOUNTED DIRECTORY INFORMATION CENTER  
 WALL MOUNTED HEAVY DUTY DIRECTORY. SAME PANEL CONFIGURATION AS SIGN TYPE KI BUT SINGLE SIDED WITHOUT POSTS

SCALE: 3/4" = 1'-0"




**GENERAL NOTE:**  
 DIRECTORY MANUFACTURER SHALL DESIGN THE CONNECTION BETWEEN THE STAINLESS POSTS AND THE BASE TO ALLOW REMOVAL FOR LATER INSTALLATION OF CONDUIT SIMILAR TO DETAIL 2 GR.2.10

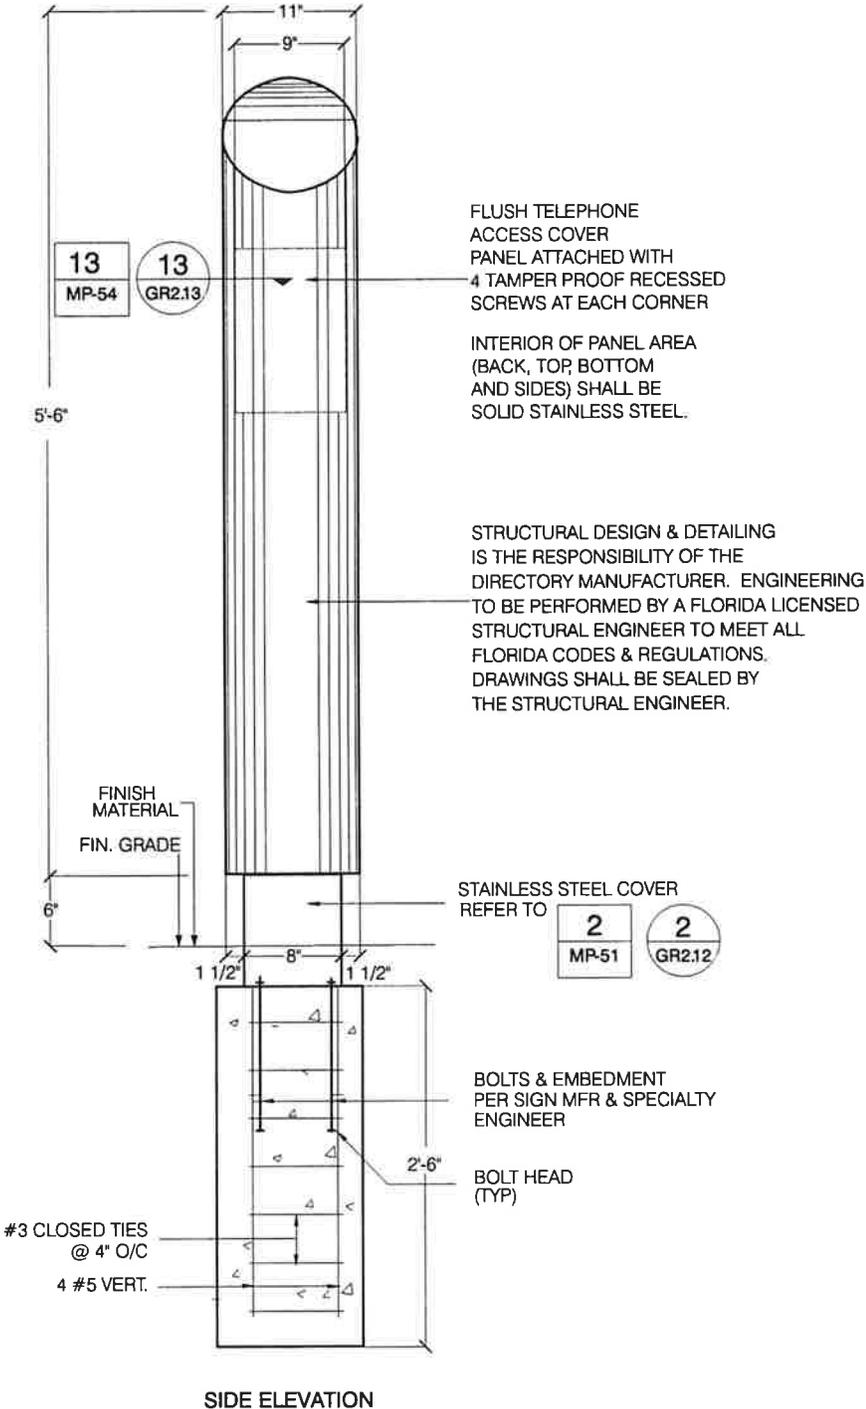

SIDE ELEVATION

SCALE: 3/4" = 1'-0"




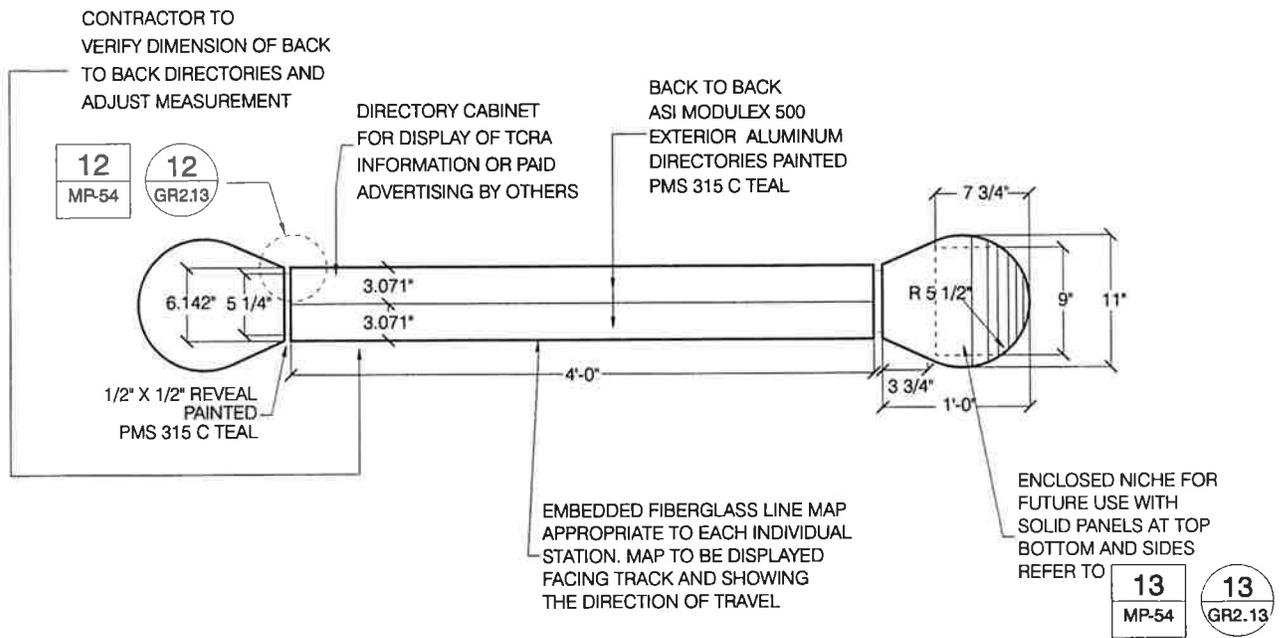

**PLAN VIEW**

SCALE 3/4" = 1'-0"




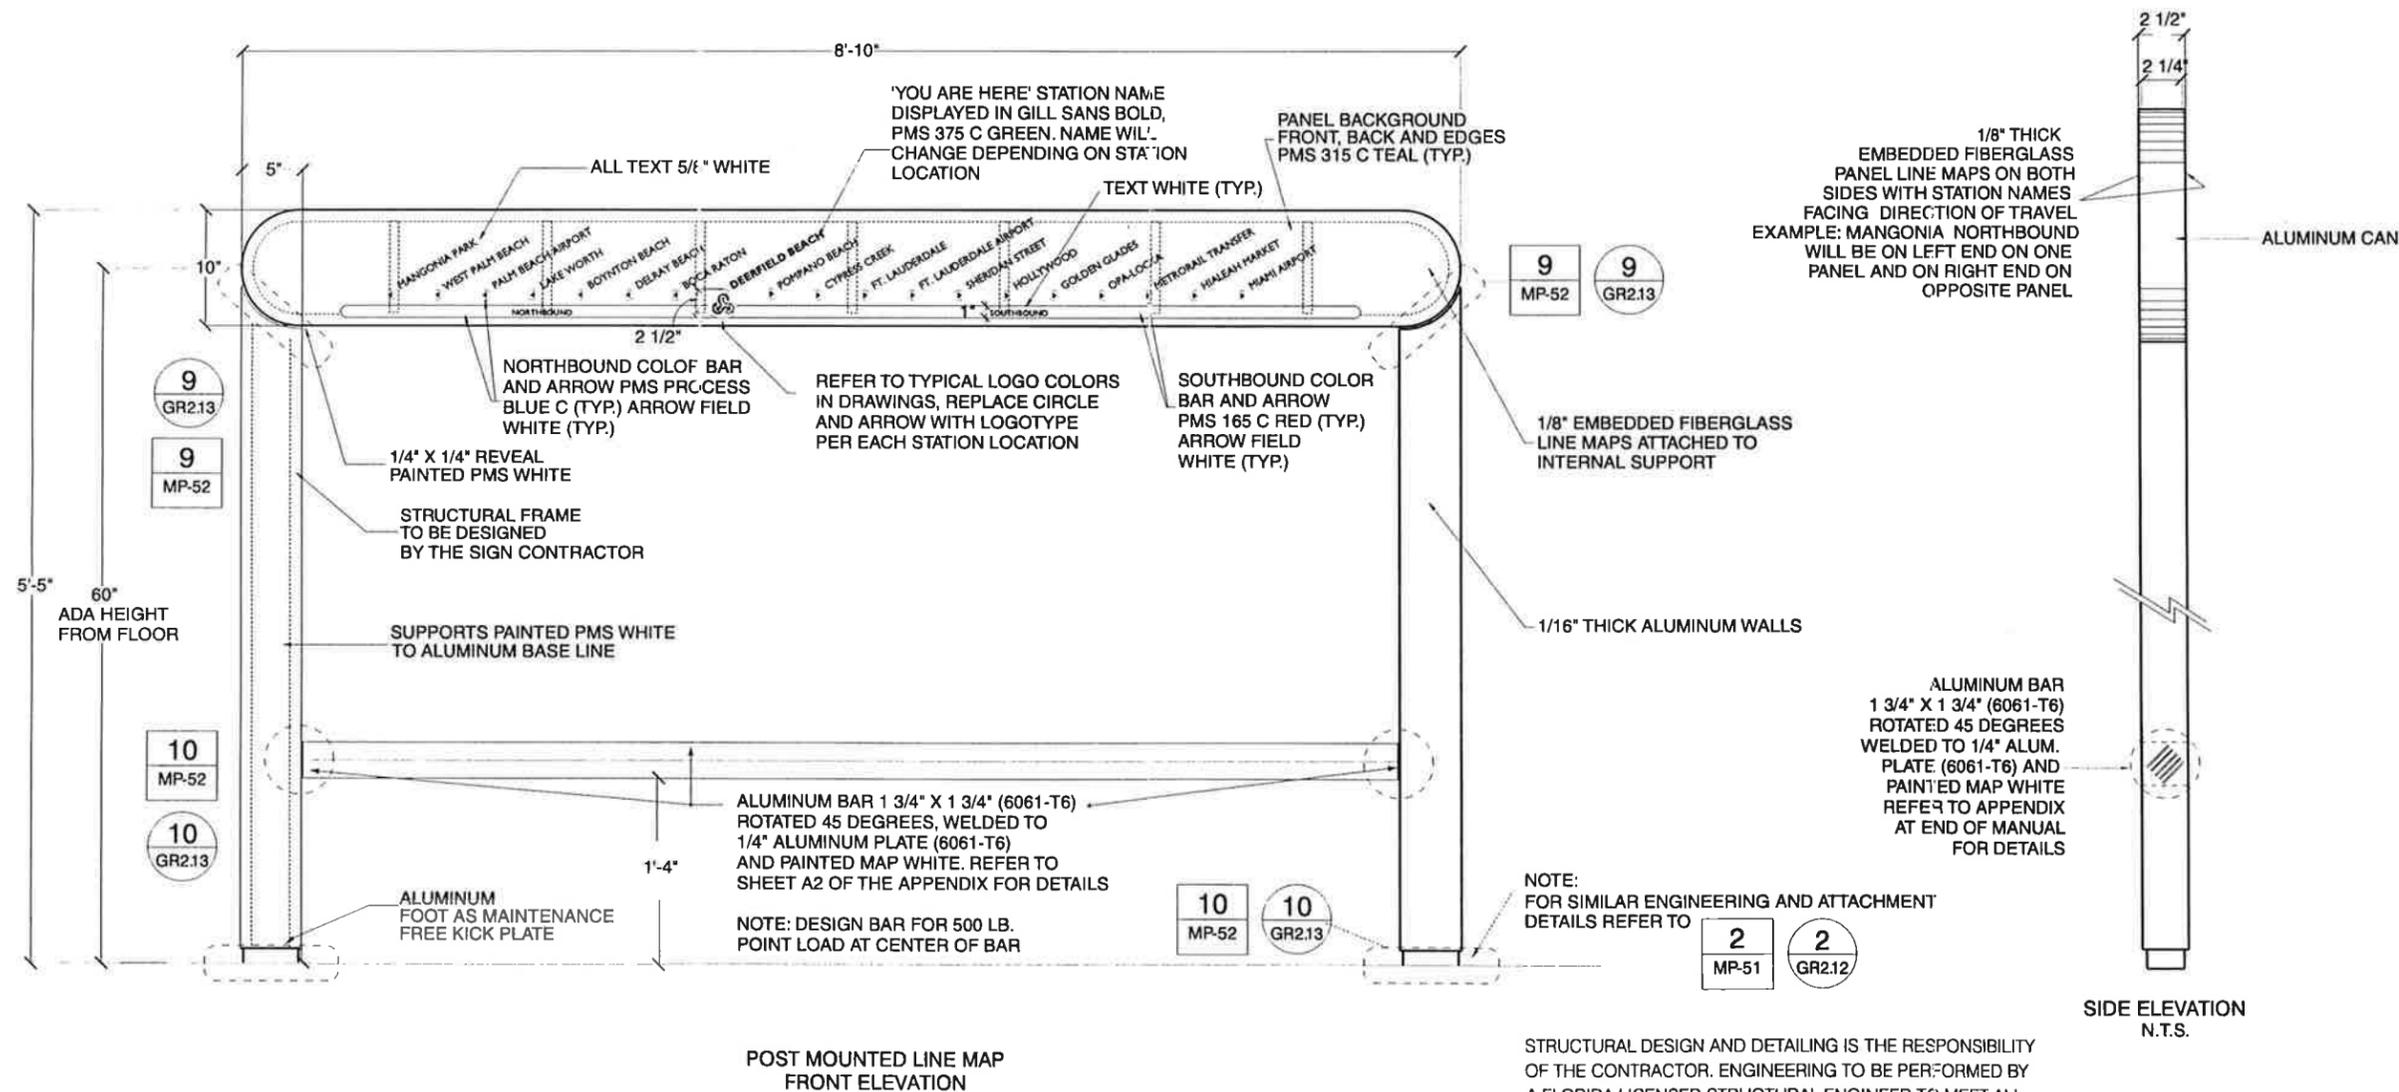

STRUCTURAL DESIGN AND DETAILING IS THE RESPONSIBILITY OF THE CONTRACTOR. ENGINEERING TO BE PERFORMED BY A FLORIDA LICENSED STRUCTURAL ENGINEER TO MEET ALL FLORIDA CODES AND REGULATIONS. DRAWINGS SHALL BE SEALED BY THE STRUCTURAL ENGINEER.

SCALE: 3/4" = 1'-0"


**SIGN TYPE C-3 POST MOUNT STATION IDENTITY**

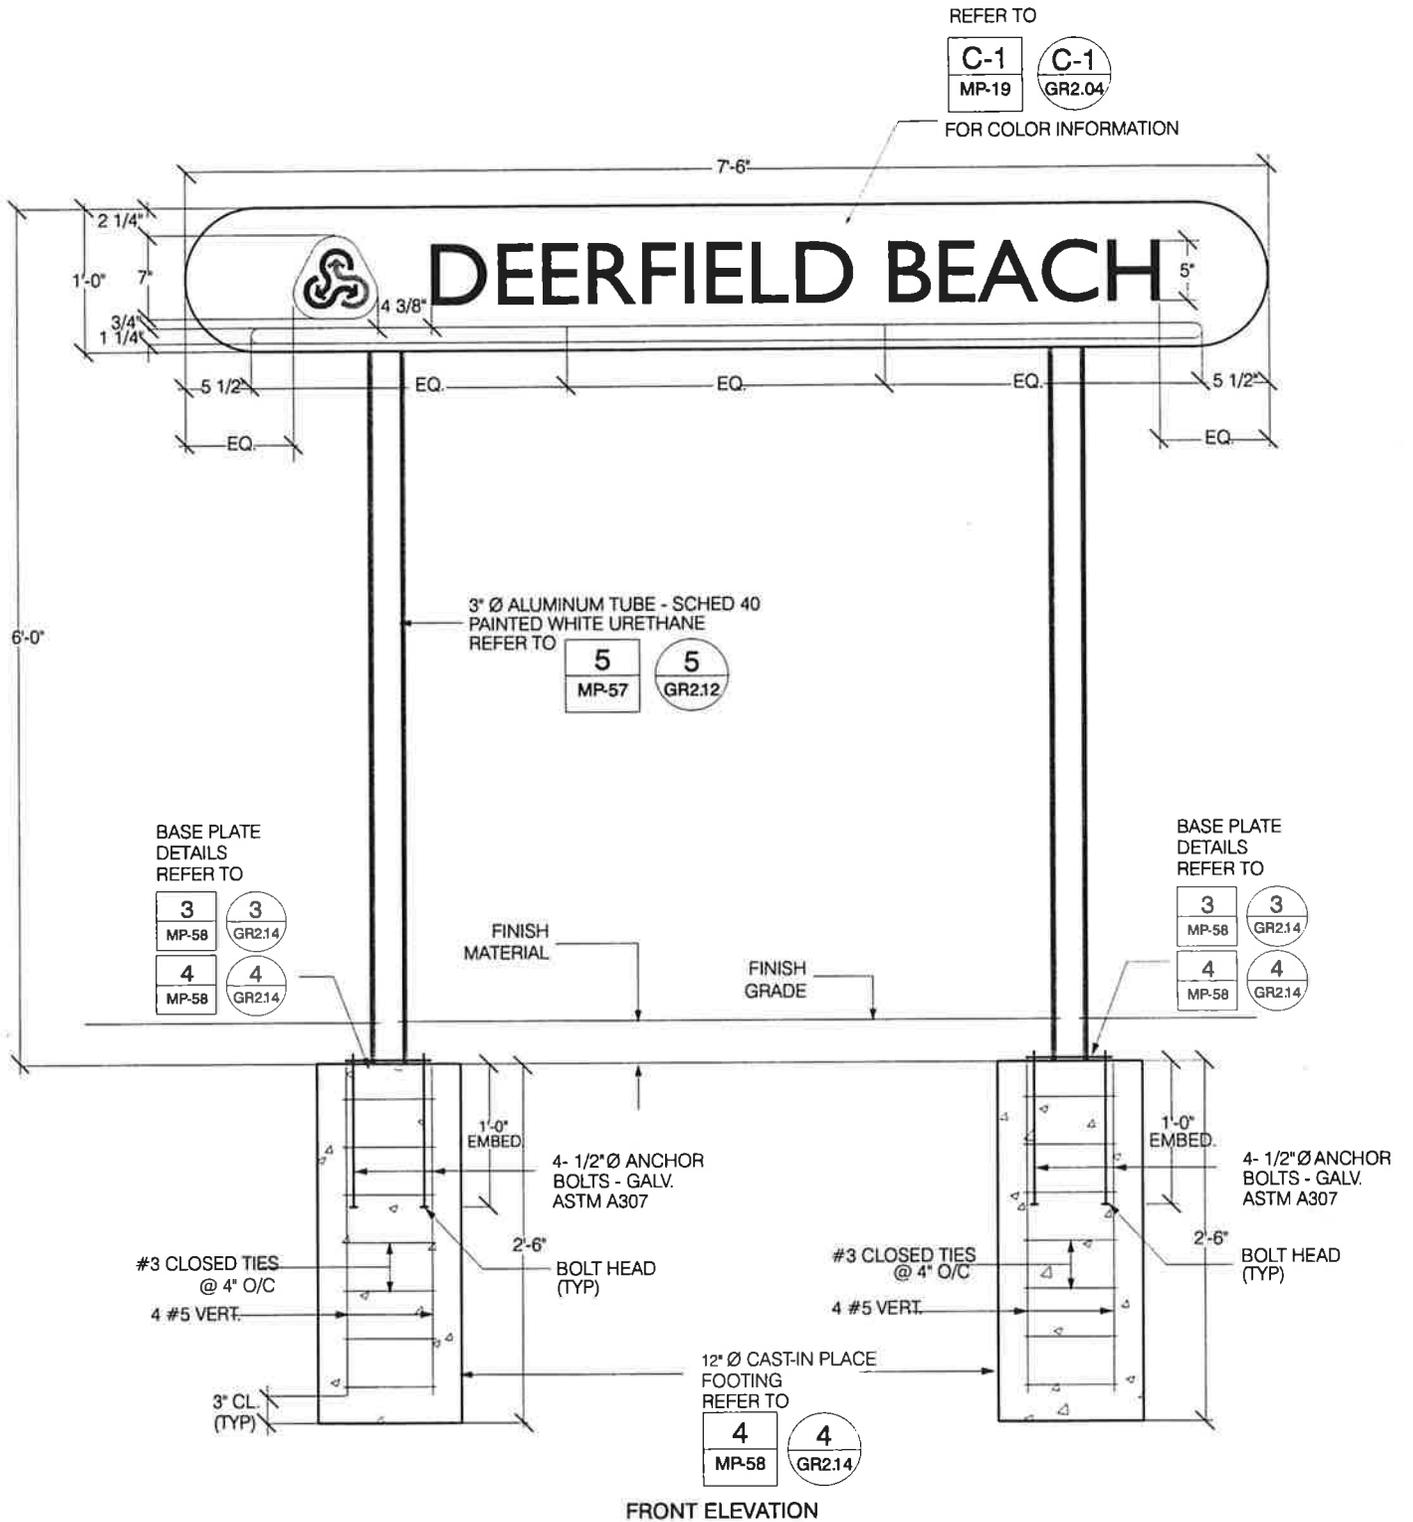



SCALE: 3/4" = 1'-0"




**SIGN TYPE PM POST MOUNT**

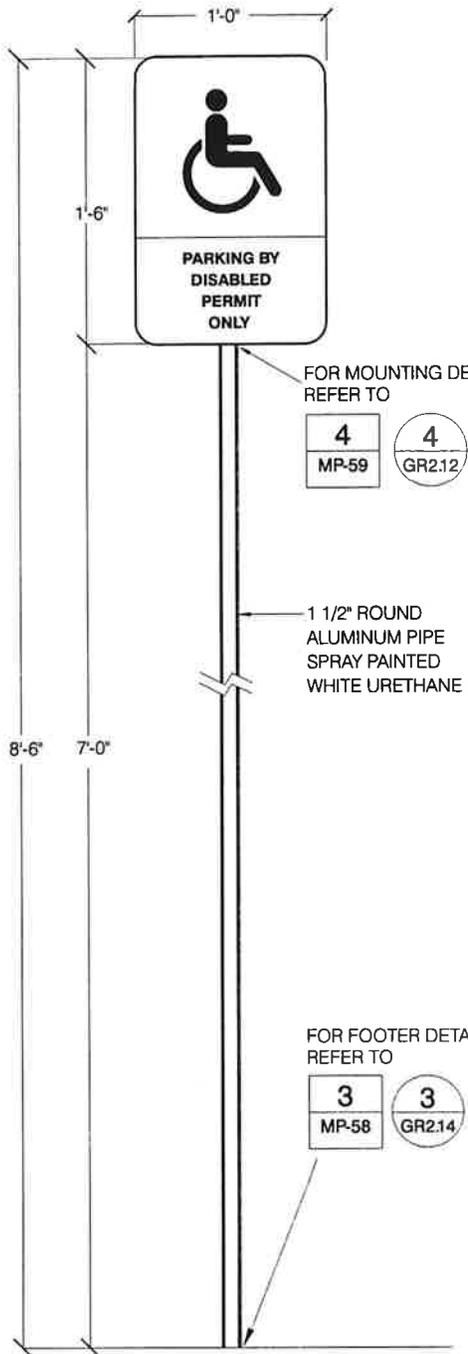


**SIGN TYPE PM**  
 STANDARD POST MOUNTED SIGN  
 FOOTING DETAIL SAME AS SIGN TYPE FM-2  
 SCALE 3/4" = 1'0"

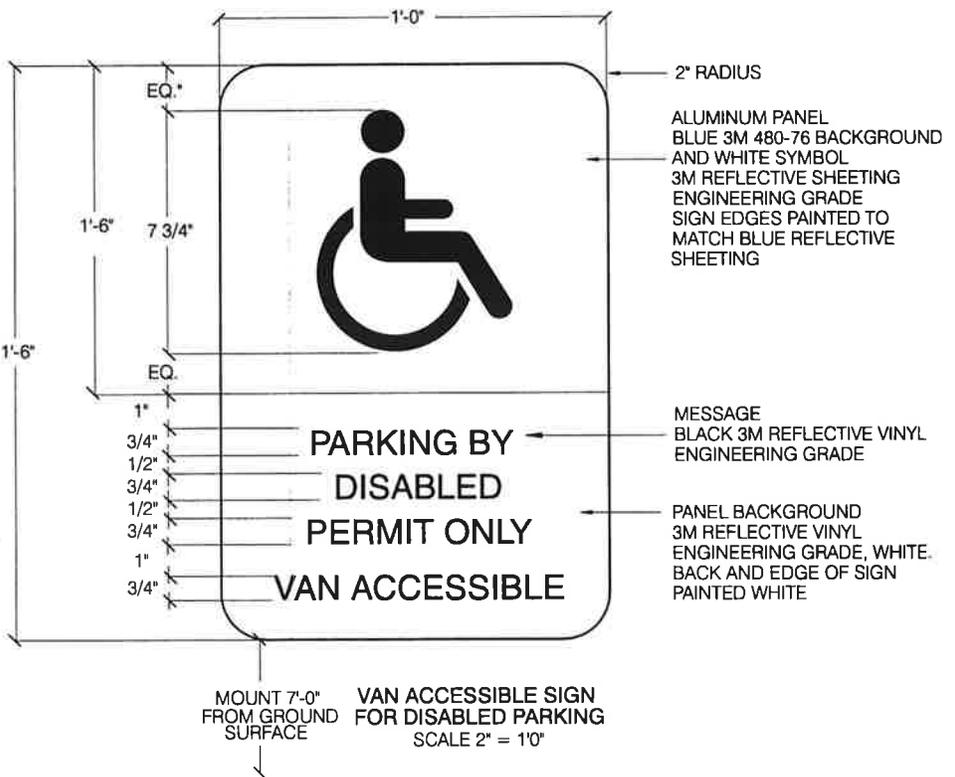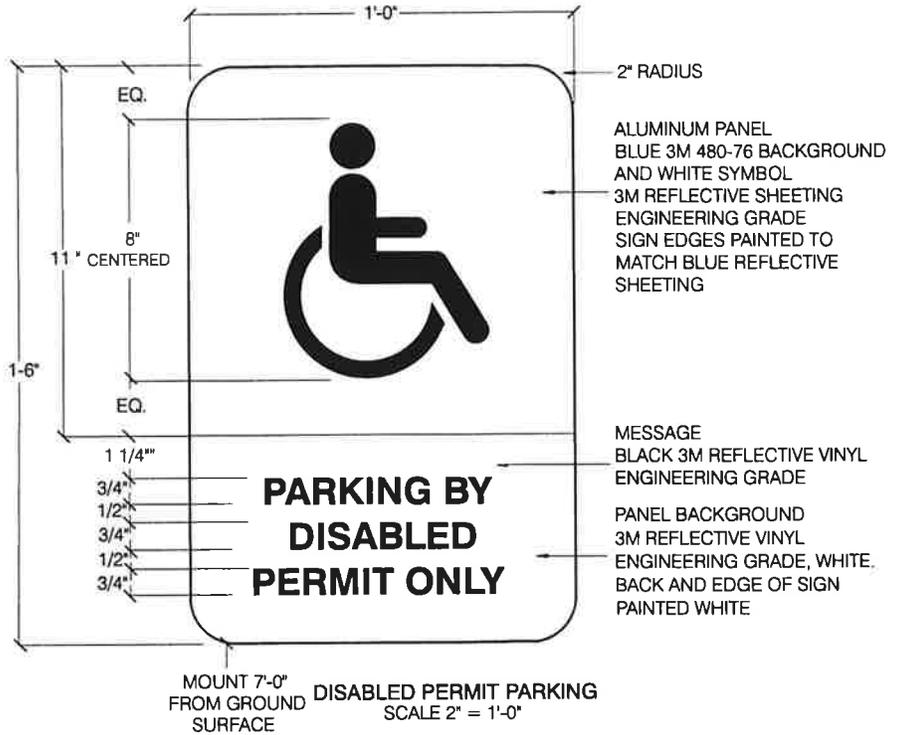


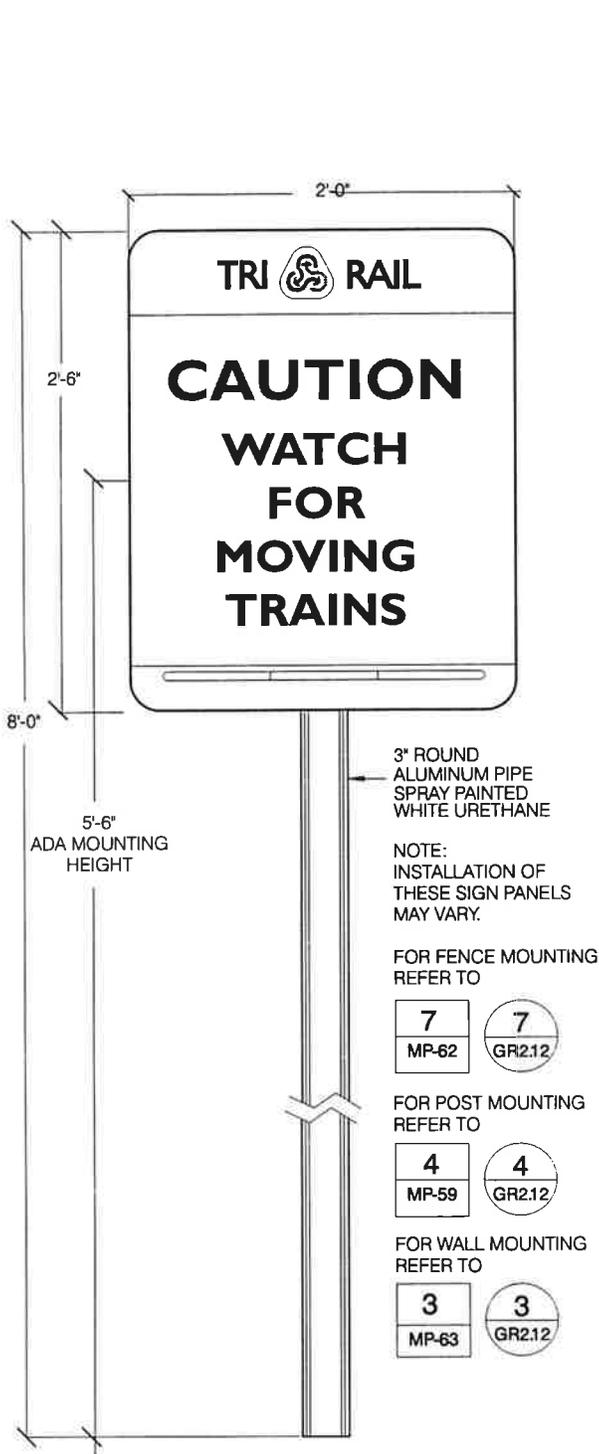

STANDARD POST MOUNTED SIGN

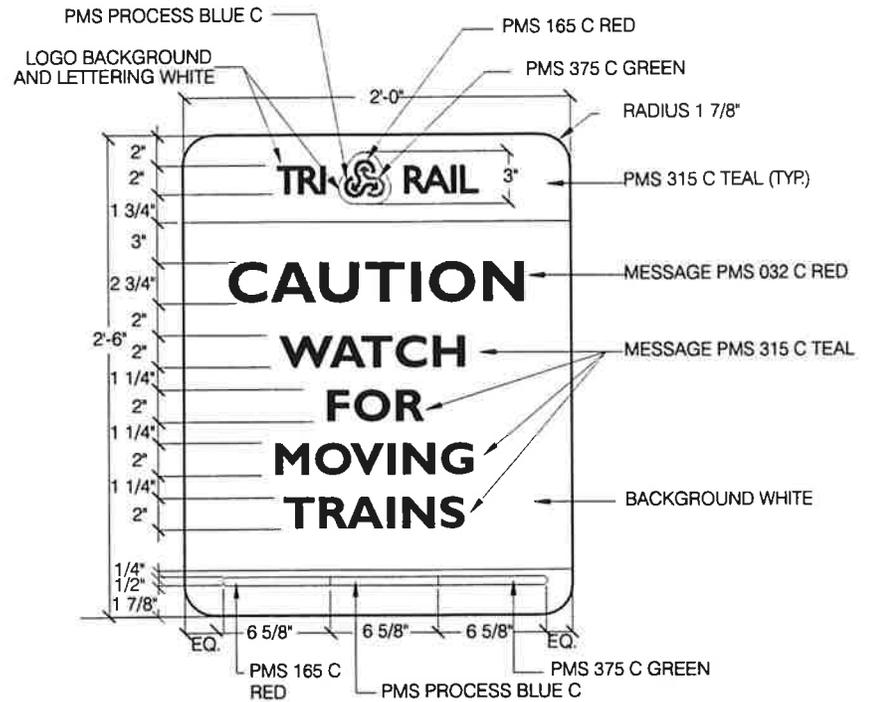

WATCH FOR MOVING TRAIN SIGN  
DEERFIELD BEACH STATION  
AND OTHER TRACK SPUR LOCATIONS

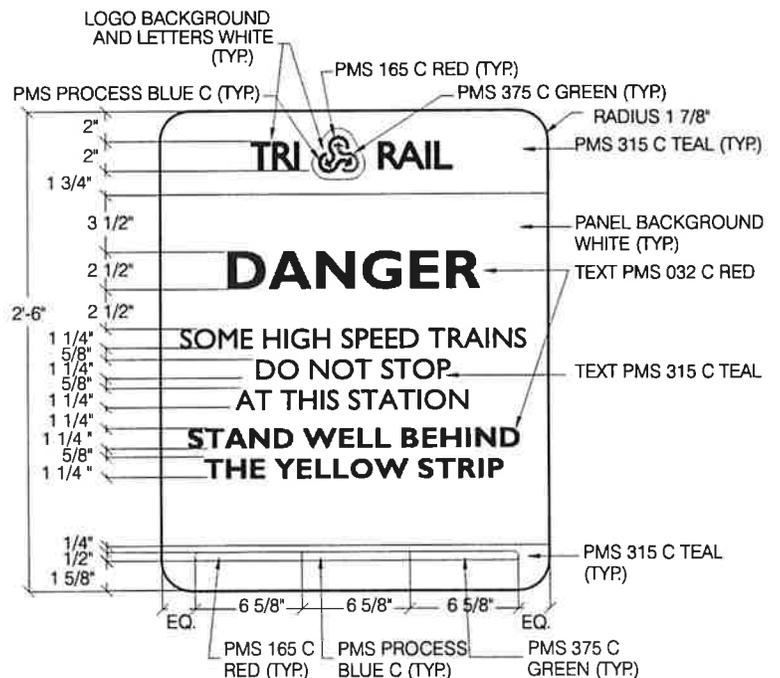


DANGER SIGN


SCALE: 1" = 10"






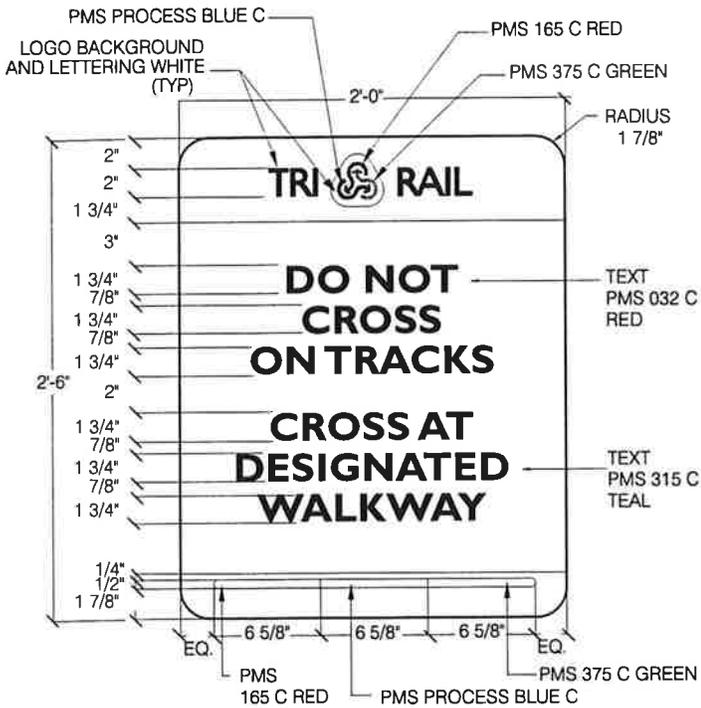

**TRACK CROSSING SIGN**

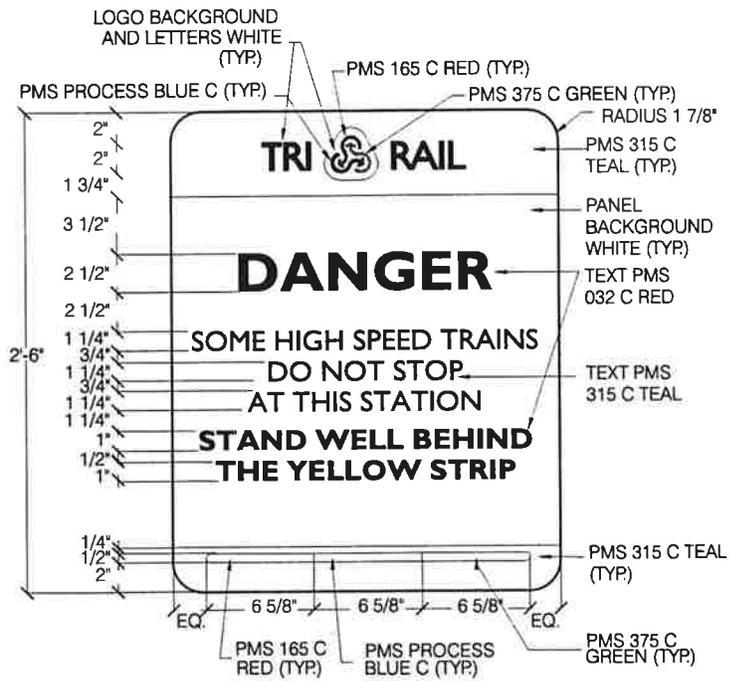


**DANGER SIGNS**

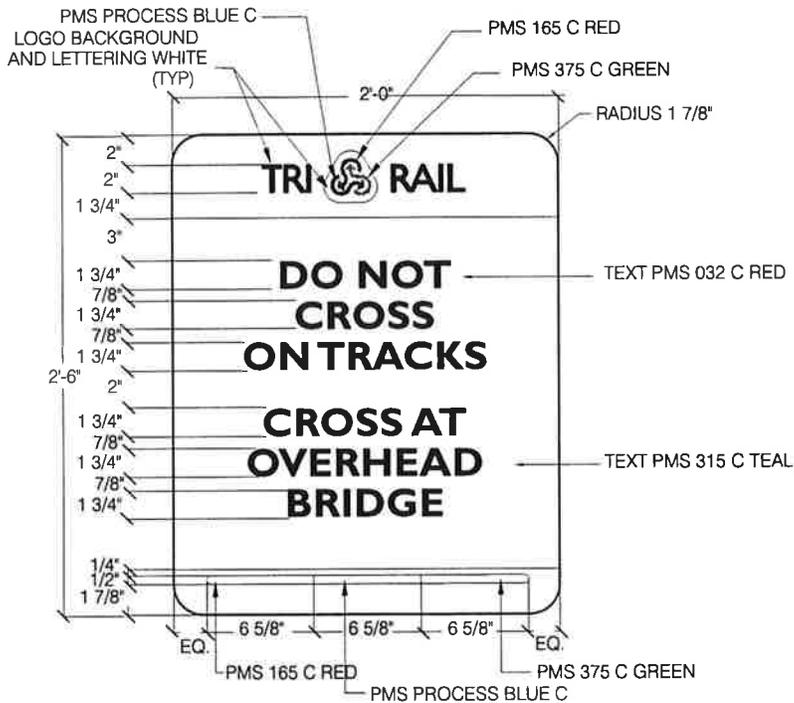


**TRACK CROSSING SIGN**

NOTE:  
INSTALLATION OF  
THESE SIGN PANELS  
MAY VARY.

FOR FENCE MOUNTING  
REFER TO




FOR POST MOUNTING  
REFER TO




SCALE: 1" = 10'



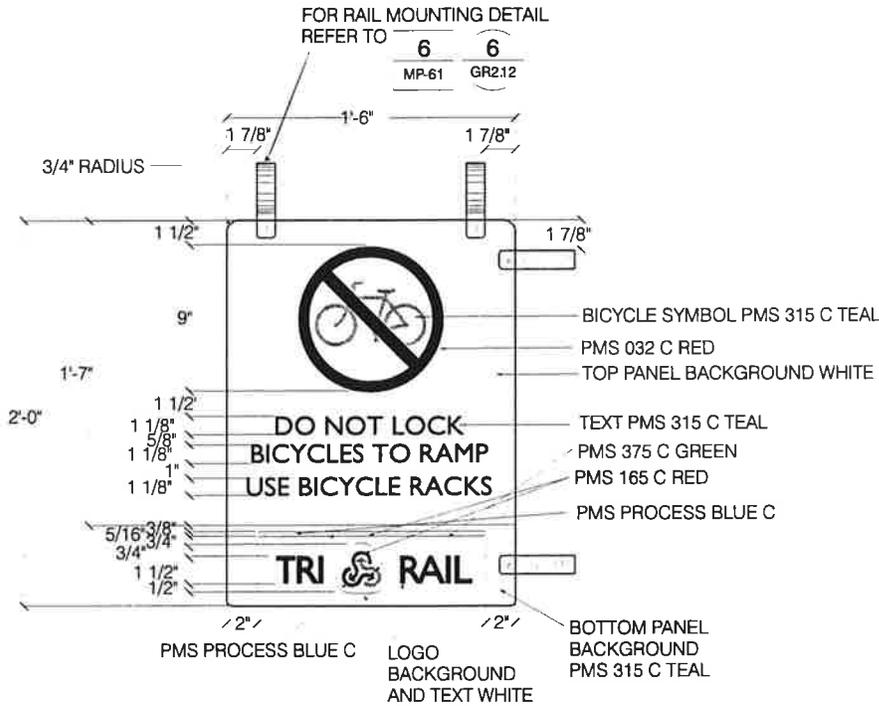


**NO BICYCLE PARKING SIGN**  
MOUNTED ON RAILING OF MINI-HIGH RAMP ON PLATFORM

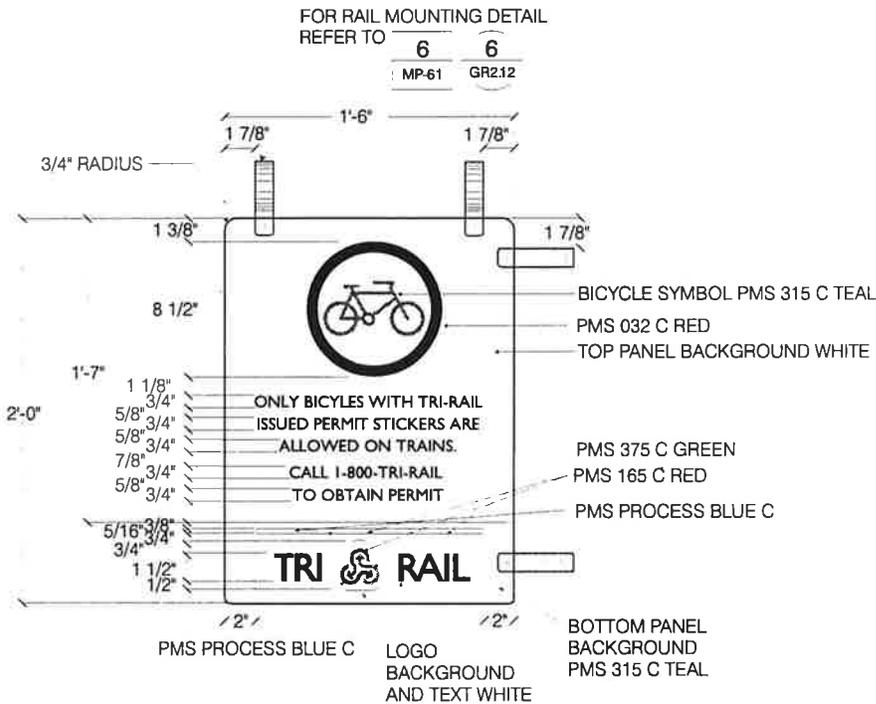


**BICYCLE PERMIT SIGN**

NOTE:  
INSTALLATION OF  
THESE SIGN PANELS  
MAY VARY


FOR FENCE MOUNTING  
REFER TO




FOR POST MOUNTING  
REFER TO



FOR RAIL MOUNTING  
REFER TO




FOR WALL MOUNTING  
REFER TO




SCALE: 1" = 1'-0"



**SIGN TYPE WM WALL MOUNT**

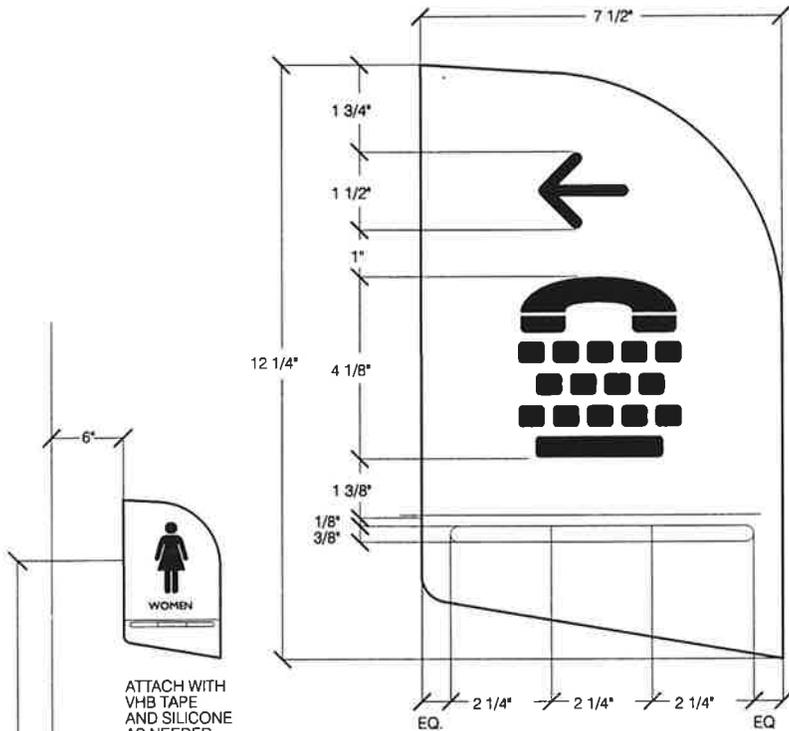


**TEXT TELEPHONE DIRECTIONAL**  
SCALE: 3" = 1'-0"

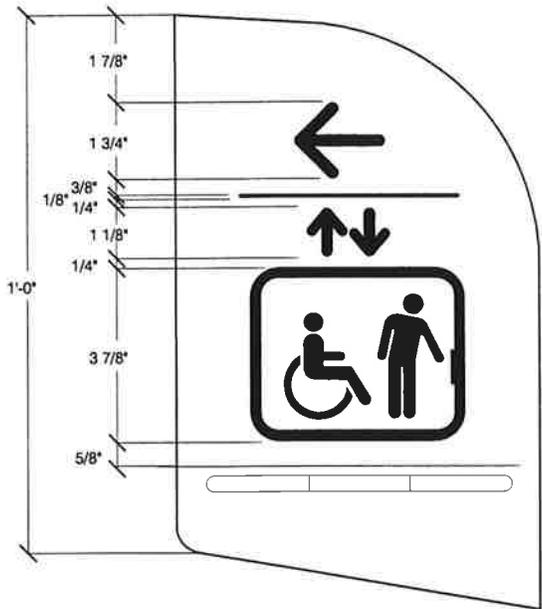


**ELEVATOR DIRECTIONAL FOR DISABLED**  
SCALE: 3" = 1'-0"

ATTACH WITH  
VHB TAPE  
AND SILICONE  
AS NEEDED  
REFER TO


3	3
MP-63	GR2:12

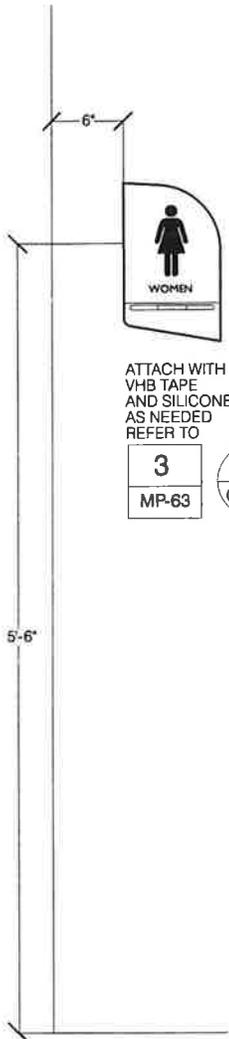

**SIGN TYPE WM**  
WALL OR COLUMN MOUNTED  
SCALE: 3/4" = 1'-0"

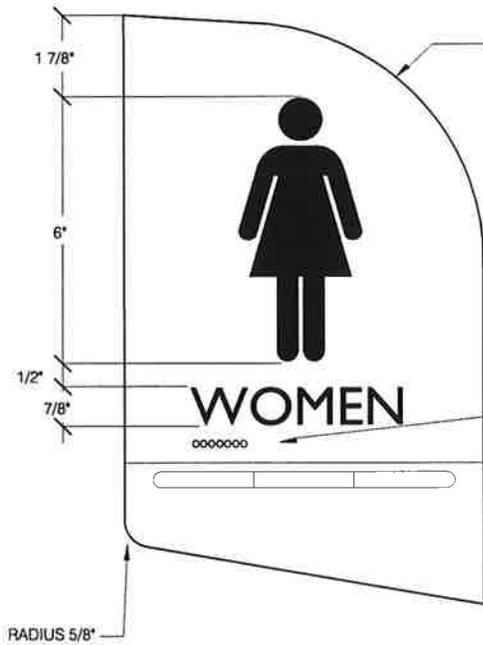


**TYPICAL WOMEN RESTROOM SIGN**  
SCALE: 3" = 1'-0"

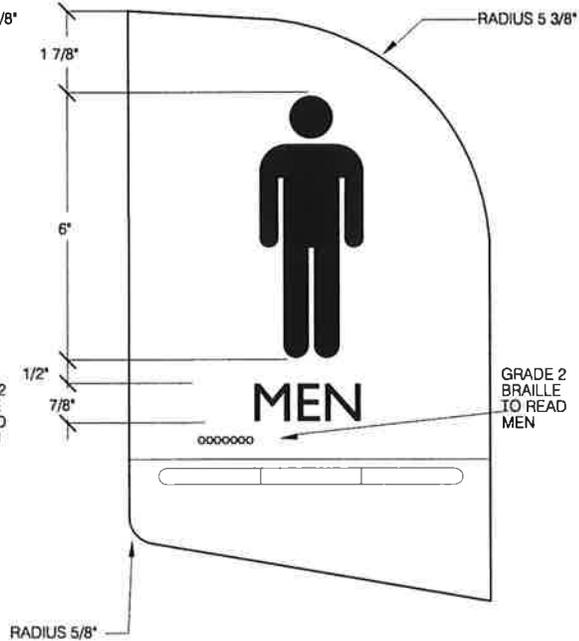

**TYPICAL MEN RESTROOM SIGN**  
SCALE: 3" = 1'-0"




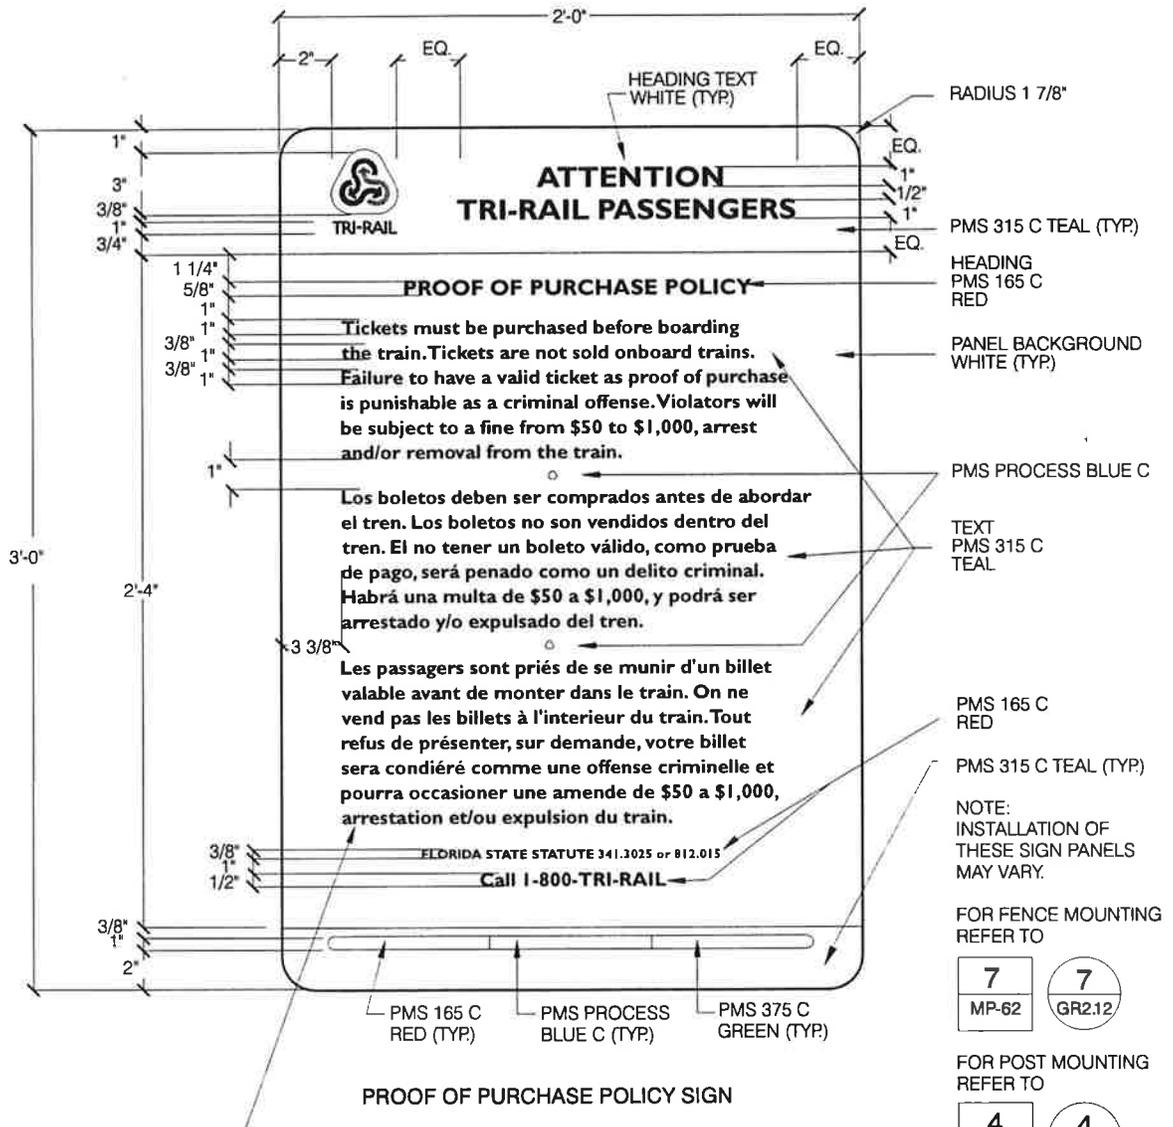

NOTE: COPY PROVIDED IN ADOBE ILLUSTRATOR 8 DIGITIZED FORMAT. (DISCOUNTSM8.AI) FOR TEXT AND COLOR BREAKDOWN ON DISK SUPPLIED BY TRI-RAIL.

SCALE: 1-1/2" = 10'



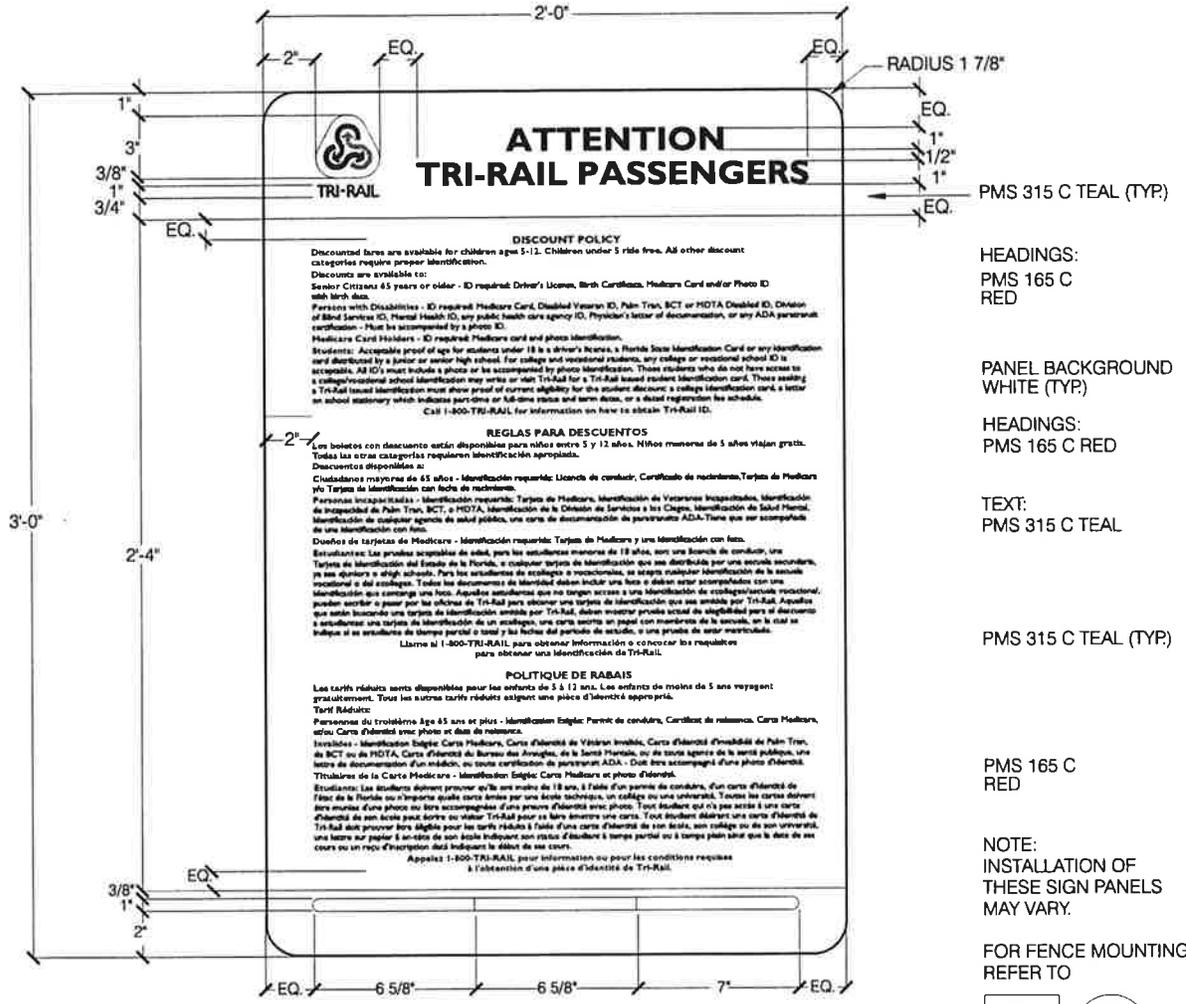

PMS 315 C TEAL (TYP)

HEADINGS:  
PMS 165 C  
RED

PANEL BACKGROUND  
WHITE (TYP)

HEADINGS:  
PMS 165 C RED

TEXT:  
PMS 315 C TEAL

PMS 315 C TEAL (TYP)


PMS 165 C  
RED

NOTE:  
INSTALLATION OF  
THESE SIGN PANELS  
MAY VARY.

FOR FENCE MOUNTING  
REFER TO

FOR POST MOUNTING  
REFER TO

FOR WALL MOUNTING  
REFER TO

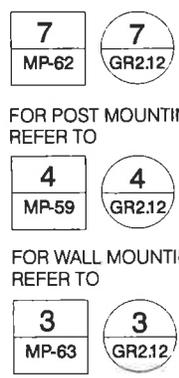


DISCOUNT POLICY SIGN

NOTE: COPY PROVIDED IN ADOBE ILLUSTRATOR 8 DIGITIZED FORMAT. (DISCOUNTSM8.AI) FOR TEXT AND COLOR BREAKDOWN ON DISK SUPPLIED BY TRI-RAIL.

SCALE: 1-1/2" = 1'-0"

**SIGN TYPE WM ELEVATOR**

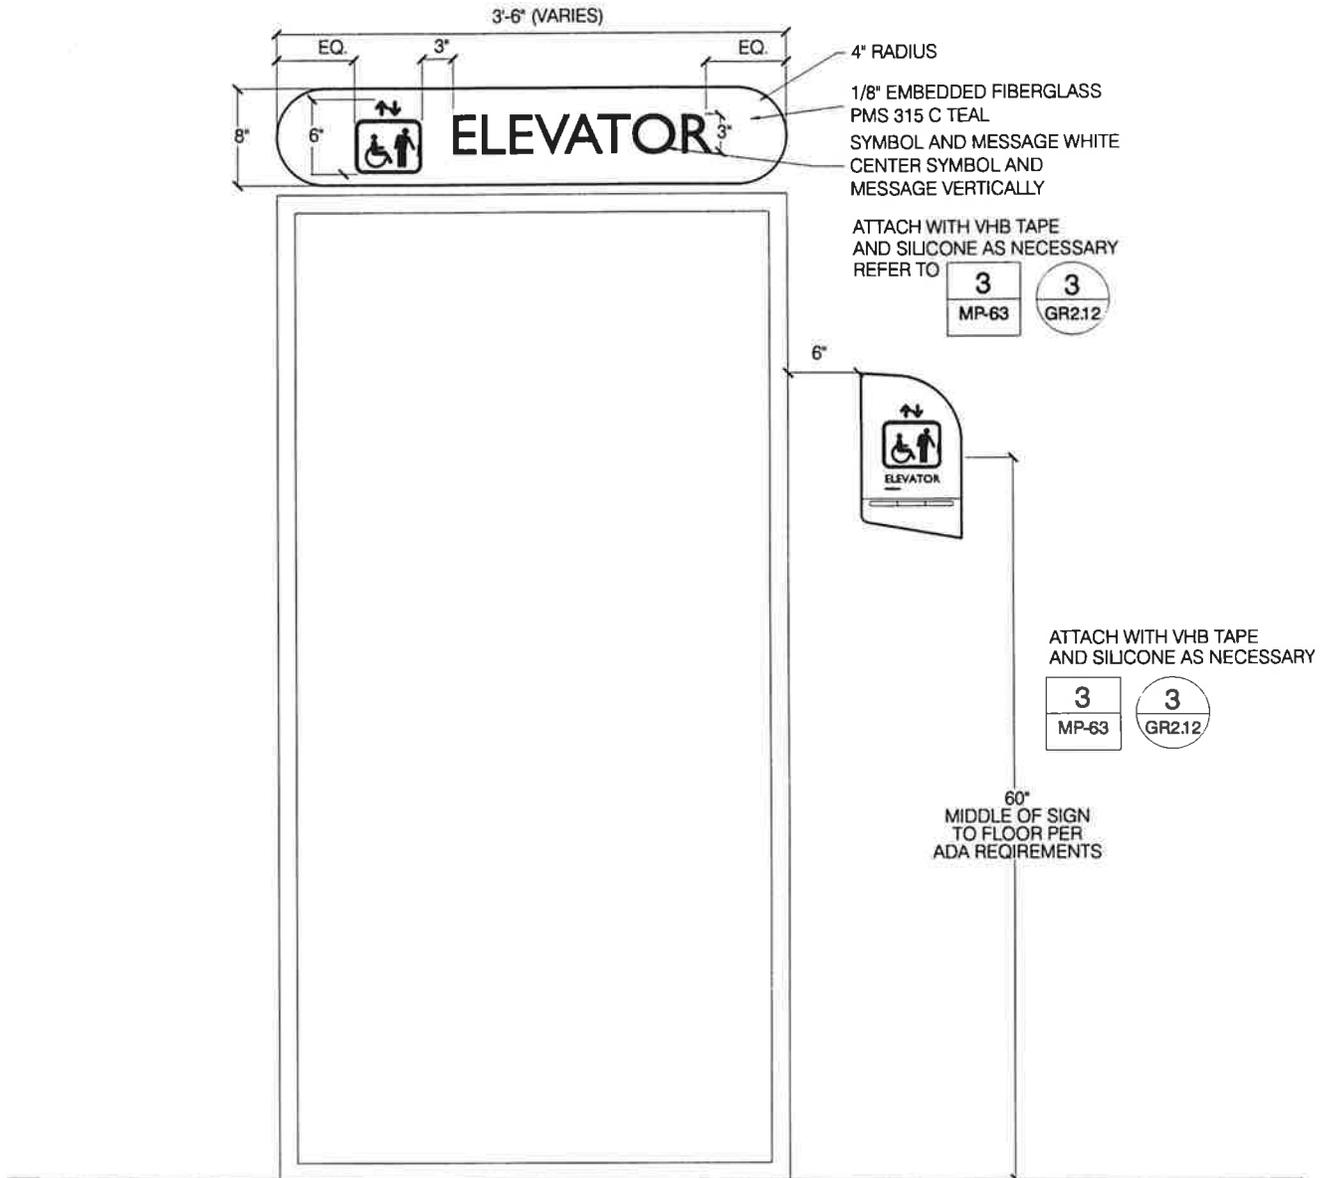

**OVERHEAD MOUNTED ELEVATOR SIGN**


**WALL MOUNTED ELEVATOR SIGN**

ALTERNATE #2 ELEVATOR SIGN FOR CONDITIONS  
WHERE LACK OF HEADROOM PROHIBITS MOUNTING  
A SIGN PANEL OVER THE ELEVATOR DOORS.



SCALE: 3/4" = 1'-0"



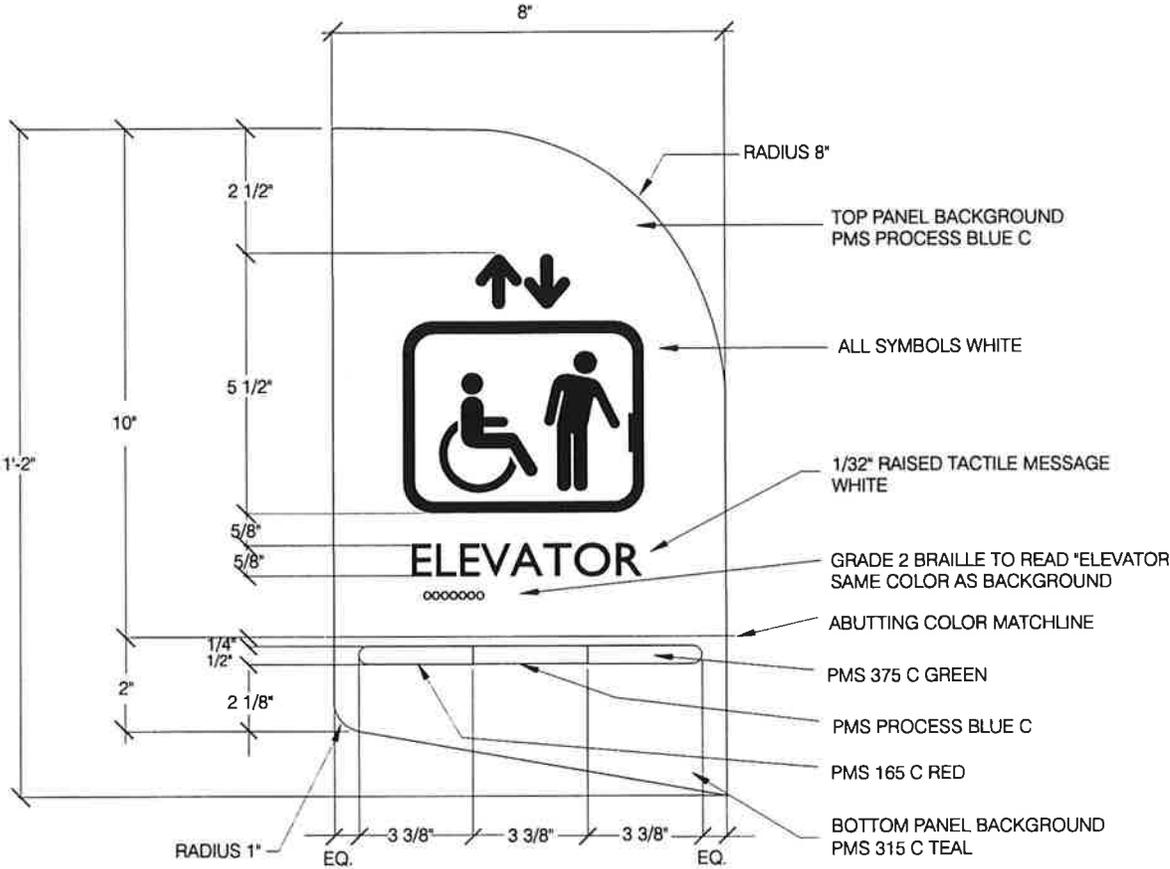


**WALL MOUNTED ELEVATOR SIGN**  
 ALTERNATE #2 ELEVATOR SIGN FOR CONDITIONS  
 WHERE LACK OF HEADROOM PROHIBITS MOUNTING  
 A SIGN PANEL OVER THE ELEVATOR DOORS.  
 REFER TO

<b>3</b>	<b>3</b>
MP-63	GR2.12

SCALE: 3" = 10"



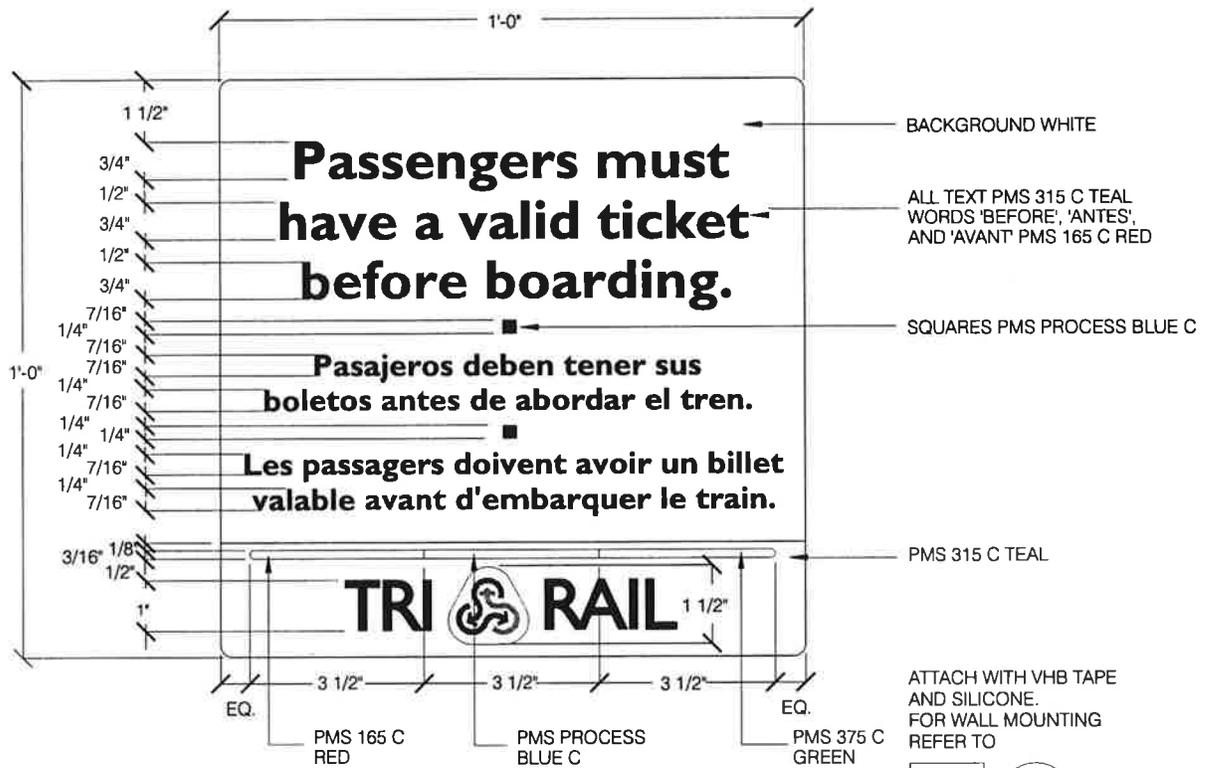

FOR TRI-RAIL LOGOTYPE  
AND ARROW COLORS REFER TO




**VALID TICKET SIGN**



SCALE: 3" = 1'0"



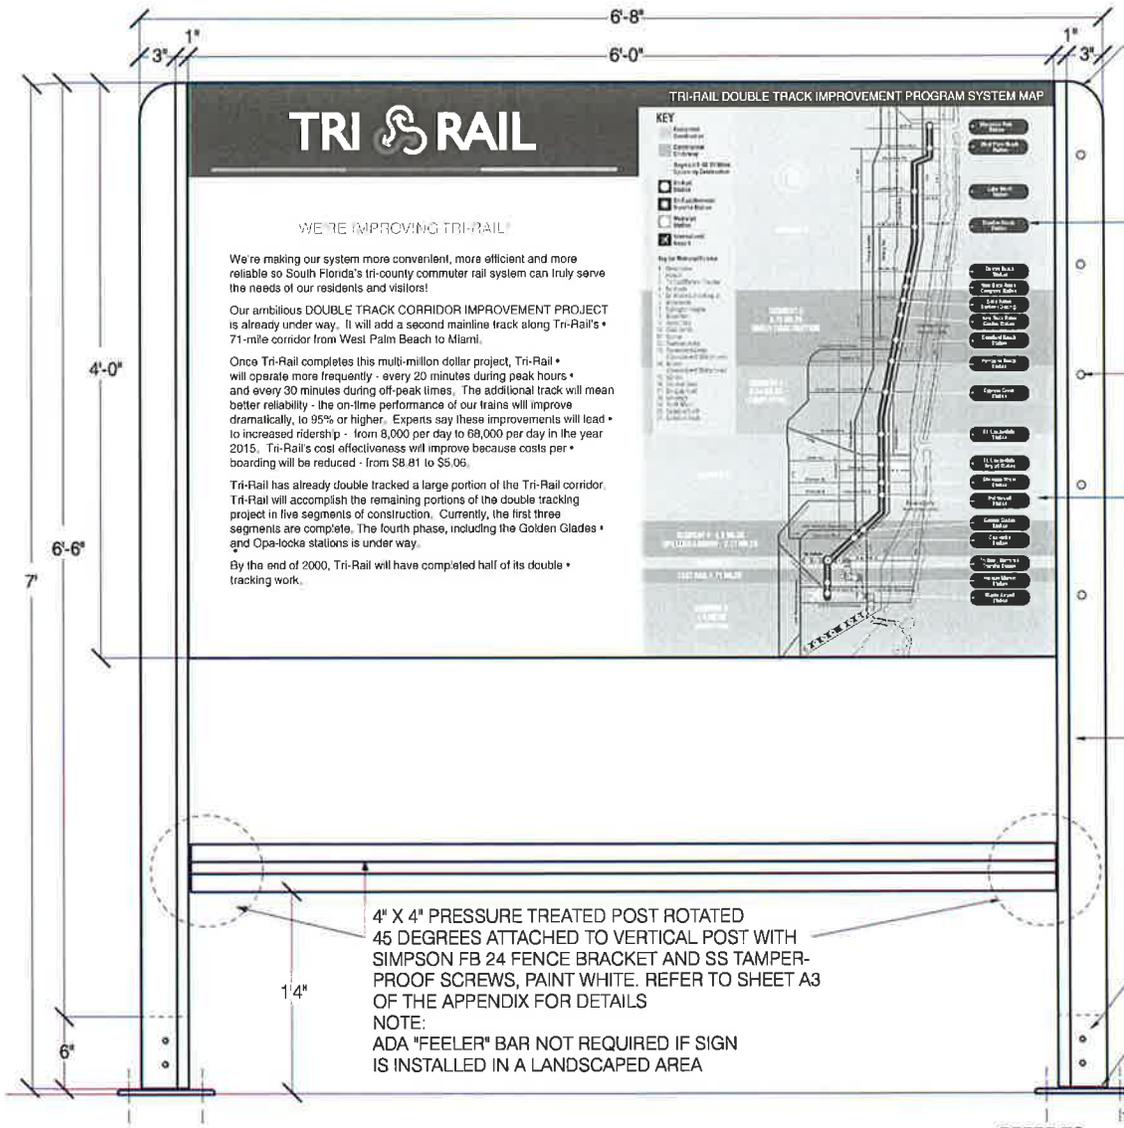

- 4" RADIUS
- 1" X 4' X 6' SIMPSON MDO PLYWOOD PAINTED WITH MAP POLYURETHANE WHITE AS PER MANUFACTURERS INSTRUCTIONS
- 4" X 6" PANEL WILL INTRUDE INTO POSTS 2" ON EITHER SIDE, ACTUAL VIEWING AREA OF PANEL WILL BE 4' X 5'-8" ALL EDGES FILLED, SANDED SMOOTH AND PAINTED MAP WHITE
- COUNTER SUNK SCREWS PLUGGED, SANDED SMOOTH
- USE DIGITIZED ART PROVIDED BY TRI-RAIL IN ADOBE ILLUSTRATOR FORMAT. PANELS TO RECEIVE 1/8" PANNIER EMBEDDED FIBERGLASS PANELS CONTAINING ART WORK AS PER MANUFACTURERS SPECIFICATIONS.
- WORD 'COMPLETED' UNDER STAGE INFORMATION IN BANDS TO BE APPLIED WITH MATCHING WHITE DECAL LETTERS ONTO FACE OF EMBEDDED FIBERGLASS PANEL
- 4" X 4" X 7' PRESSURE TREATED POST WITH 1" CHAMFER, SLOTTED TO RECEIVE MDO PLYWOOD. POST DRILLED TO RECEIVE 3" SCREW THROUGH MDO PLYWOOD, HOLE PLUGGED, SANDED SMOOTH AND PAINTED MAP WHITE
- POST SLOTTED TO RECEIVE 3/8" MOUNTING PLATE. POST TO BE DRILLED TO ACCOMMODATE NUTS AND BOLTS. HOLES TO BE PLUGGED, SANDED SMOOTH AND POST PAINTED MAP WHITE
- 3/8" STEEL MOUNTING PLATE PAINTED MAP WHITE
- POSTS TO BE ANCHORED TO FLOOR OR GROUND AS PER INSTRUCTIONS OF TRI RAIL REPRESENTATIVE DEPENDING ON SIGN LOCATION ON SITE AND PER ENGINEERING DRAWINGS OF FABRICATOR TO MEET ALL CODES

DUAL TRACK CONSTRUCTION PHASING SIGN





REFER TO

2	2
MP-60	GR2.14


SCALE: 3/4" = 1'0"




**SIGN TYPE PL PERMANENT ROOM**

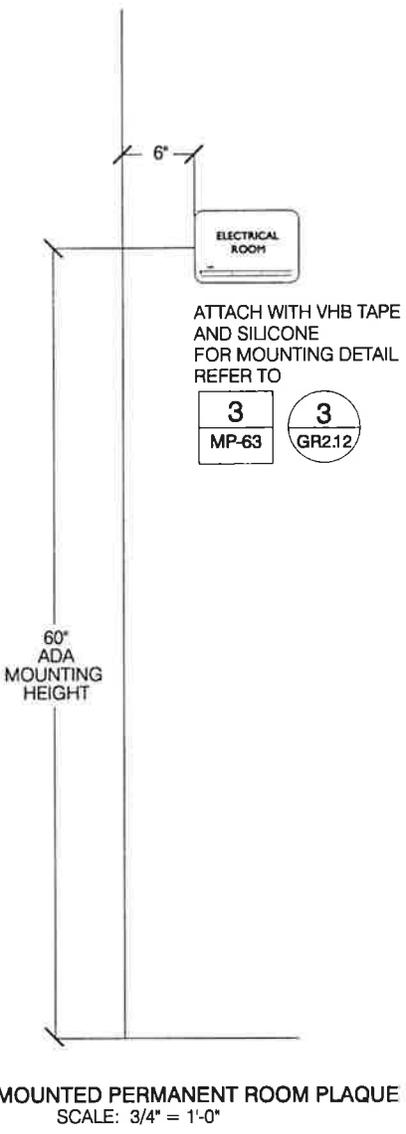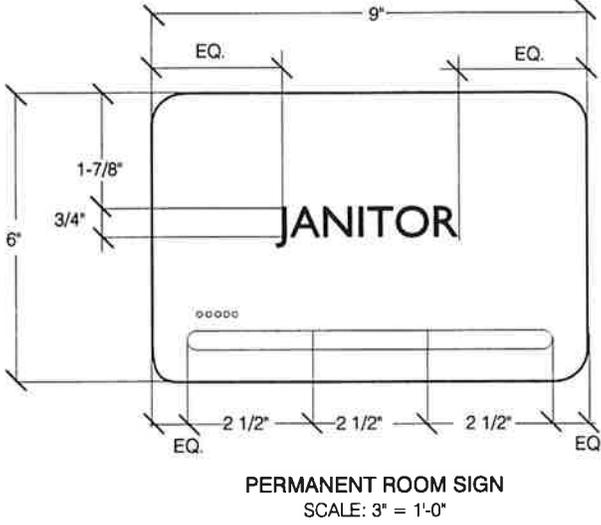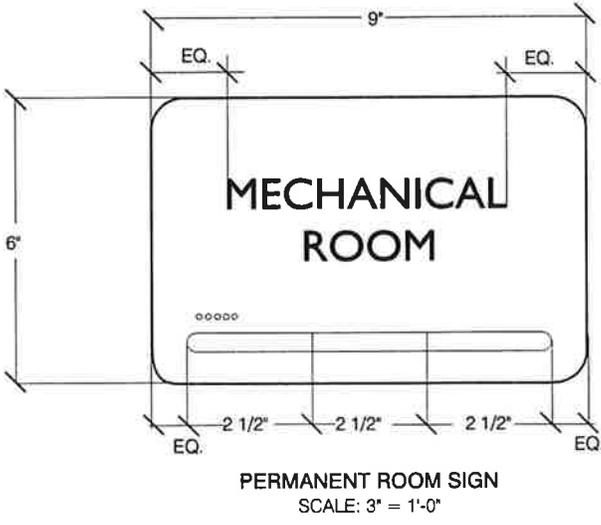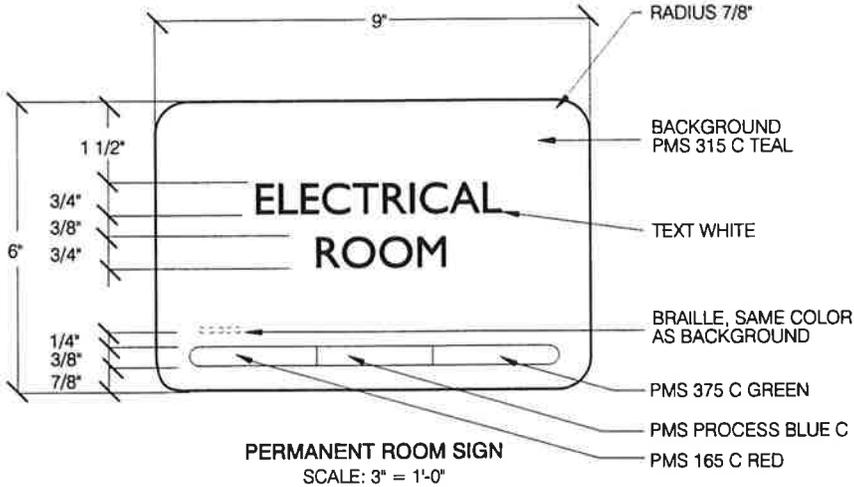

- 1 COLOR LEGEND:
- 2 PMS PROCESS BLUE C
- 3 PMS 165 C RED
- 4 PMS 375 C GREEN
- 5 PMS 343 C GREEN
- 6 PMS 5527
- TO MATCH EXIST. STATION COLOR AS APPROVED BY ARCHITECT.

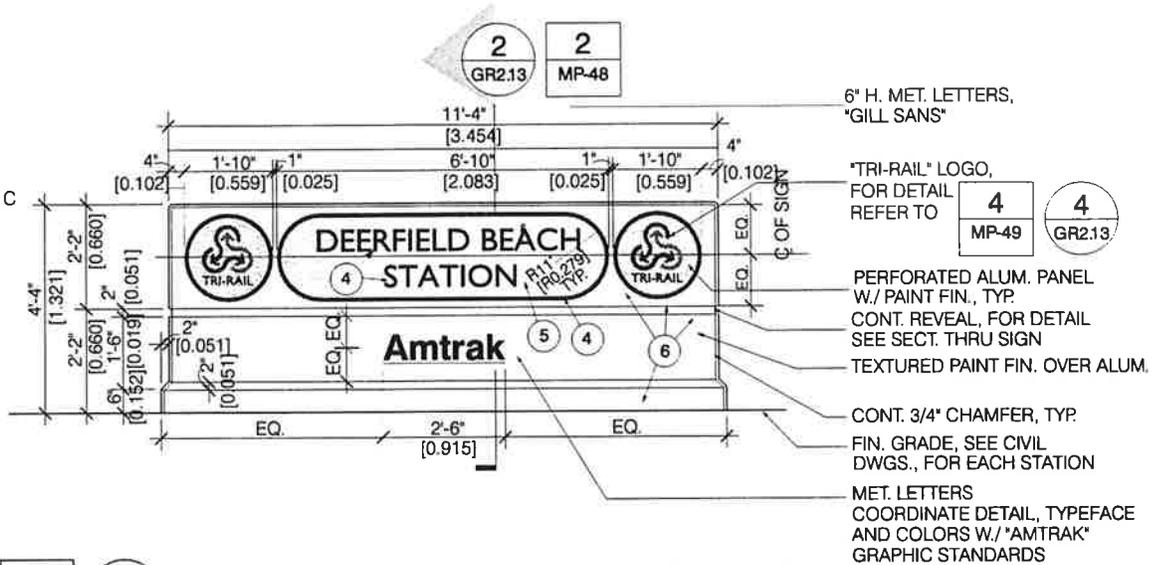


**1** **1** DETAIL. SIGN TYPE ME, TWO-SIDED MAIN ENTRY MONUMENT  
 MP-48 GR2.13 SCALE: 1/4" = 1'-0"

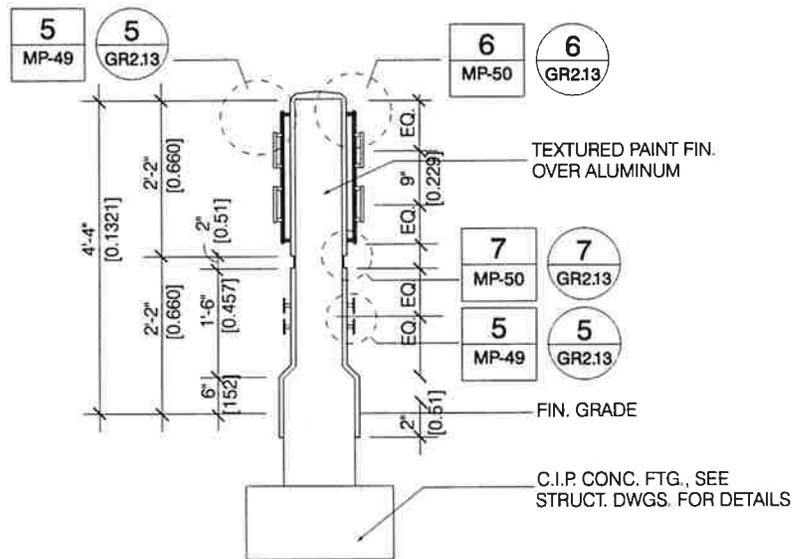


**2** **2** DETAIL. SIGN TYPE ME SECTION  
 MP-48 GR2.13 SCALE: 3/8" = 1'-0"



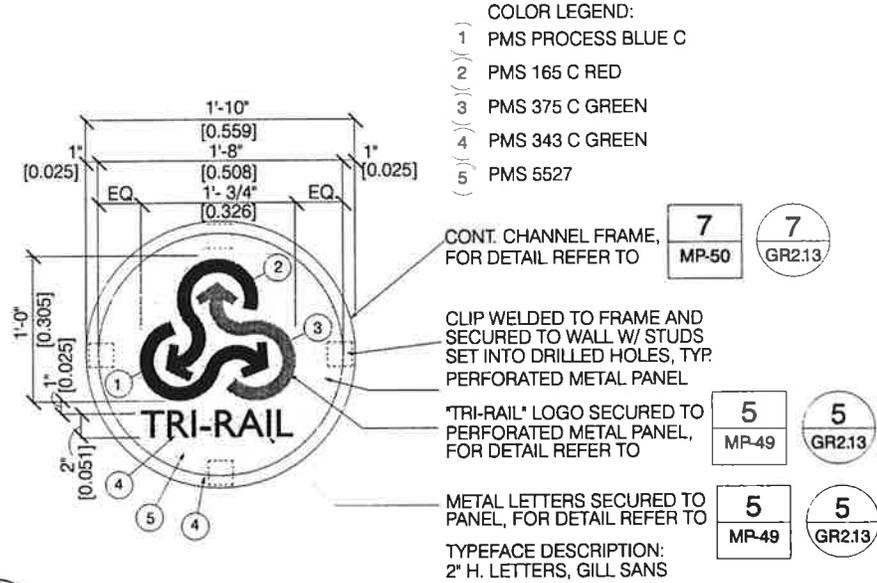


4 4 **DETAIL**  
MP-49 GR2.13 SCALE: 3/4" = 1'-0"

NOTE:  
PROTECT DISSIMILAR MATERIALS AS REQUIRED.

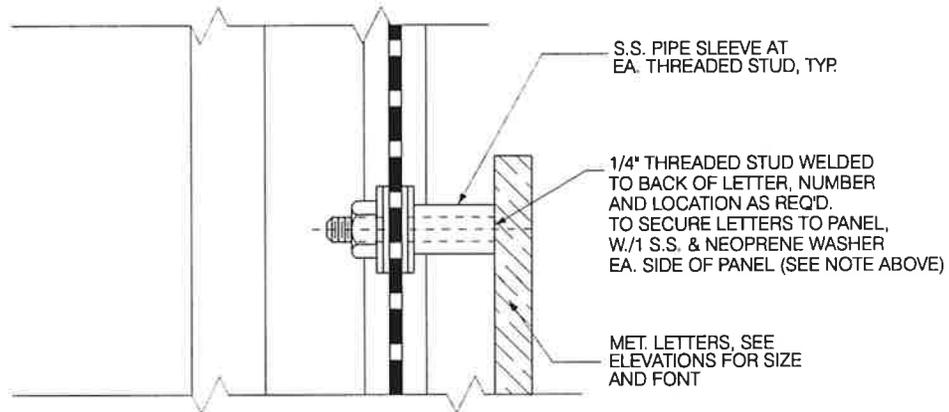


5 5 **DETAIL**  
MP-49 GR2.13 SCALE: 1" = 1"



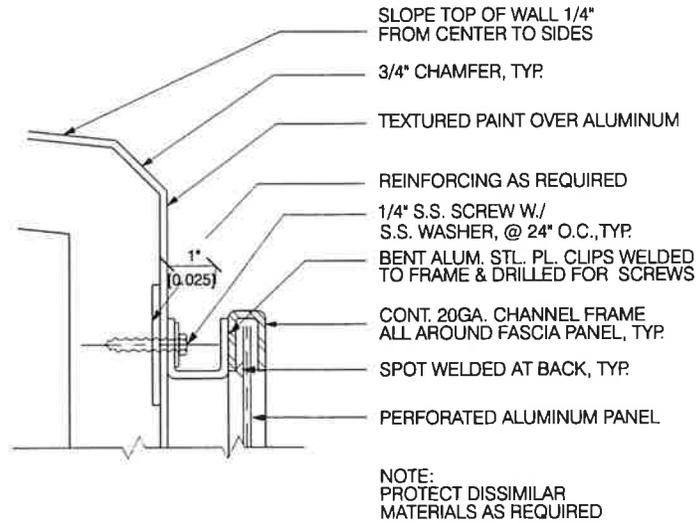


6	6	DETAIL
MP-49	GR2.13	

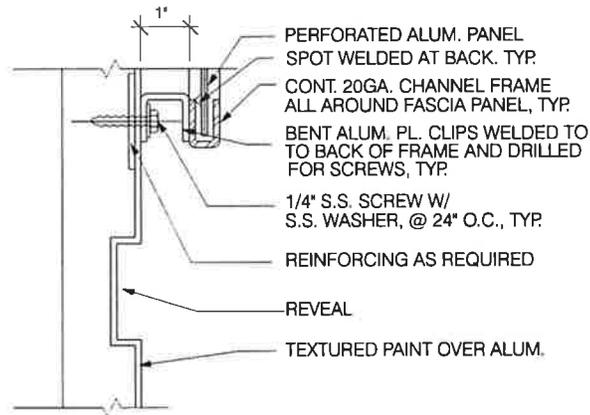


7	7	DETAIL
MP-50	GR2.13	

SCALE: 3" = 1'-0"



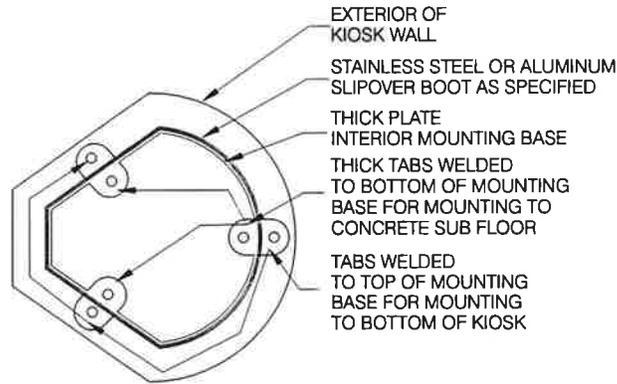

**INTERIOR PLATE, PLAN VIEW**

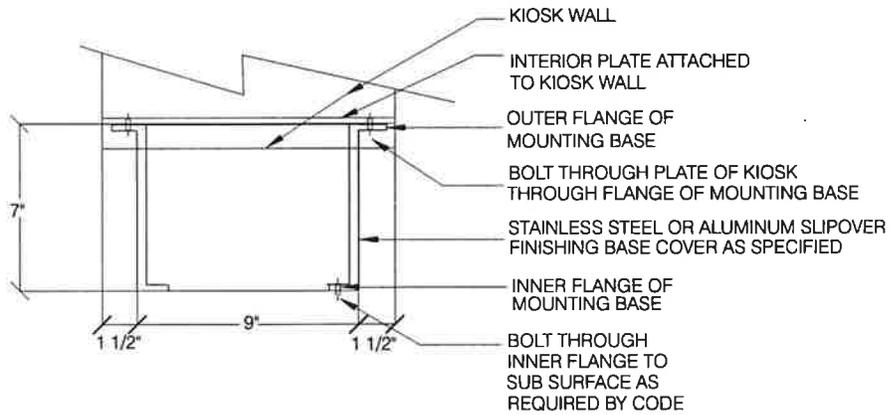

**INTERIOR PLATE, SECTION**

NOTE: DETAILS SCHEMATIC.  
 ACTUAL DESIGN SHALL BE PER MANUFACTURER  
 AND SPECIALTY ENGINEER.


2  
 MP-51

2  
 GR2.12


DETAIL. SIGN TYPE KI-KIOSK, PY-PLOK

SCALE: 1-1/2" = 10"



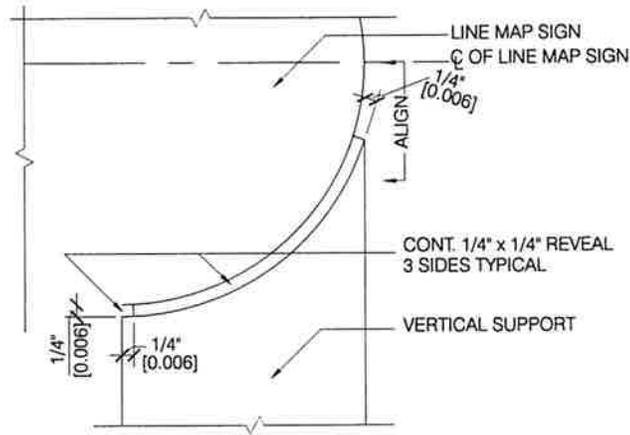


9	9	DETAIL
MP-52	GR2.13	NTS

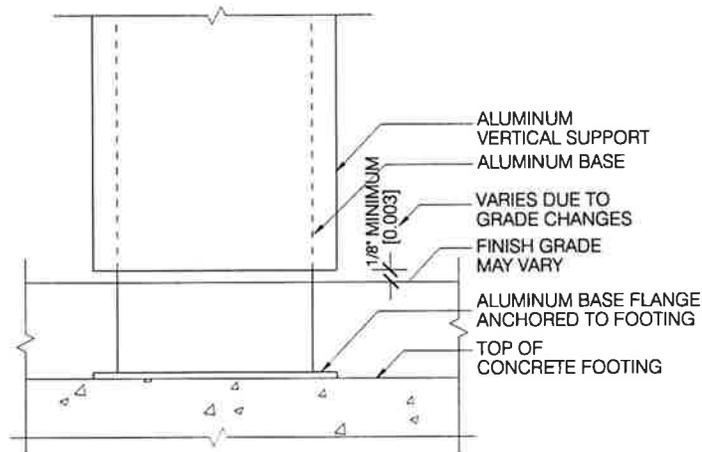

10	10	DETAIL
MP-52	GR2.13	NTS

**SIGN TYPES C-1. C-2 CANOPY SIGNS**

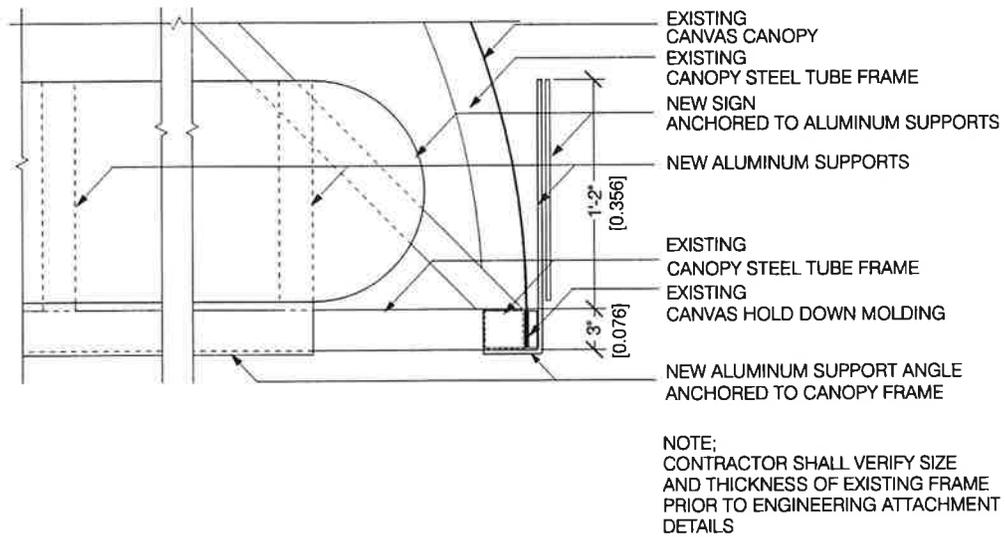


11  
 MP-53

11  
 GR2.13


DETAIL. SUGGESTED ATTACHMENT C-1 AND C-2 SIGNS TO CANVAS CANOPIES

SCALE: 1" = 1'-0"




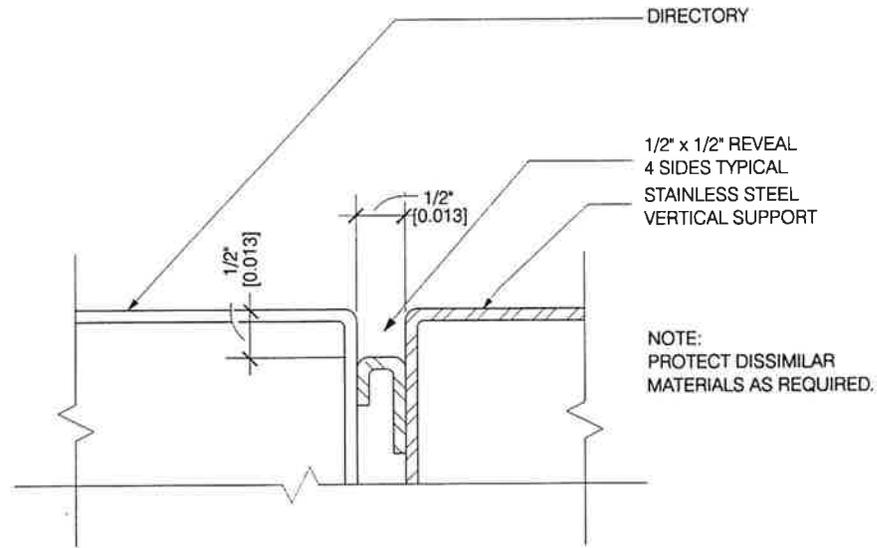

<b>12</b>	<b>12</b>	DETAIL
MP-54	GR213	N.T.S.


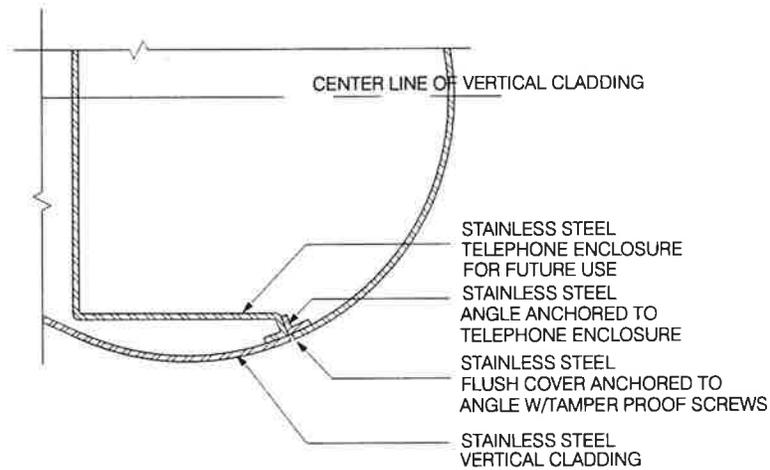


<b>13</b>	<b>13</b>	DETAIL
MP-54	GR213	N.T.S.

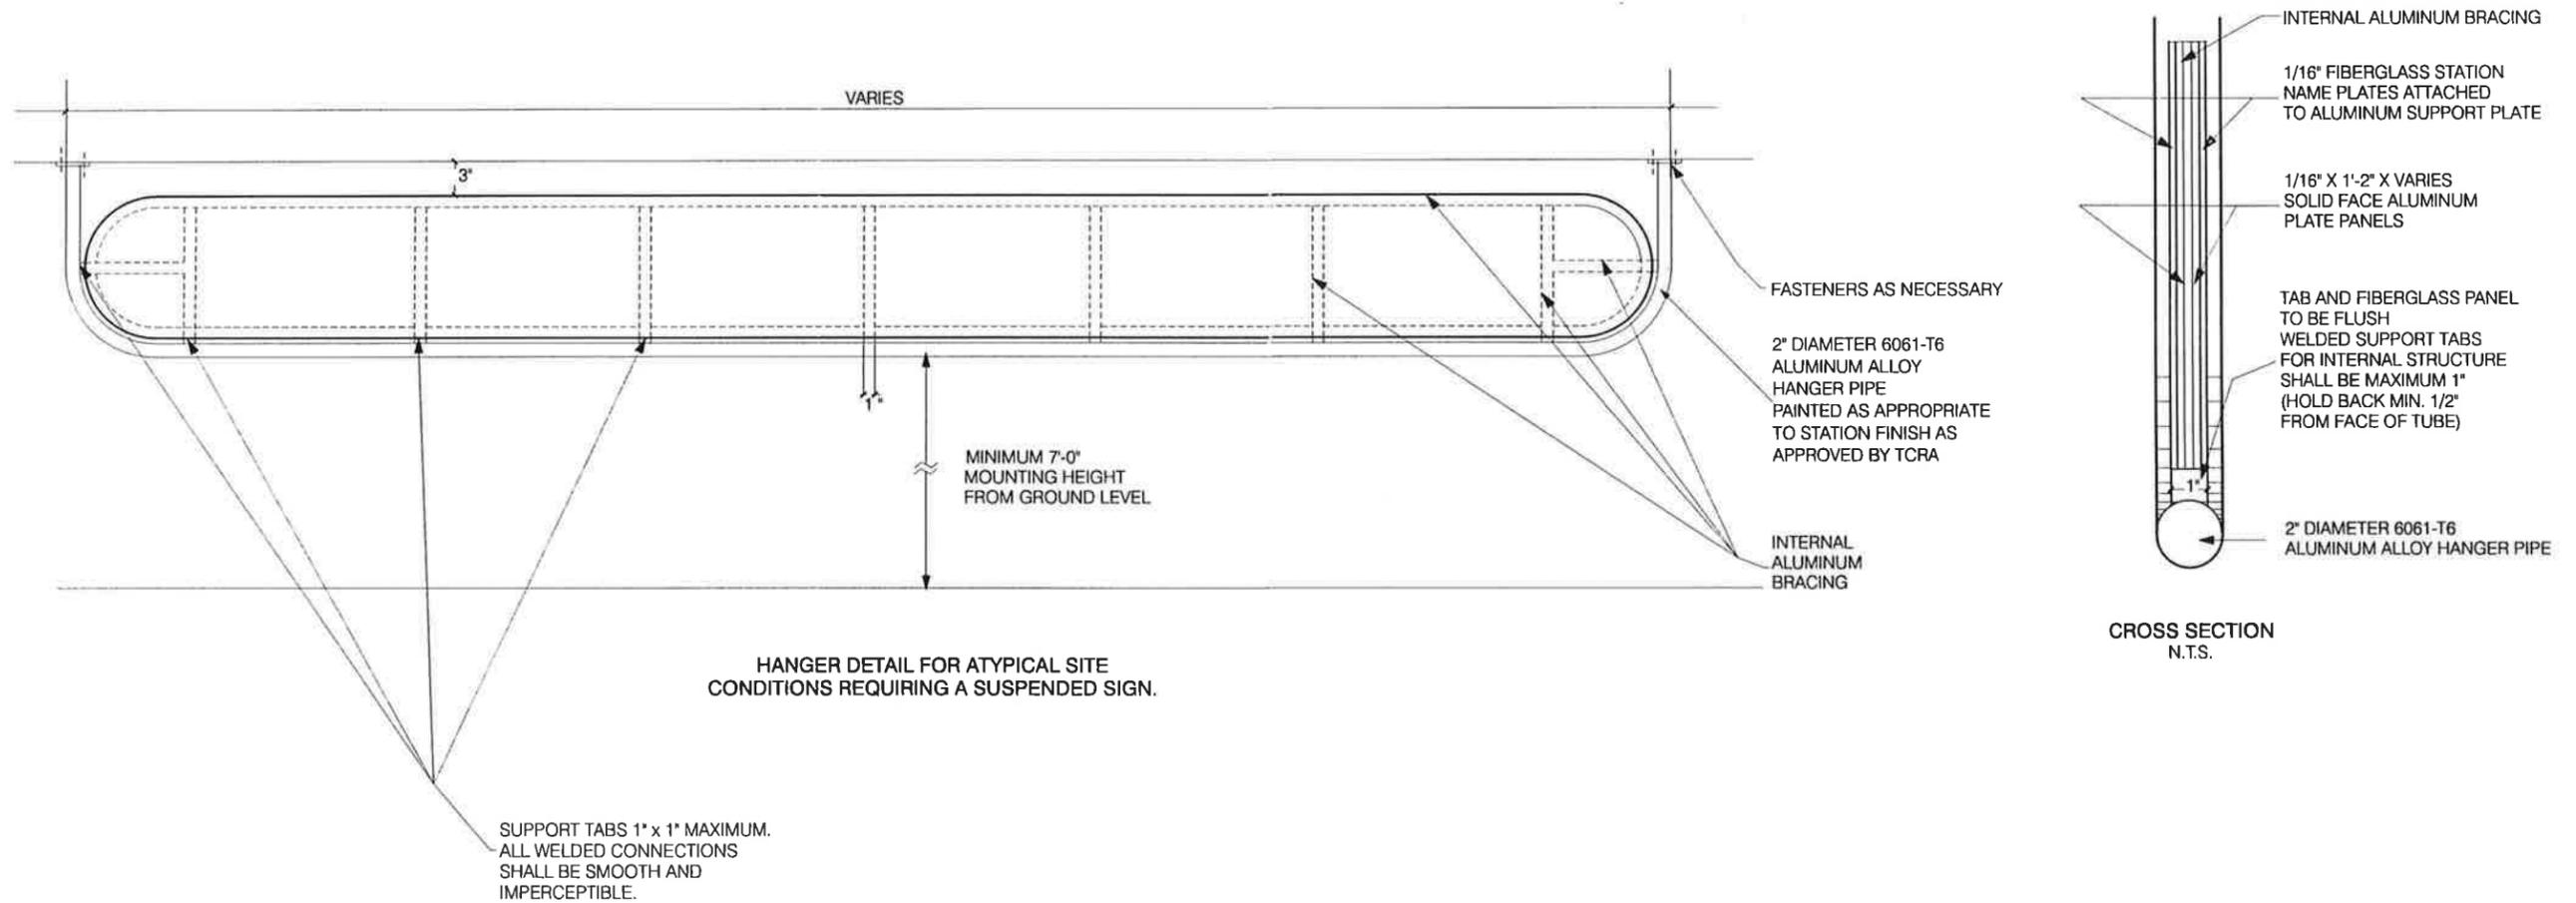

1 MP-55 1 GR2.14 DETAIL, SIGN TYPE C-1 AND C-2. SUGGESTED HANGER ATTACHMENT. SCALE: 3/4" = 1'-0"

**SIGN TYPE FM1-FM2 FLAG MOUNT DETAIL**

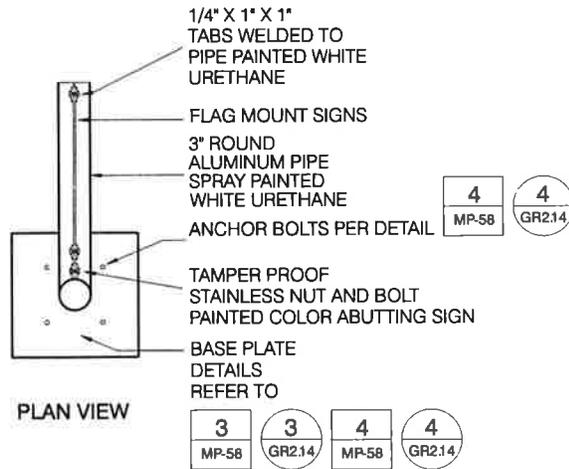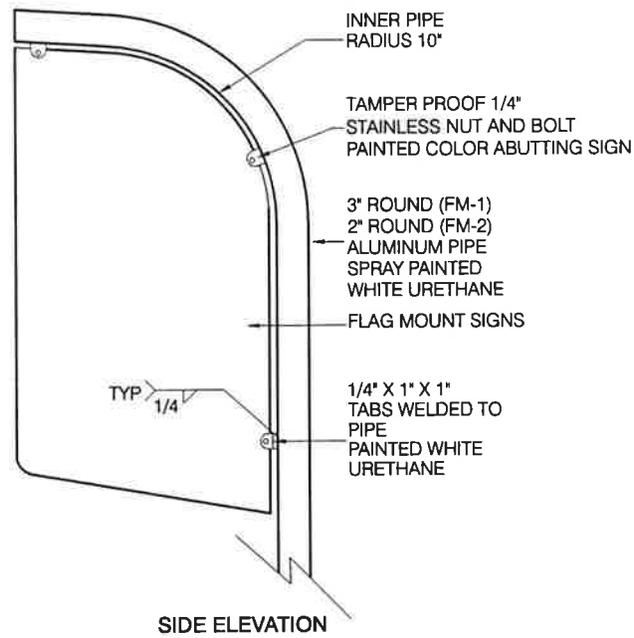


**1** **1** **DETAIL. SIGN TYPE FM-1, FM-2 FLAG MOUNT SIGN**

MP-56 GR2.12


SCALE: 3/4" = 1'-0"




**SIGN TYPE C-3 POST MOUNT STATION IDENTITY**

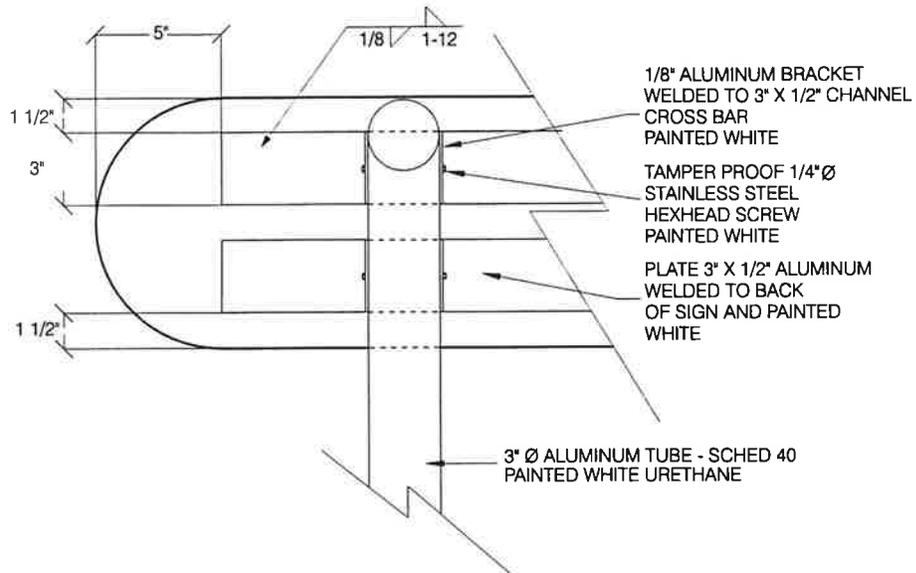

**REAR ELEVATION**

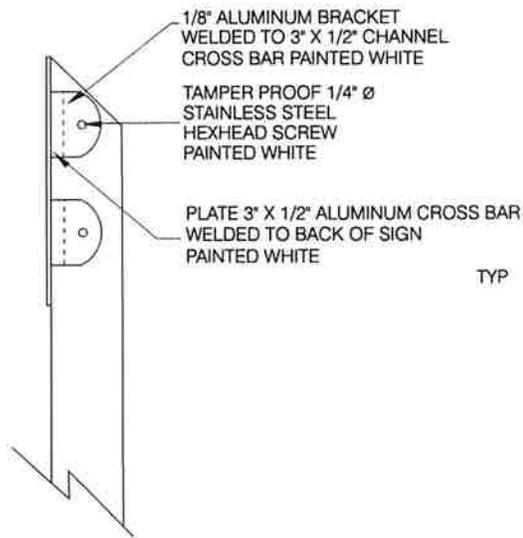

**SIDE ELEVATION**

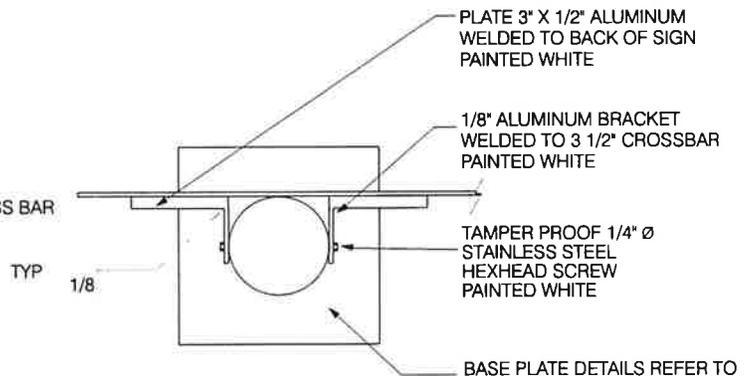

**PLAN VIEW**

BASE PLATE DETAILS REFER TO

3 MP-58	3 GR2.14
4 MP-58	4 GR2.14

FOR SURFACE MOUNTING,  
PAINTED WHITE,  
FOR CONCRETE FOOTING  
AS REQUIRED

5
MP-57


5
GR2.12

DETAIL. SIGN TYPE C-3 - DOUBLE POST MOUNT TRACK IDENTITY SIGN


N.T.S.

SCALE 1-1/2" = 1-0"



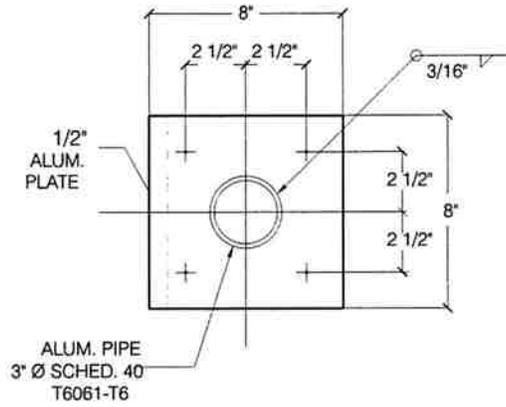


<b>3</b>	<b>3</b>	<b>DETAIL. POST MOUNT</b>
MP-58	GR2.14	SCALE 1-1/2" = 1'-0"

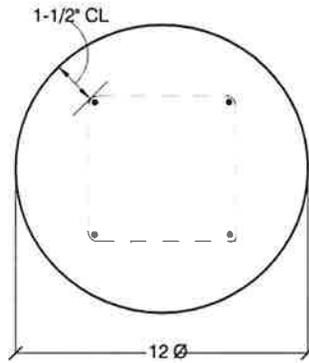


<b>4</b>	<b>4</b>	<b>DETAIL. POST MOUNT</b>
MP-58	GR2.14	SCALE 1-1/2" = 1'-0"

SCALE 1 1/2" = 1'-0"



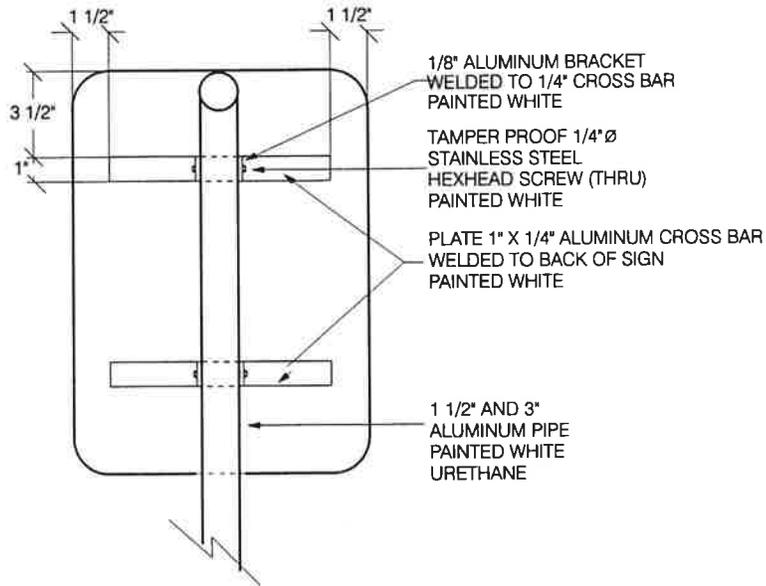

**BACK ELEVATION**


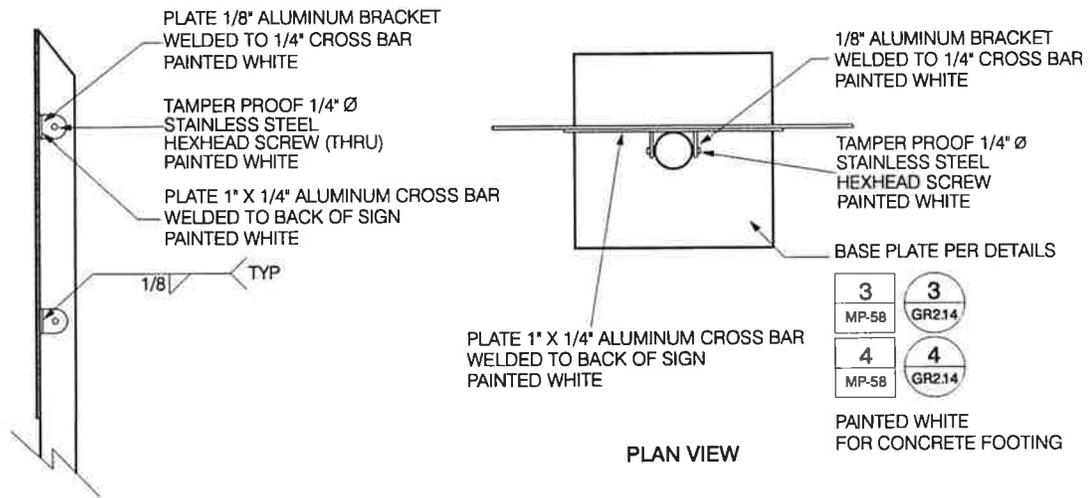


**SIDE ELEVATION**

4	4	DETAIL. SIGN TYPE PM, POST MOUNT SIGN
MP-59	GR2.12	

SCALE 1 1/2" = 1'-0"





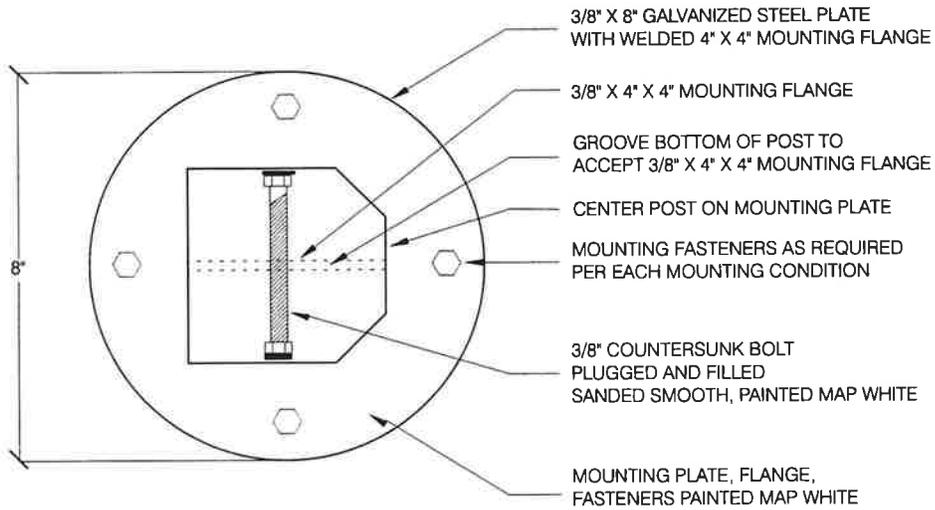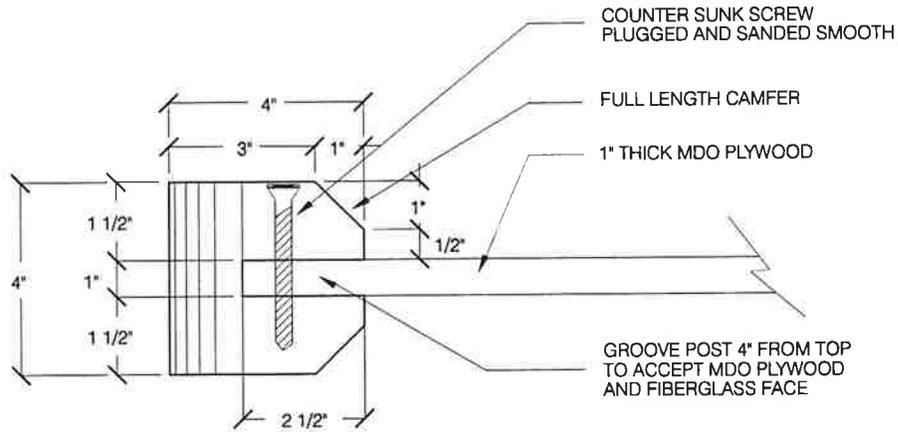

**2** **2** **DETAIL. SIGN TYPE PH - PHASING SIGN.**  
MP-60 GR214 SCALE 3" = 1'-0"

SCALE: 3" = 1'-0"



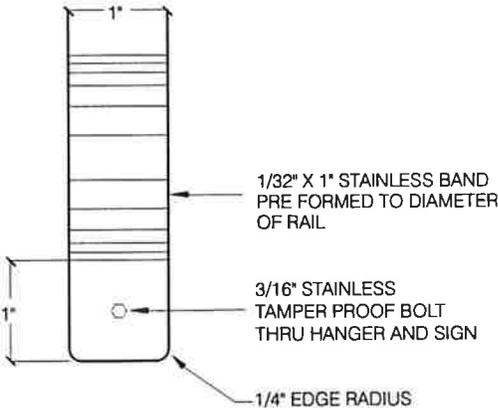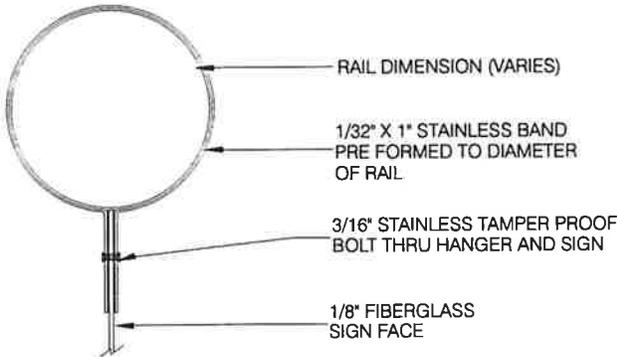



6
MP-61

6
GR2.12

DETAIL. SIGN TYPE RM - RAIL MOUNT


NTS



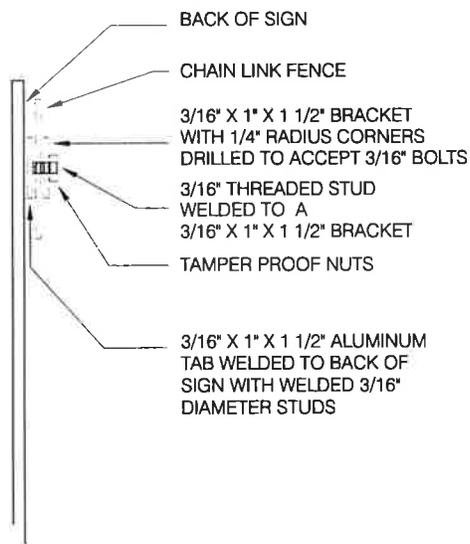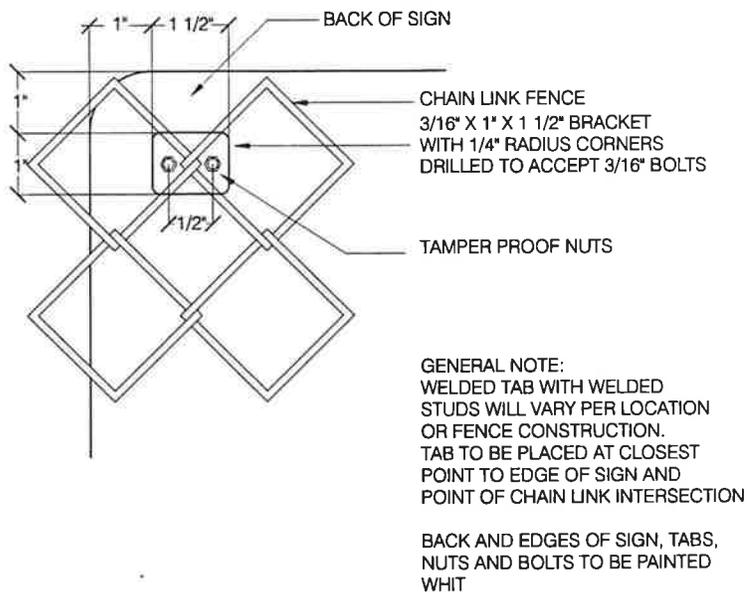

**7** **7** DETAIL TYPICAL SIGN TYPE F - FENCE MOUNT SIGN  
 MP-62 GR212 NTS



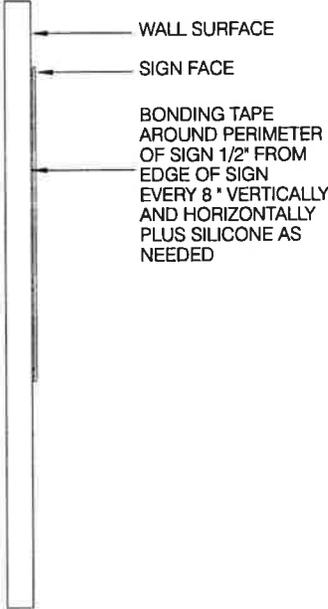


SIDE VIEW

<b>3</b>	<b>3</b>	DETAIL SIGN TYPE PL - PLAQUE, WM - WALL MOUNT SIGN
MP-63	GR2.12	NTS



# SIGN TYPE LM ADA BAR DETAIL


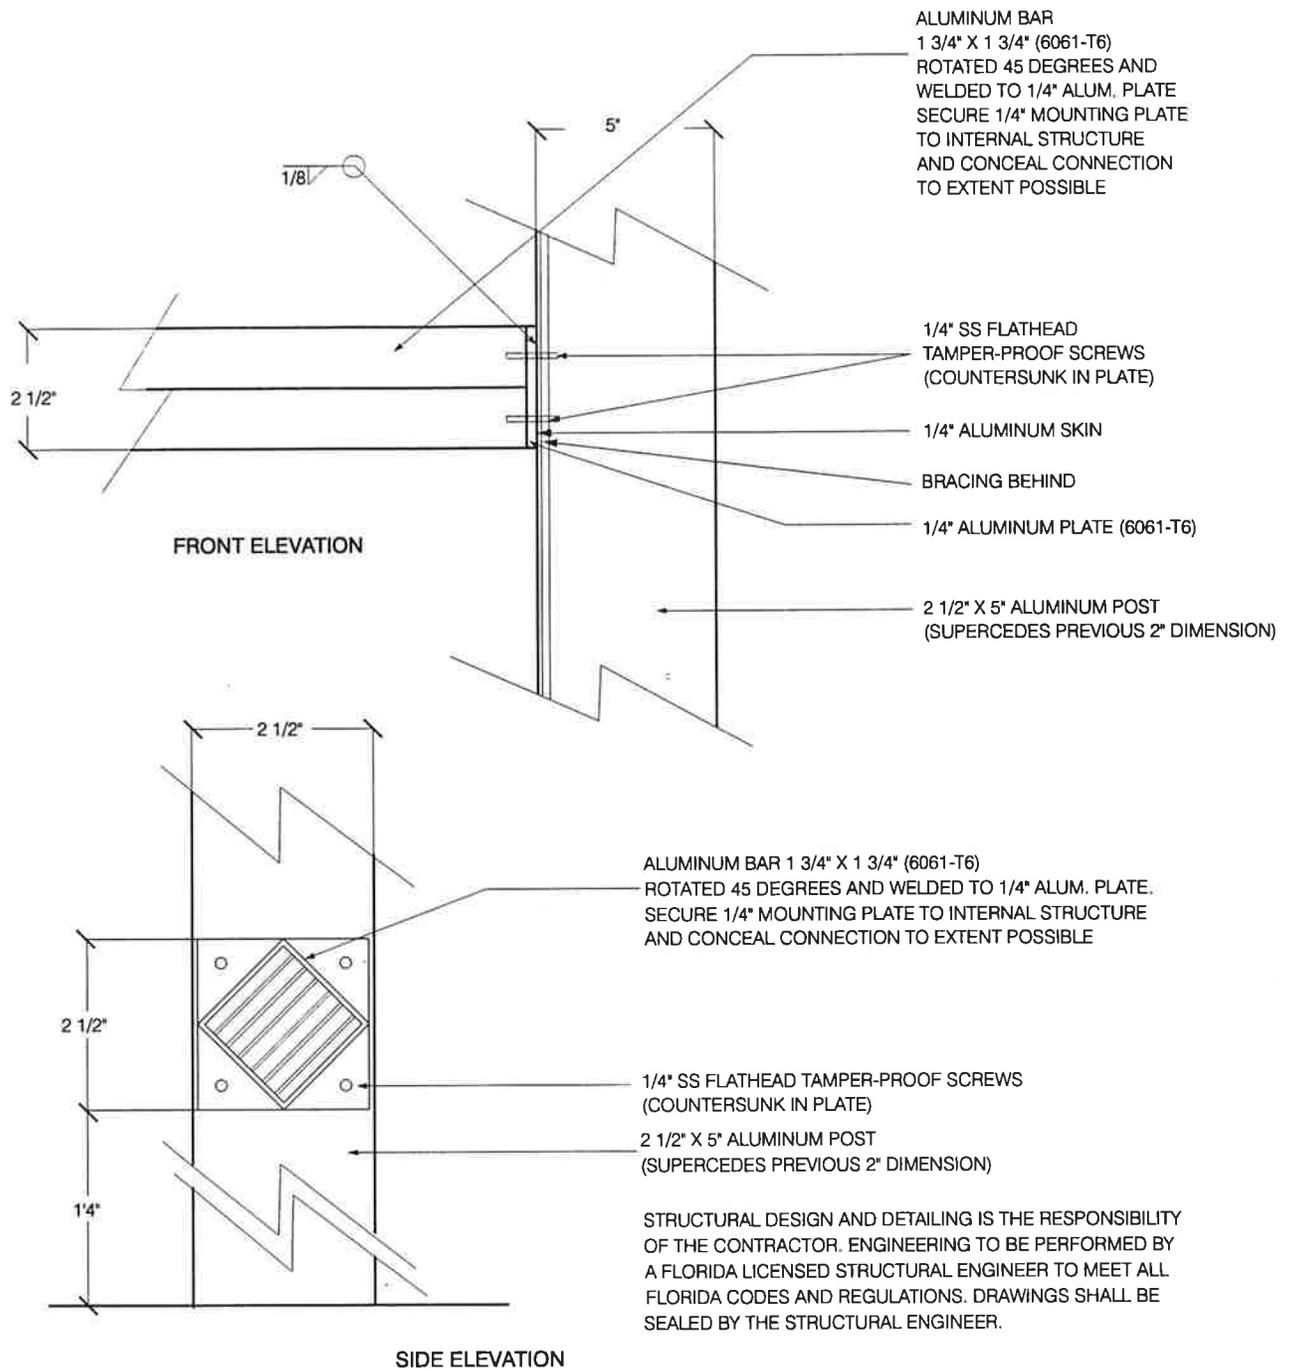


DETAIL. SIGN TYPE LM - ADA "FEELER" BAR

NTS



**SIGN TYPE PH ADA BAR DETAIL**

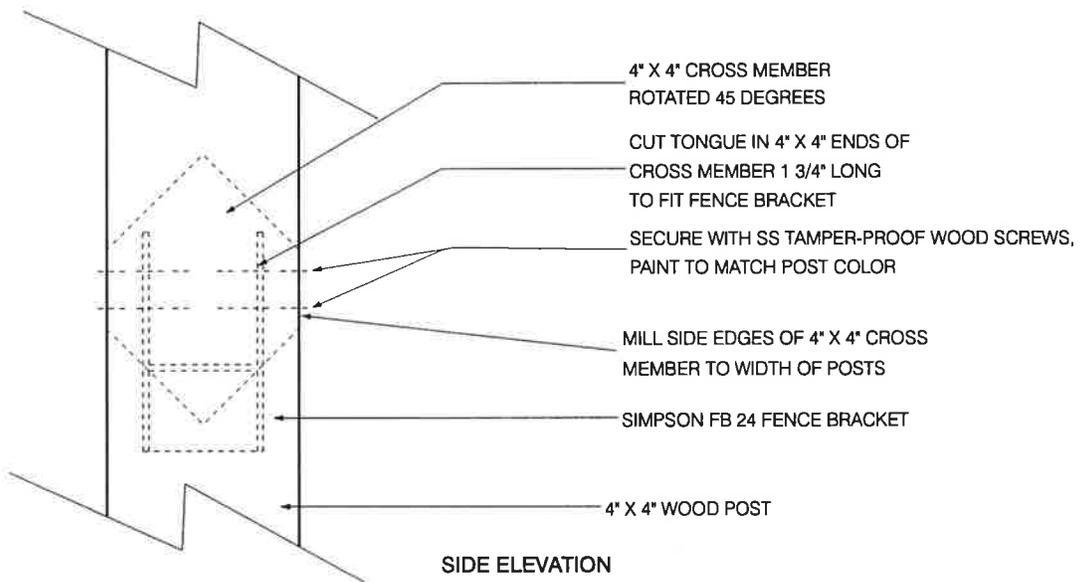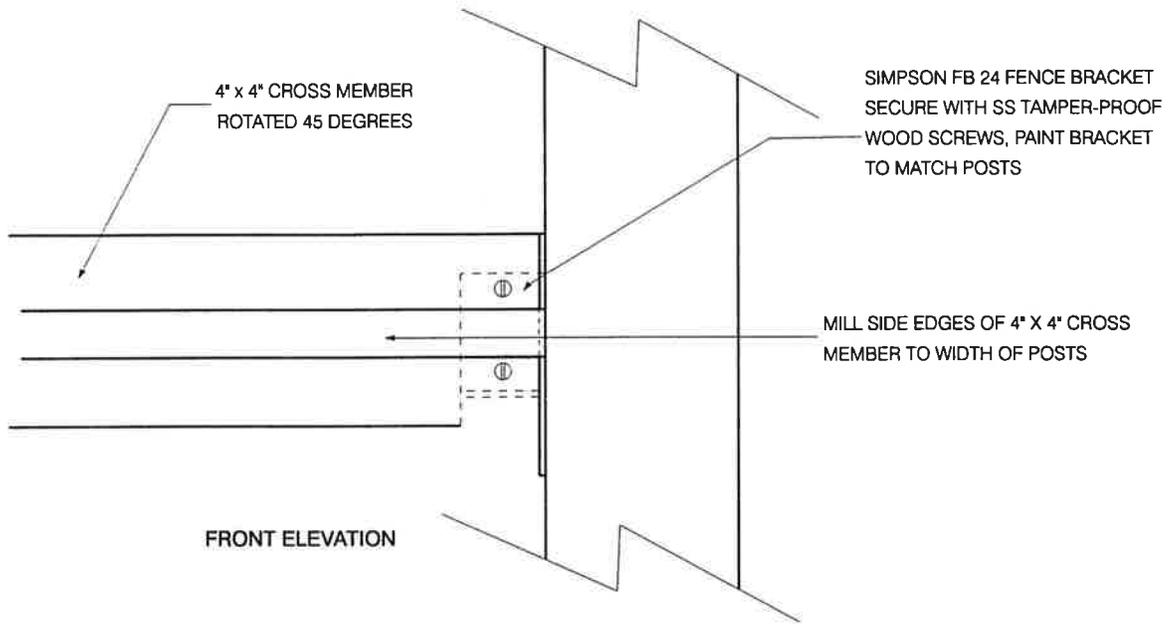

DETAIL. SIGN TYPE PH - ADA "FEELER" BAR

NTS

